

ESSENCE[®]

Essence is the crowd favorite for creating a more comfortable and attractive space. Designed for power, versatility, and sophistication, its performance transforms stuffy conditions and offers any setting a centerpiece of style. Quiet and efficient, Essence lets you provide an enjoyable experience that keeps employees motivated, customers engaged, and guests in awe of your space.



KEY FEATURES

- ▶ **Eight anodized airfoils** with winglets and safety restraints
- ▶ **Virtually silent** gearless direct-drive motor
- ▶ **Lightweight design** mounts to bar joists, beams, purlins, and wood frames
- ▶ **Variety of control options** for convenience and efficiency
- ▶ **Indoor and covered outdoor** models available to fit any space
- ▶ **Color customization** and integrated LED kit available to optimize your style

DIAMETER

8-14 FEET
(2.4-4.3 METERS)

MOUNTING

**I-BEAMS, BAR JOISTS,
SOLID BEAMS, AND PURLINS**

CONTROL

**VARIABLE-SPEED
WIRED/WIRELESS
WALL MOUNT**

WARRANTY

UP TO
10 YEARS
MECHANICAL

UP TO
10 YEARS
ELECTRICAL





**COMFORT WITHOUT
COMPROMISE**

**DISCOVER MORE
ABOUT ESSENCE**

Learn more at bigassfans.com/essence
or call **877.BIG.FANS** for a free custom quote.

ESSENCE

THE BEST FAN FOR A BIG SPACE, INDOORS OR OUT

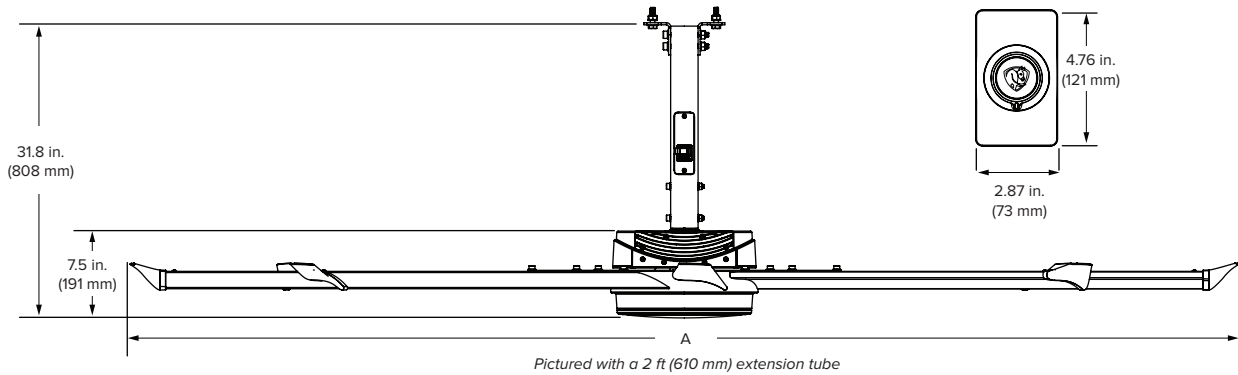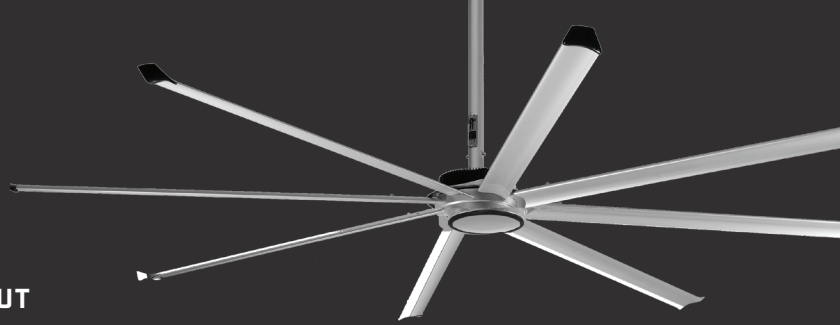


Technical Specifications

Diameter (A)	Weight ¹	Max Speed	Input Power and Required Breaker	Airfoil Clearances ²	Sound at Max Speed ³	IP Rating	Max Operating Temperature	Environment ⁴
8 ft (2.4 m)	75 lb (34 kg)	158 RPM	110–125 VAC, 1 Φ, 50/60 Hz, 10 A 200–240 VAC, 1 Φ, 50/60 Hz, 10 A	2 ft (0.6 m) on sides 2 ft (0.6 m) below ceiling deck	< 35 dBA	IP43	-4°F to 131°F (-20°C to 55°C)	Suitable for indoor or covered outdoor spaces
10 ft (3 m)	81 lb (37 kg)	107 RPM						
12 ft (3.7 m)	88 lb (40 kg)	76 RPM						
14 ft (4.3 m)	96 lb (44 kg)	56 RPM						

Construction Features

Airfoils	Motor and Drive	Certifications ⁵	Mounting	Accessories	Colors
Eight anodized Mini-Ellipto airfoils with winglets (black or silver)	Gearless direct drive motor	UL Standard 507 and CSA Standard 22.2 No. 113 	Standard upper mount installs to bar joists Optional kits allow for mounting to I-beams, solid beams, and purlins	LED Light Wireless Wall Controller	Standard color options: White motor housing with silver trim, airfoils, and winglets Silver motor housing and airfoils with black trim and winglets Stealth Black: Black motor housing, trim, airfoils, and winglets Individualize your fan with one of our classic color upgrades, or work with our design consultants to create a shade that's all your own.

Standard Color Options

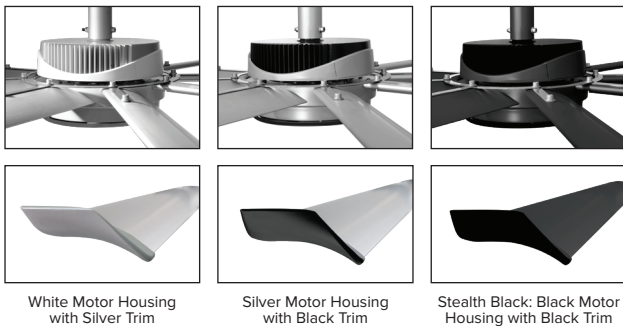

LED Light (Optional)



Control Options



¹ Weight does not include mount or extension tube.

² Suitable for ceilings as low as 12 ft (3.7 meters). Measure the distance from the tip of the winglet to the ceiling or major obstruction.

³ Fans are sound tested a maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.

⁴ Damp-rated fans installed in covered outdoor locations must have fixed/permanent full overhead coverage extending at least 2 ft (0.6 m) out from the winglets on all sides. Not suitable for salt air environments.

⁵ Certifications listed here apply to the fan and do not include accessories.

Lead times may vary. See full warranty for coverage information.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500