

A decorative graphic on the left side of the slide consists of a vertical black line and a horizontal black line intersecting at a point. To the left of the intersection, there are three overlapping squares: a yellow one on top, a red one on the left, and a blue one on the bottom. The squares have a slight gradient and are partially obscured by the lines.

Tutorial A

Objective Measurement of User-Perceived Audio and Video Quality



Objective Measurement of User-Perceived Audio and Video Quality

Lectures:

Measurement of Audio Quality, Steve Voran, (≈ 30 min)

Measurement of Video Quality, Steve Wolf, (≈ 30 min)

Demonstration:

Real-Time, In-Service Video Quality Measurement, Margaret Pinson, (≈ 20 min)

All Presenters are with:

Institute for Telecommunication Sciences, Boulder Colorado

www.its.blrdoc.gov/audio www.its.blrdoc.gov/n3/video

{svoran, swolf, mpinson} @its.blrdoc.gov



Combined A/V (MM) Quality

- Perceived overall A/V quality depends on
 - Audio quality
 - Video quality
 - A/V synchronization
 - Importance audio and video in application

Measurement of Audio Quality

- Motivation
- Subjective Measurement
 - Techniques
 - Issues
 - Open Questions
- Objective Estimation
 - Basic Concepts
 - Perception-based Approach
 - Standardized Algorithms
 - Moving Forward





One Major Motivation

Telecommunications: Five-Way Trade-Off

- Complexity vs. delay vs. bit rate vs. robustness vs. speech quality
- The first four are fairly easily defined and measured
- Speech quality is more challenging
 - Constrained optimization of coders and/or channels
 - System monitoring and maintenance alerts
 - Picking “best” designs for standardization
 - Equipment evaluation for purchase



Demonstration: Speech Coding Algorithms

- All have nominal 3 dB bandwidth of 300-3400 Hz
- 4 Talkers: female, male, female, male
- Clear channel (no bit errors, lost packets or frames)

Demonstration: Speech Coding Algorithms

- Original Speech
- G.711 64 kbps PCM
- G.726 32 kbps ADPCM
- G.728 16 kbps LD-CELP
- GSM 13 kbps RPE-LTP
- G.729 8 kbps CS-ACELP
- G.723.1 5.3 kbps ACELP
- Fed. Standard 2.4 kbps MELP
- FS-1015 2.4 kbps LPC10e






Quality Assessment Challenges

- Signal dependent distortions
 - Male vs. female
 - Speech level
 - Language
 - Tones vs. speech
- Variety of distortion types
 - Buzz, robotic
 - Warble, shimmer
 - Muffled, flat
- Listener expectations
 - Fixed vs. wireless
 - Cost

Quality Assessment Challenges: Heterogeneous Network Paths

- Network is
 - Wired and wireless
 - Analog and digital
 - Circuit switched and packet switched

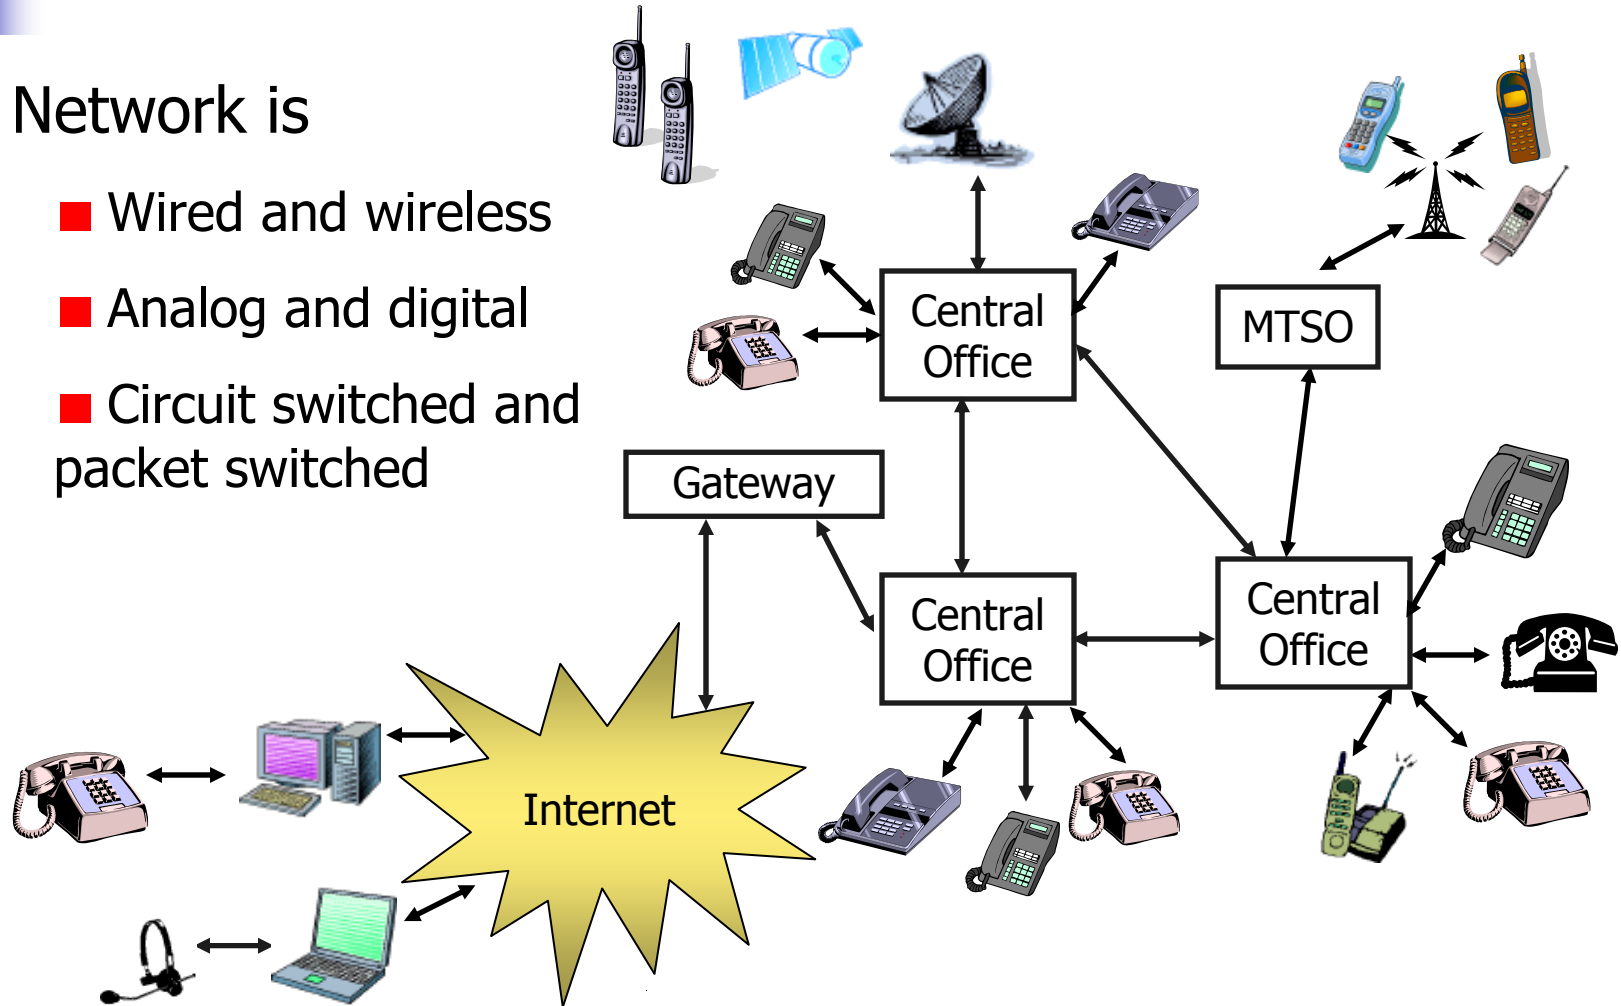



Quality Assessment Challenges

- Tandems, mixed tandems
- Channel issues:
 - Bit error rate, packet loss rate
 - Temporal distribution of errors
 - Delay variation
- Handset types and hands free
- Background noise – demo follows



Background Noise Demo


Speech Coder 4800 bits/second

- on airplane
 - original after speech coder
- in laundry room
 - original after speech coder
- on the boat with the radio
 - original after speech coder



Subjective Measurement: Have People Listen and Respond

Example: Absolute Category Rating Test

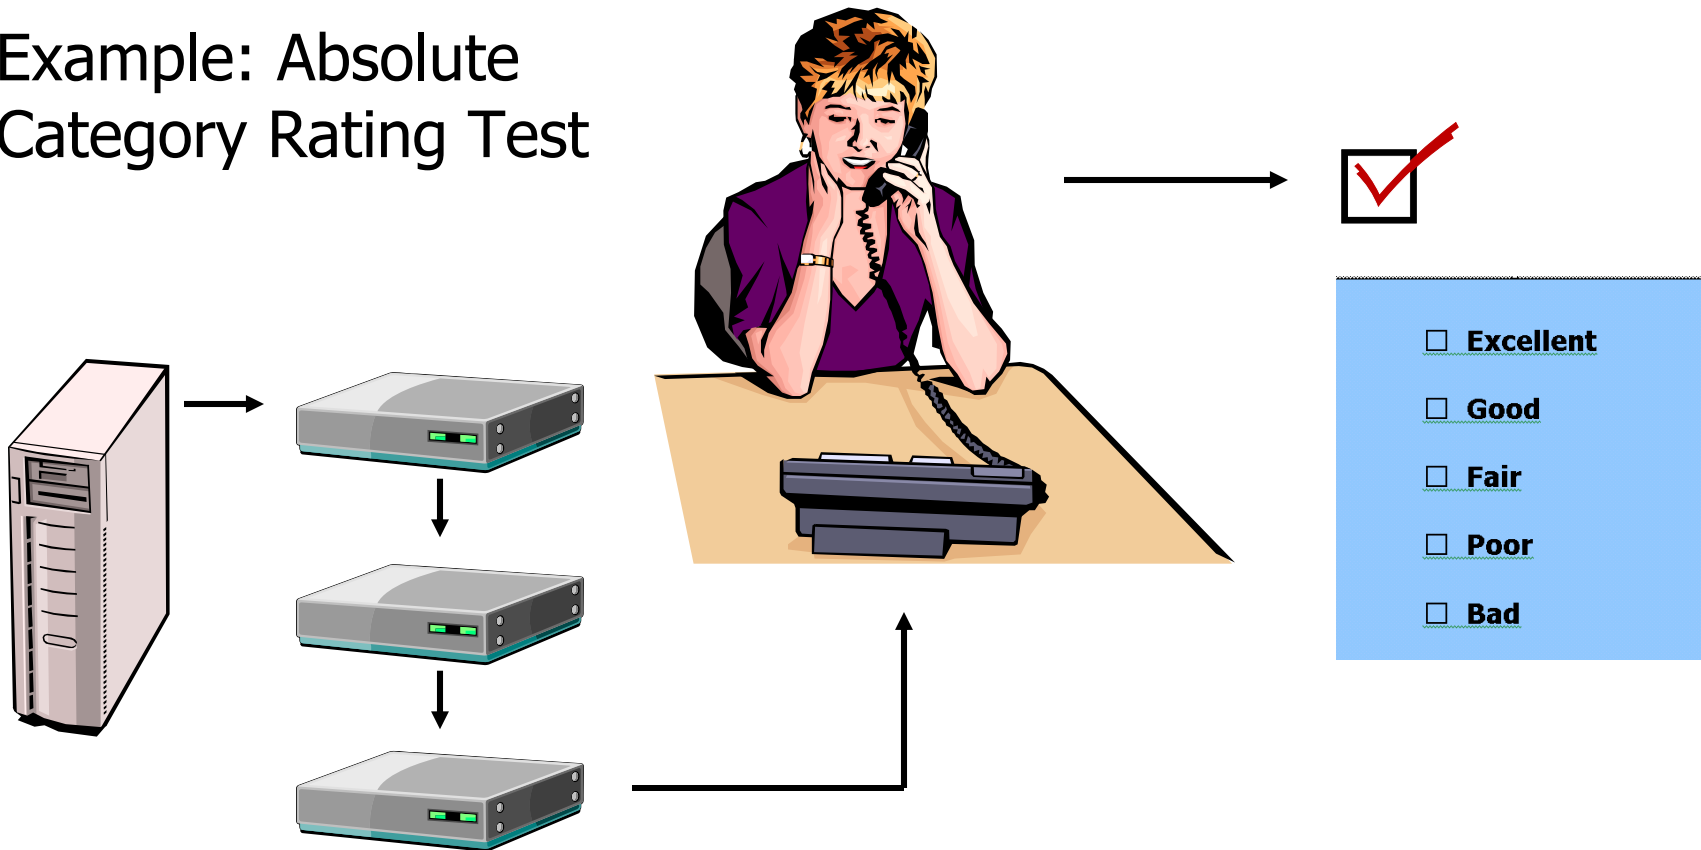

Excellent

Good

Fair

Poor

Bad



Subjective Measurement

- Advantages:
 - If done carefully, results are highly relevant (standards exist)
 - Can select relevant population of listeners
 - Can educate them about application
 - Can ask the most relevant question(s)



Subjective Measurement

- Disadvantages:
 - Expensive and time consuming
 - Controlled acoustic environment required
 - Transparent playback equipment required
 - Inherent spread of opinions - depending on confidence intervals required, 20 to 60 listeners may be required
 - Each listener may spend 30 to 120 minutes
 - Results not absolute, reference conditions required



ITS Subjective Measurement Capabilities

- ITS has two acoustically isolated rooms and associated laboratory equipment (pictures follow)
- Loudspeaker, headphone, or handset playback is available
- ITS has conducted numerous listening and conversation tests in conformance with applicable ITU Recommendations

Control Station for Subjective Testing Lab






Inside a Subjective Testing Room



Subjective Listening Tests


Subjects hear and score recordings

- Quality
- Effort
- Intelligibility
- Diagnostics

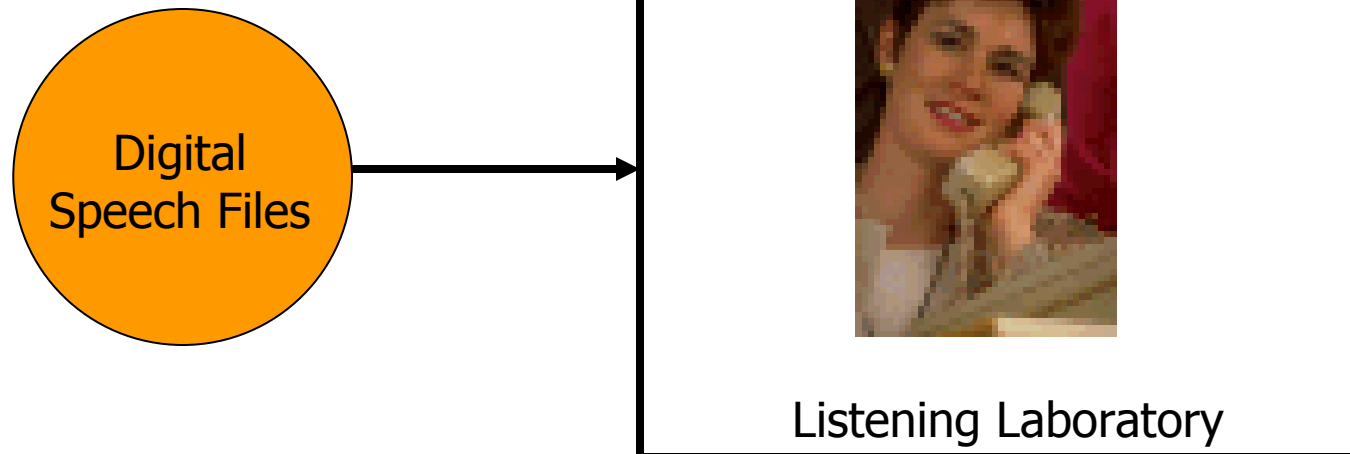

Subjective Conversation Tests

- Subjects use system under test for actual conversation
- Subjects score system under test
 - Quality
 - Effort

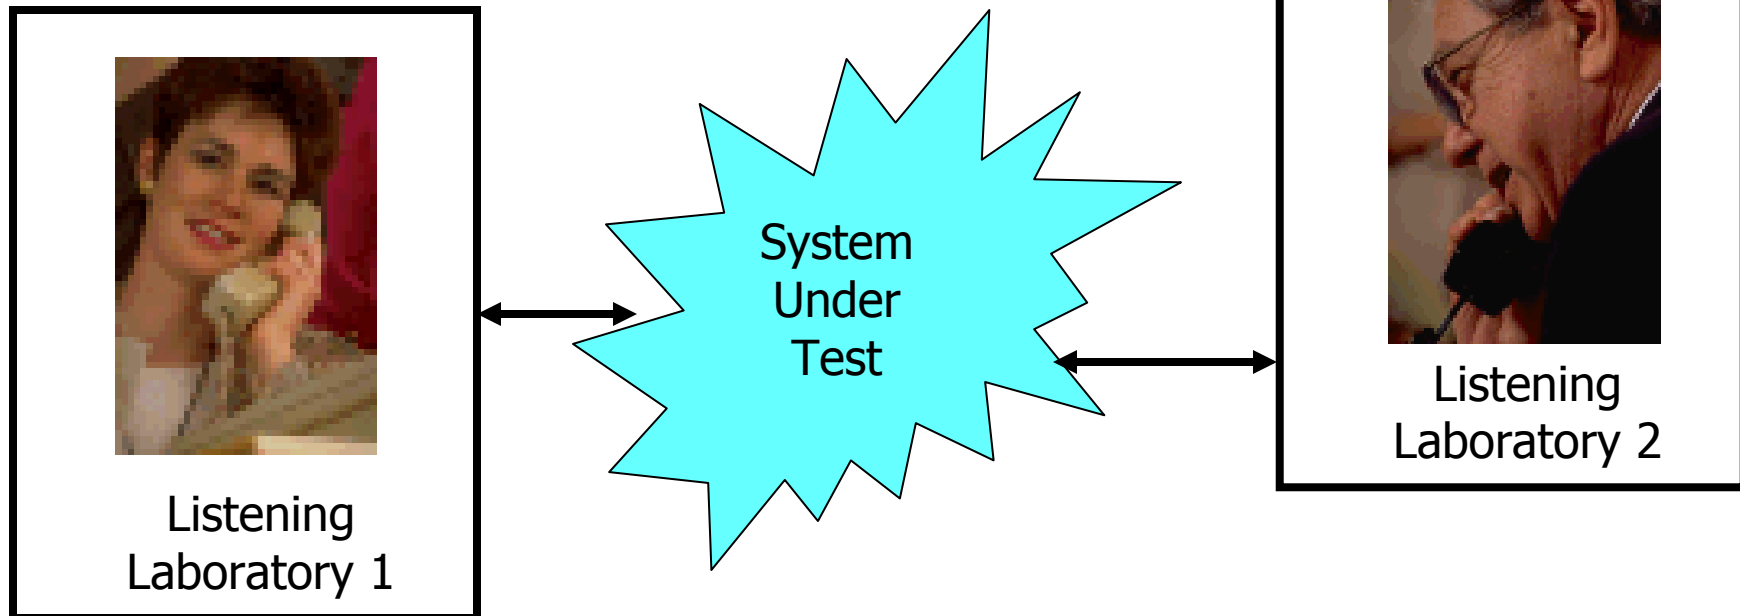



Considerations in Subjective Testing

- Listening instrument, expectations
- Background noise
- Selection of listeners: demographics, hearing acuity, prior knowledge, expectations
- Listener fatigue
- Properly balanced test material
- Randomization to prevent order effects



Subjective Listening Test Example 1

- Single stimulus
- Absolute category rating (ACR)
- Mean opinion score (MOS) scale

Please rate the speech quality

5=Excellent

4=Good

3=Fair

2=Poor

1=Bad

- Best suited for wide ranges of speech quality



Subjective Listening Test Example 2

- Dual stimulus (takes longer than single stimulus)
- Degradation category rating (DCR)
- Degradation mean opinion score (DMOS) scale
 - Please rate the degradation of the second sample
 - 5=Imperceptible
 - 4=Perceptible but not annoying
 - 3=Slightly annoying
 - 2=Annoying,
 - 1=Very annoying
- Scale mixes perception and opinion
- Able to resolve smaller quality differences




Issue - Time Varying Speech Quality


- Speech Quality in Telecom is no longer constant (e.g., wireless, VoIP)
- If quality varies moment by moment, what is the "overall quality"?

A Subjective Test

- A burst of higher quality in the middle of a ≈ 3 second recording
- Burst duration of 0 to 3 seconds
- Burst of lower quality also considered

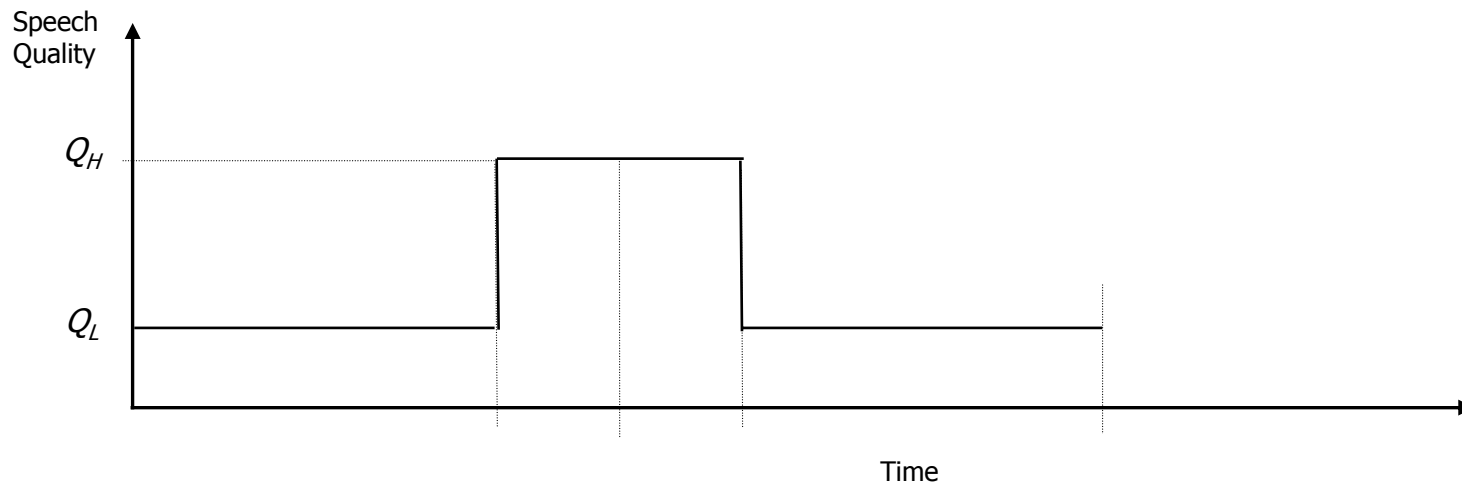

A Key Result

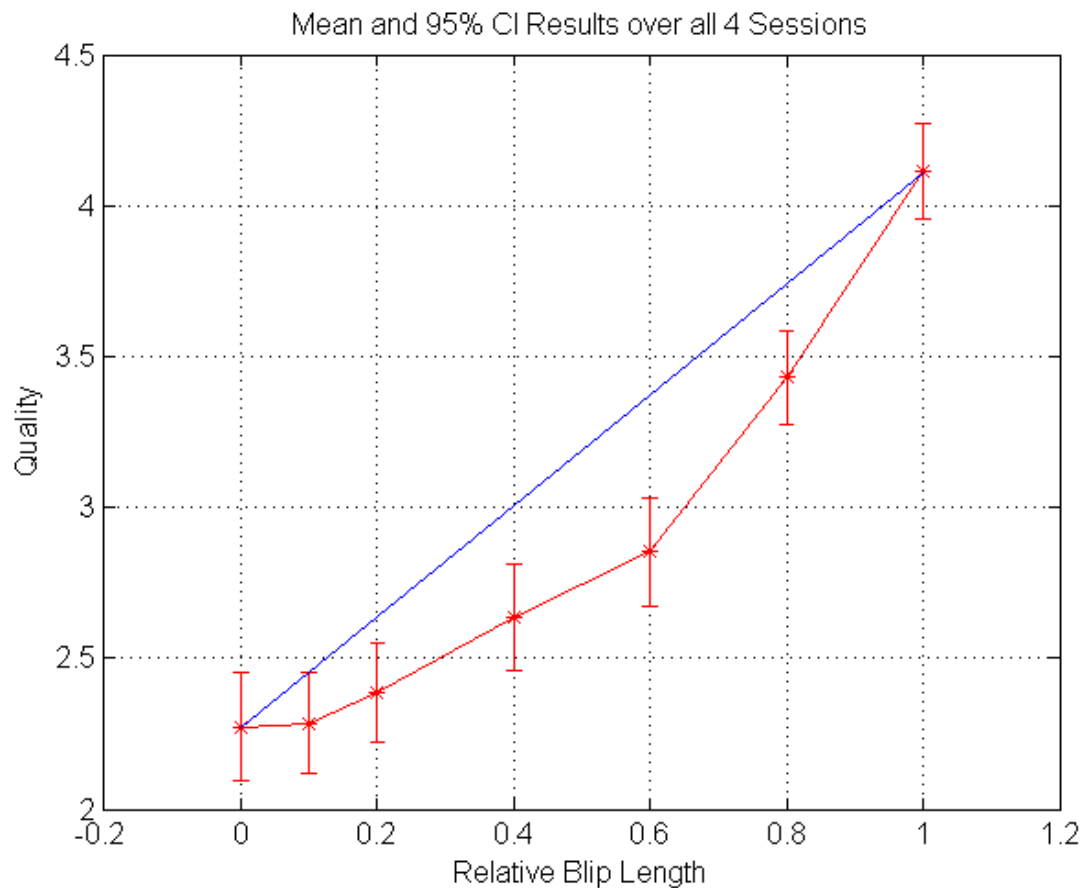

$$Q_L \approx 2.25$$

$$Q_H \approx 4.10$$


Mathematical mean
(blue line) is too
optimistic!



Issue – Fixed vs. Free Timing

- Most subjective tests force timing:
 - Hear 5-9 second recording
 - Rate its quality
 - Repeat
- Efficient implementation, control
- When do subjects naturally form opinions?
- ITS did pass/fail speech quality test, subjects could vote at *any* time after recording started

A Key Result

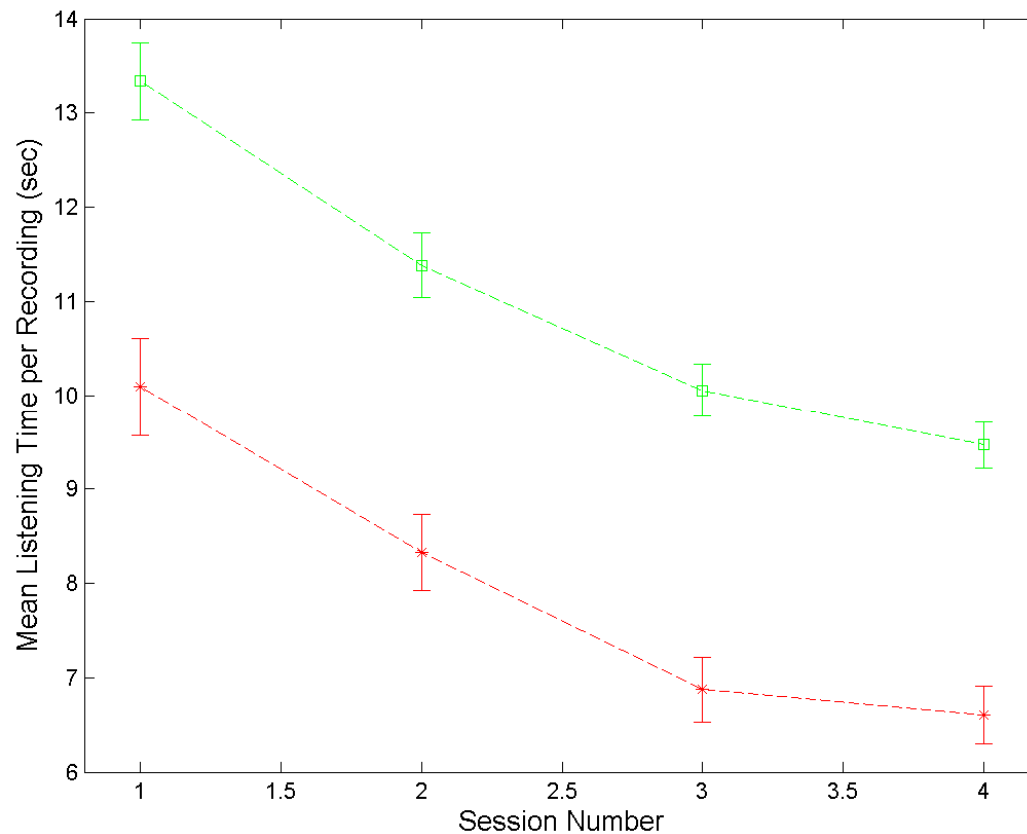

Green: listening times before "pass"

Red: Listening times before "fail"

Subjects are quick to criticize, slow to approve

Subjects speed up



Objective Estimation of Audio Quality

3 Main Approaches


- Telecom network element based (E-model)
- Measured network parameter based
- Audio signal based: DSP analysis of (sent) and received audio signals




Objective Estimation vs. Subjective Measurement

- + Fast, inexpensive and repeatable
- + Just need software and some common hardware (e.g. off the shelf PC)
- + Listener variable and all associated issues are removed
- + Results are absolute, reference conditions not required
- - Can only *estimate* perceived audio quality

DSP Analysis of Audio Signals

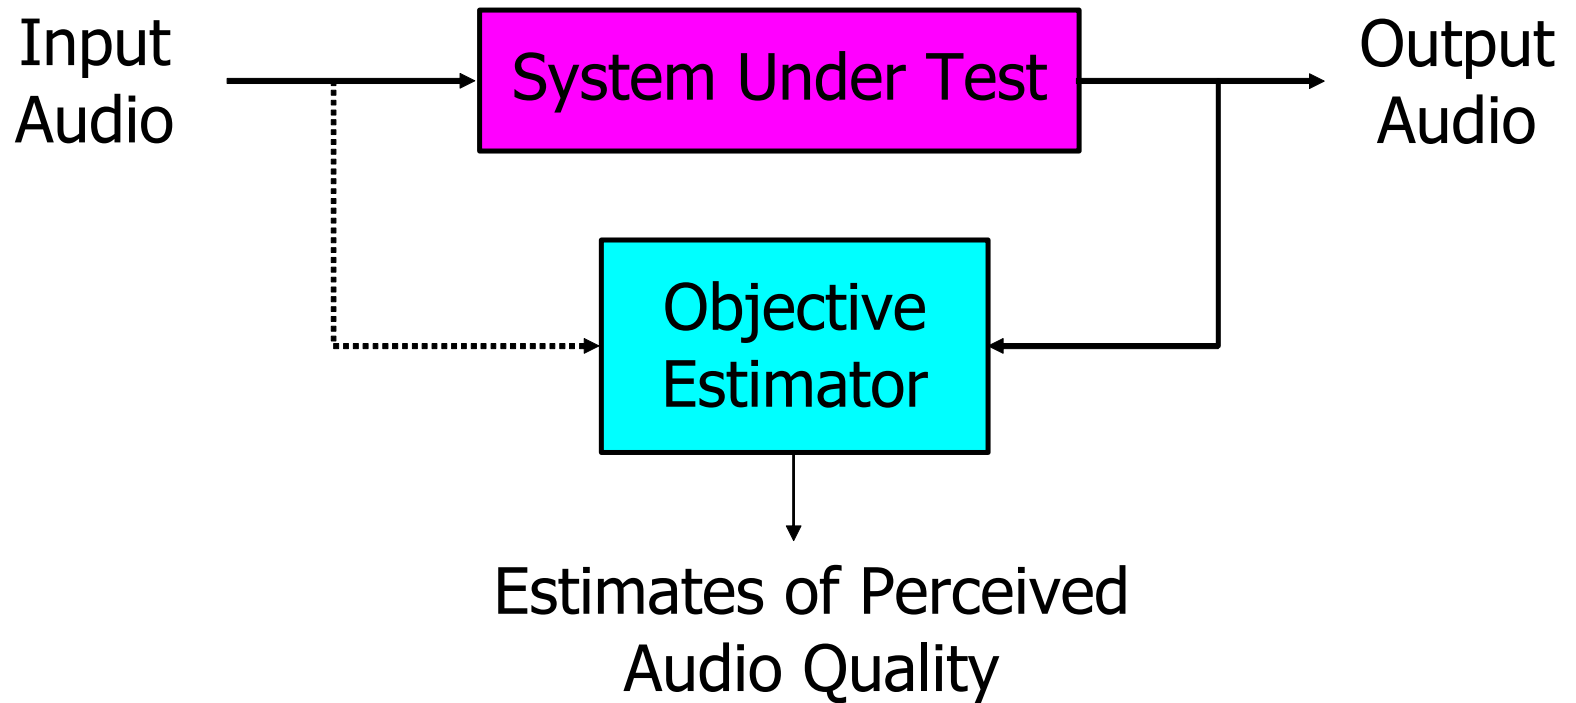

Details on Speech or Audio Quality Estimation

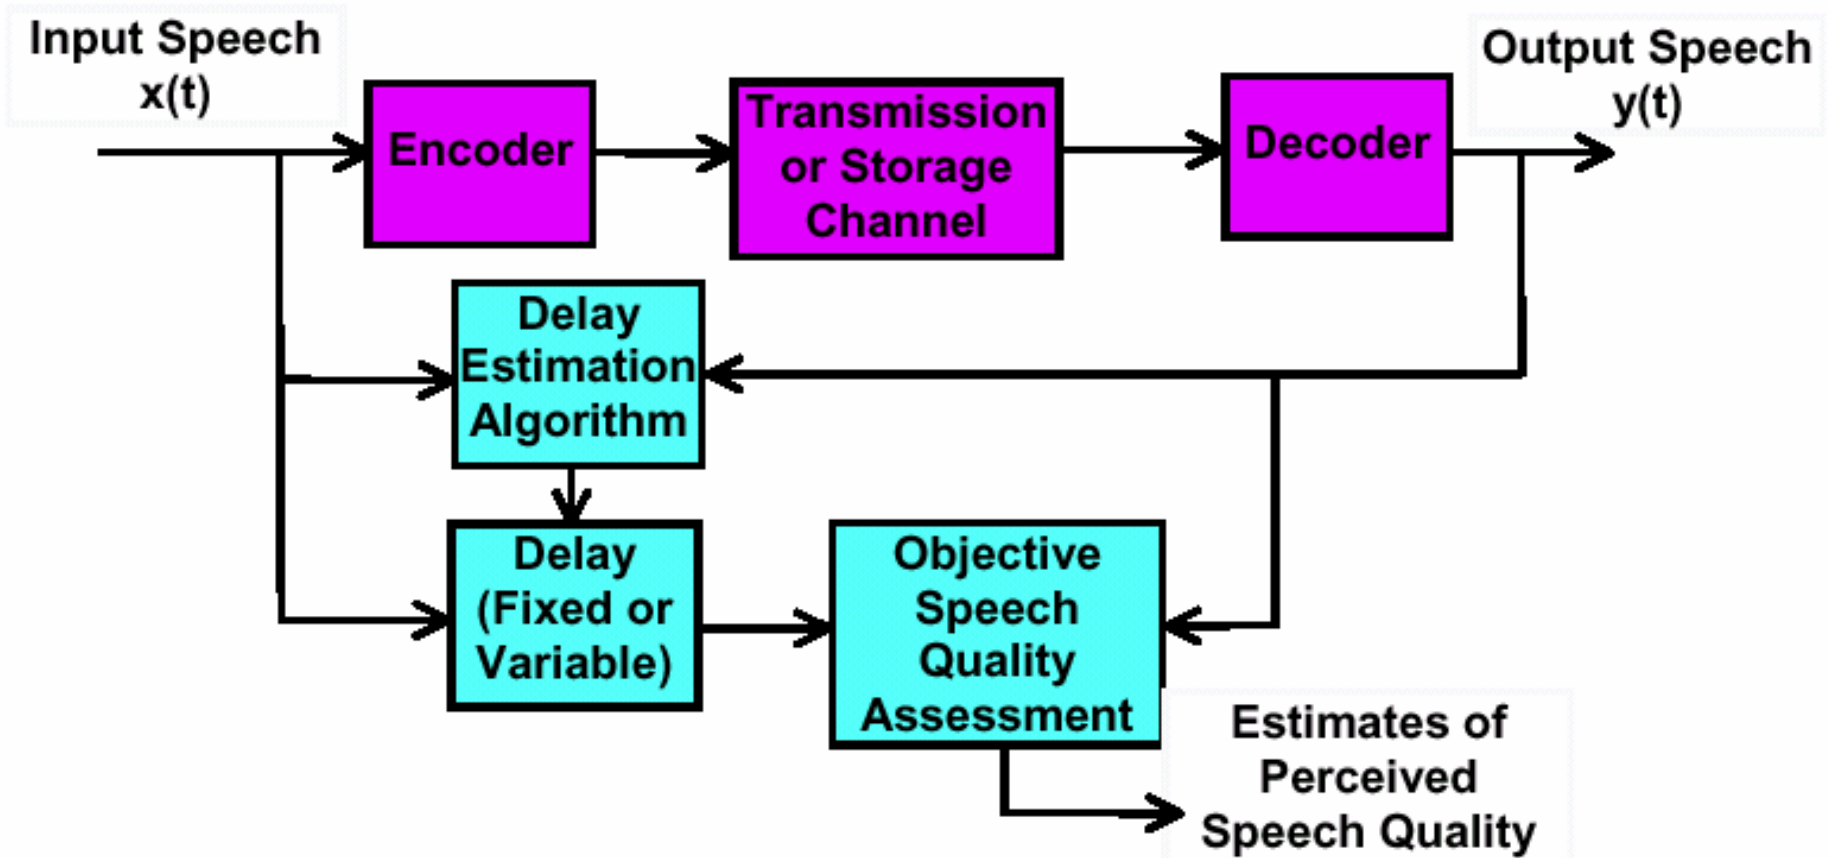



Nomenclature

- Algorithms that require input and output are sometimes called
 - Input/output
 - Two-ended
 - Full Reference
 - Intrusive
- Algorithms that require just output are sometimes called
 - Output only
 - Output based
 - Single-ended
 - Zero Reference
 - Non-intrusive
- Trade-off
 - Simplicity (output only) vs. Accuracy (input/output)

Use Waveforms to Estimate Quality?


- e.g., Segmental SNR

$$\text{SNRseg}_j = \frac{1}{N} \sum_{i=0}^{N-1} 10 \cdot \log_{10} \left(\frac{x_{j \cdot N+i}^2}{(x_{j \cdot N+i} - y_{j \cdot N+i})^2} \right), \text{SNRseg} = \frac{1}{M} \sum_{j=0}^{M-1} \text{SNRseg}_j$$

- Can measure coding noise or quantization distortion, each of which is related to audio quality
- Does not measure perceived audio quality in general
- Waveform fidelity is sufficient but not necessary for good audio quality

Example: Speech Coding

Codec A Codec B Codec A 

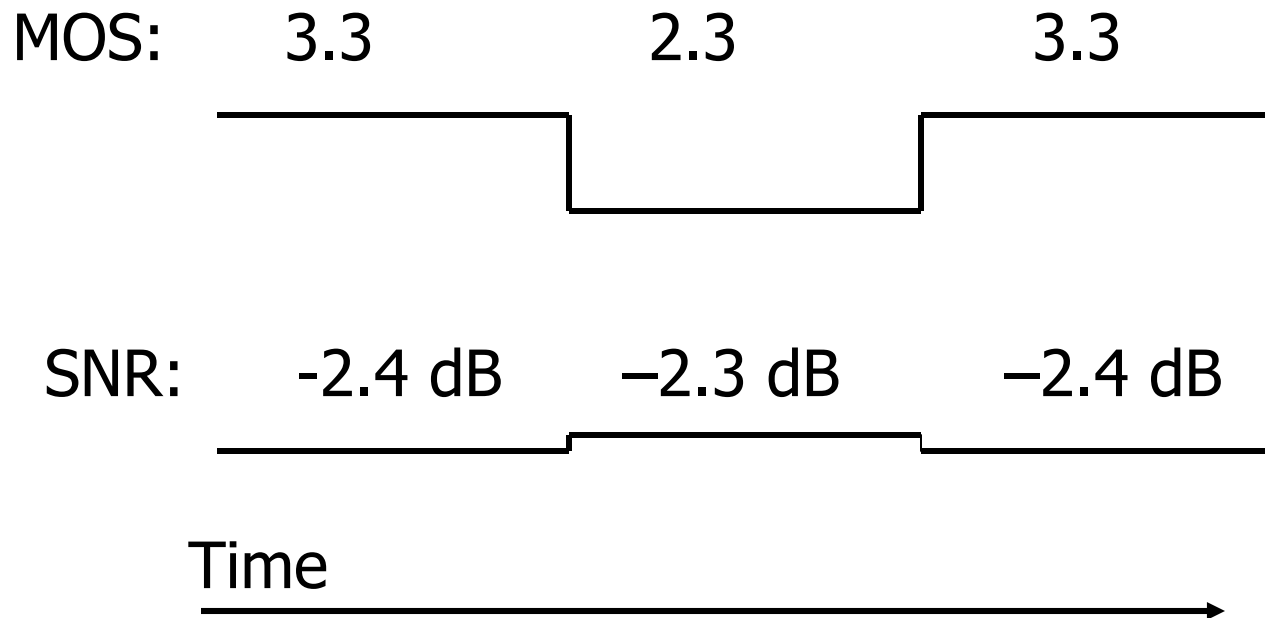


Parametric
Speech
Modeling

(not
Waveform
Coding)

Example: Music Coding

Codec 1: SNR=20 dB

Codec 2: SNR=20 dB

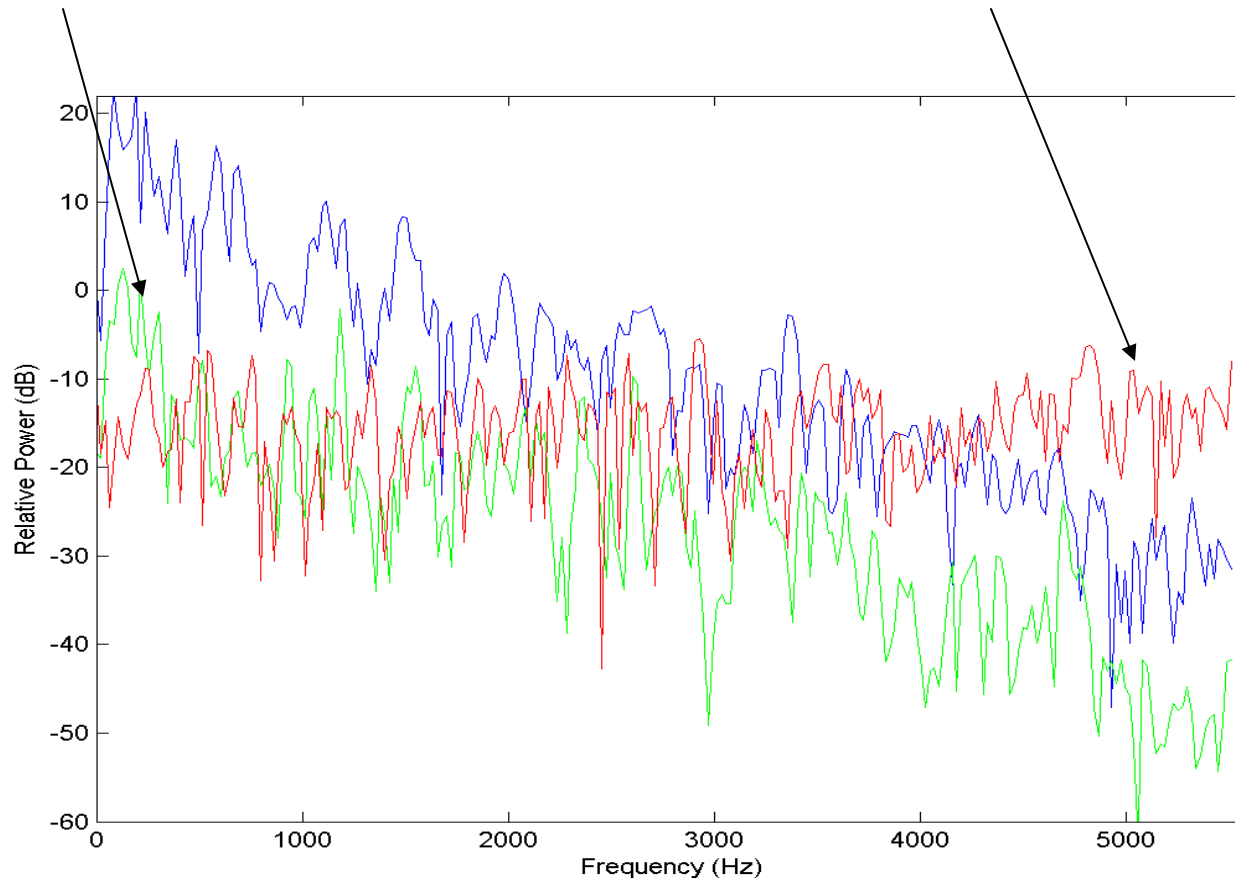

Perceptual
Coding


(not
Waveform
Coding)




What to Do?

- Waveforms are all we have, yet waveforms do not tell the whole story
- Emulate what humans do
- Perception-based approach

Perception-Based Approach, Input/Output

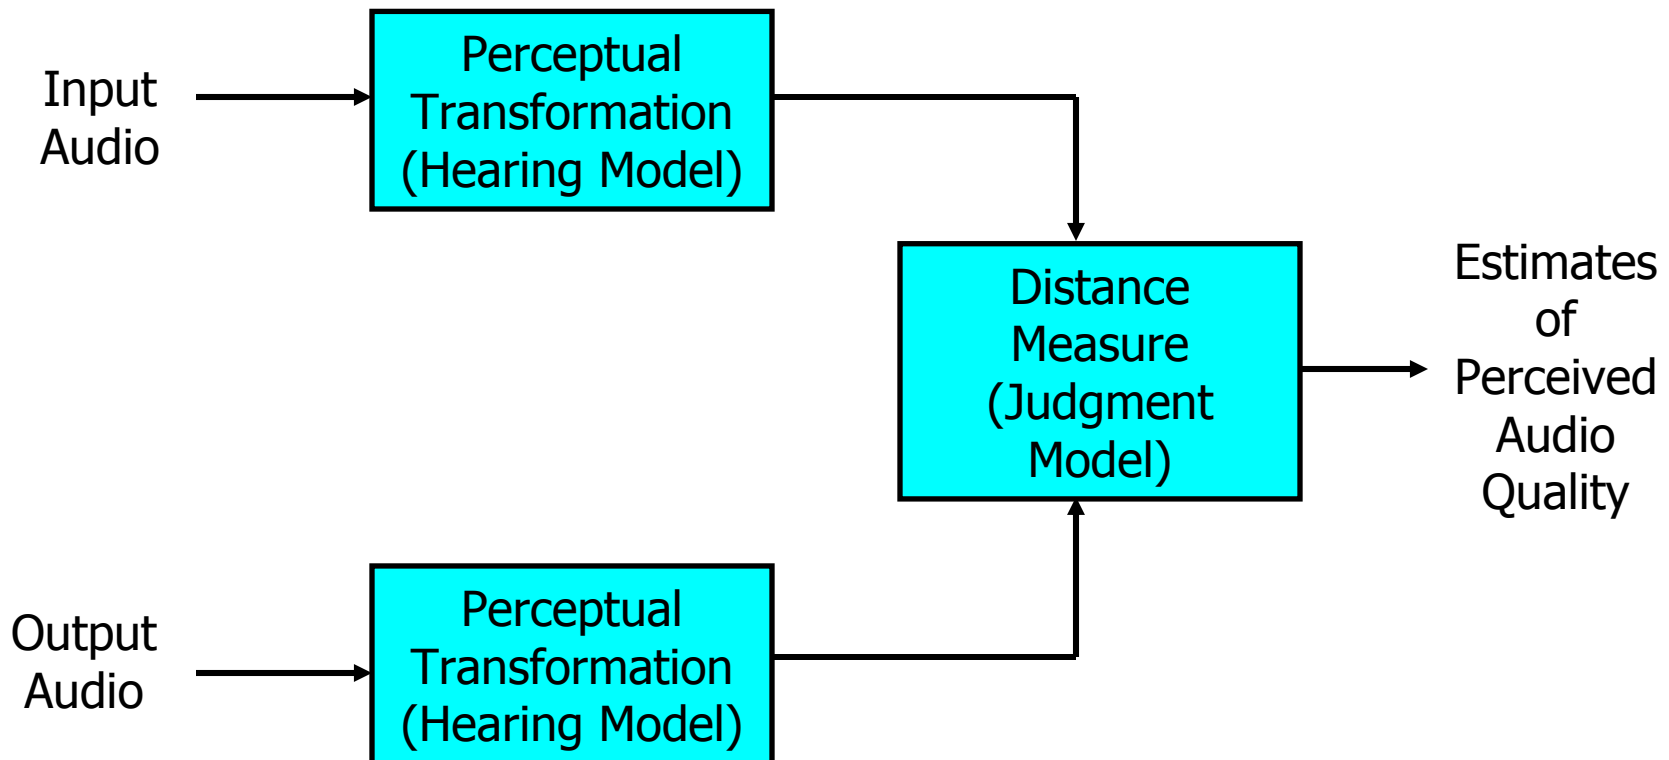

Perception-Based Approach, Output-Only

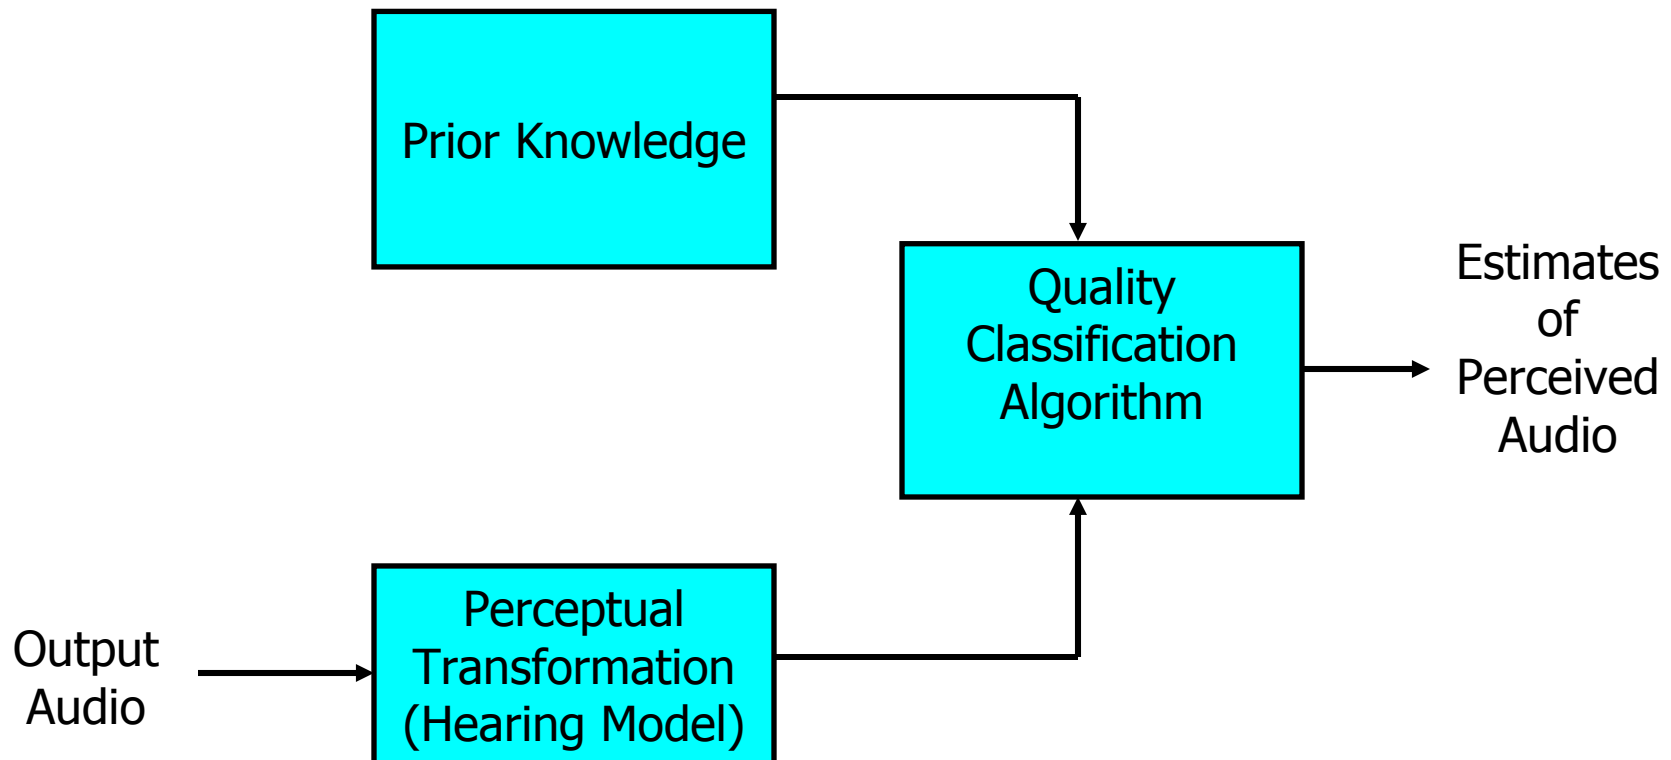

Perceptual Transformation (Hearing Model)

- Frequency resolution not uniform on Hz scale \Rightarrow
Use psychoacoustic frequency scale
(Bark or Critical Band Scale)
- Loudness growth \Rightarrow
Transform signal power to perceived loudness
- Sensitivity vs. frequency \Rightarrow
Apply equal loudness weightings
- Hearing thresholds \Rightarrow
Discard signals below threshold
- Frequency and time domain masking \Rightarrow
Simulate by spreading signals in frequency and time



ITS Results (4 KHz Speech)

Based on experiments involving objective-subjective comparisons

- Distance measure (judgment model) is *at least* as important as perceptual transformation (hearing model)
- Some perception-based objective assessments may over-emphasize perceptual transformations (hearing model) and under-emphasize distance measure (judgment model)
- Hearing properties for noise and tone have been well-established through decades of research
- Judgment is relatively open question
- ITS contribution to problem involves more insightful and effective distance measures.
 - Measure and remove spectral deviations at one time or frequency scale then proceed to the next scale
 - Work from larger to smaller scales, because this is most likely to emulate listeners' patterns of adaptation and reaction



Standardized Algorithms

- Telephone Band Speech (300-3400 Hz), one talker, limited background noise
 - Input/Output
 - ITU-T P.862 (PESQ)
 - ANSI T1.518 (MNB)
 - Output only
 - ITU-T P.563
 - ANSI T1.??? (almost finished) (ANIQUE+)
- Wideband Speech (50-7000 Hz), one talker, limited background noise (input/output)
 - P.862.2 (Wideband PESQ)
- Full Bandwidth Music (20-20,000 Hz), Small Distortions (input/output)
 - ITU-R BS.1387 (PEAQ)




How Well Do They Work?

- Use subjective test results as “truth data”
- Look at objective-subjective correlation
- Look at objective-subjective RMS error

Example Results r.e. 20 Subjective Tests

Objective-Subjective Correlations (per condition)


Telephone bandwidth (4 kHz) speech, single talker, limited background noise

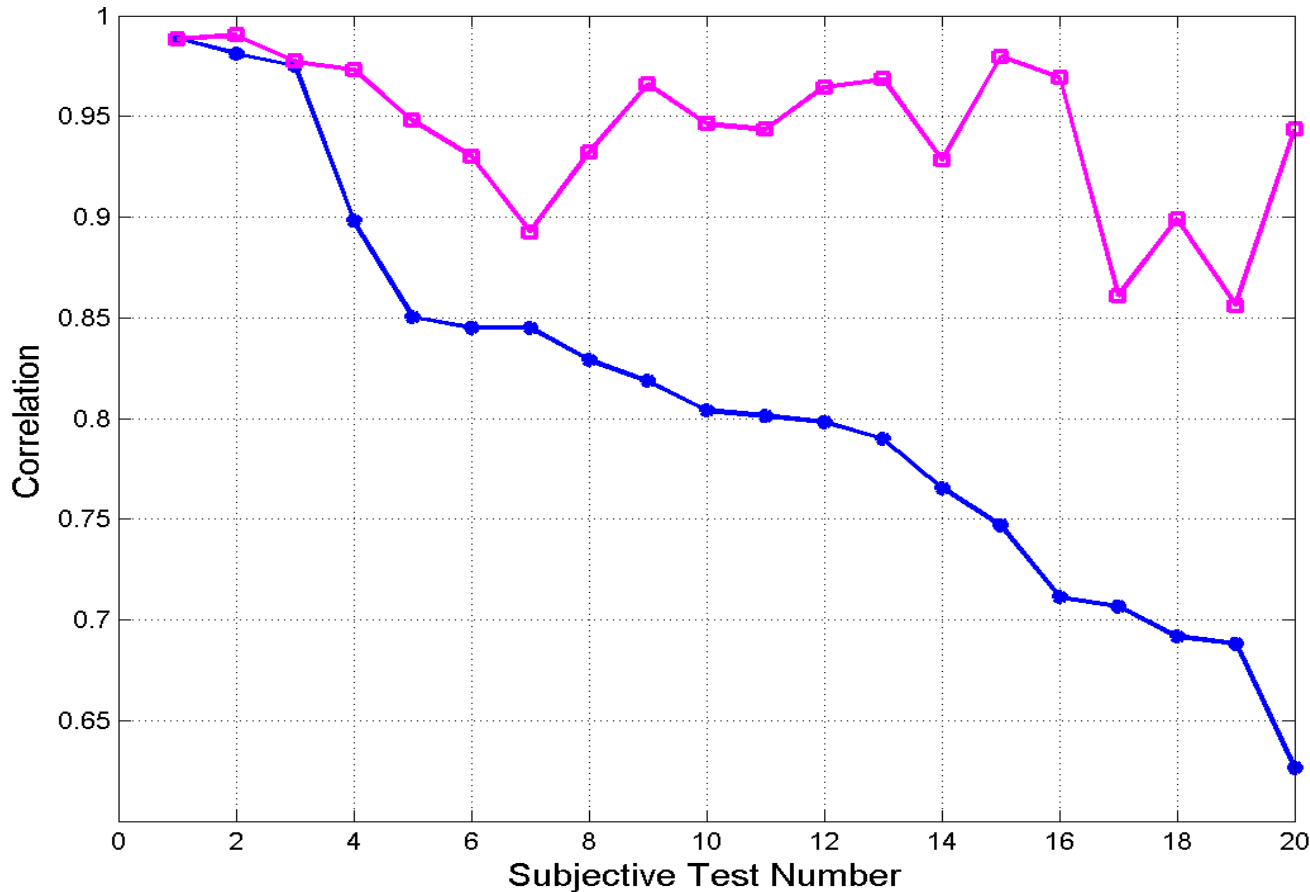

P.862
(Input/Output)

P.563
(Output Only)

Are We There Yet?

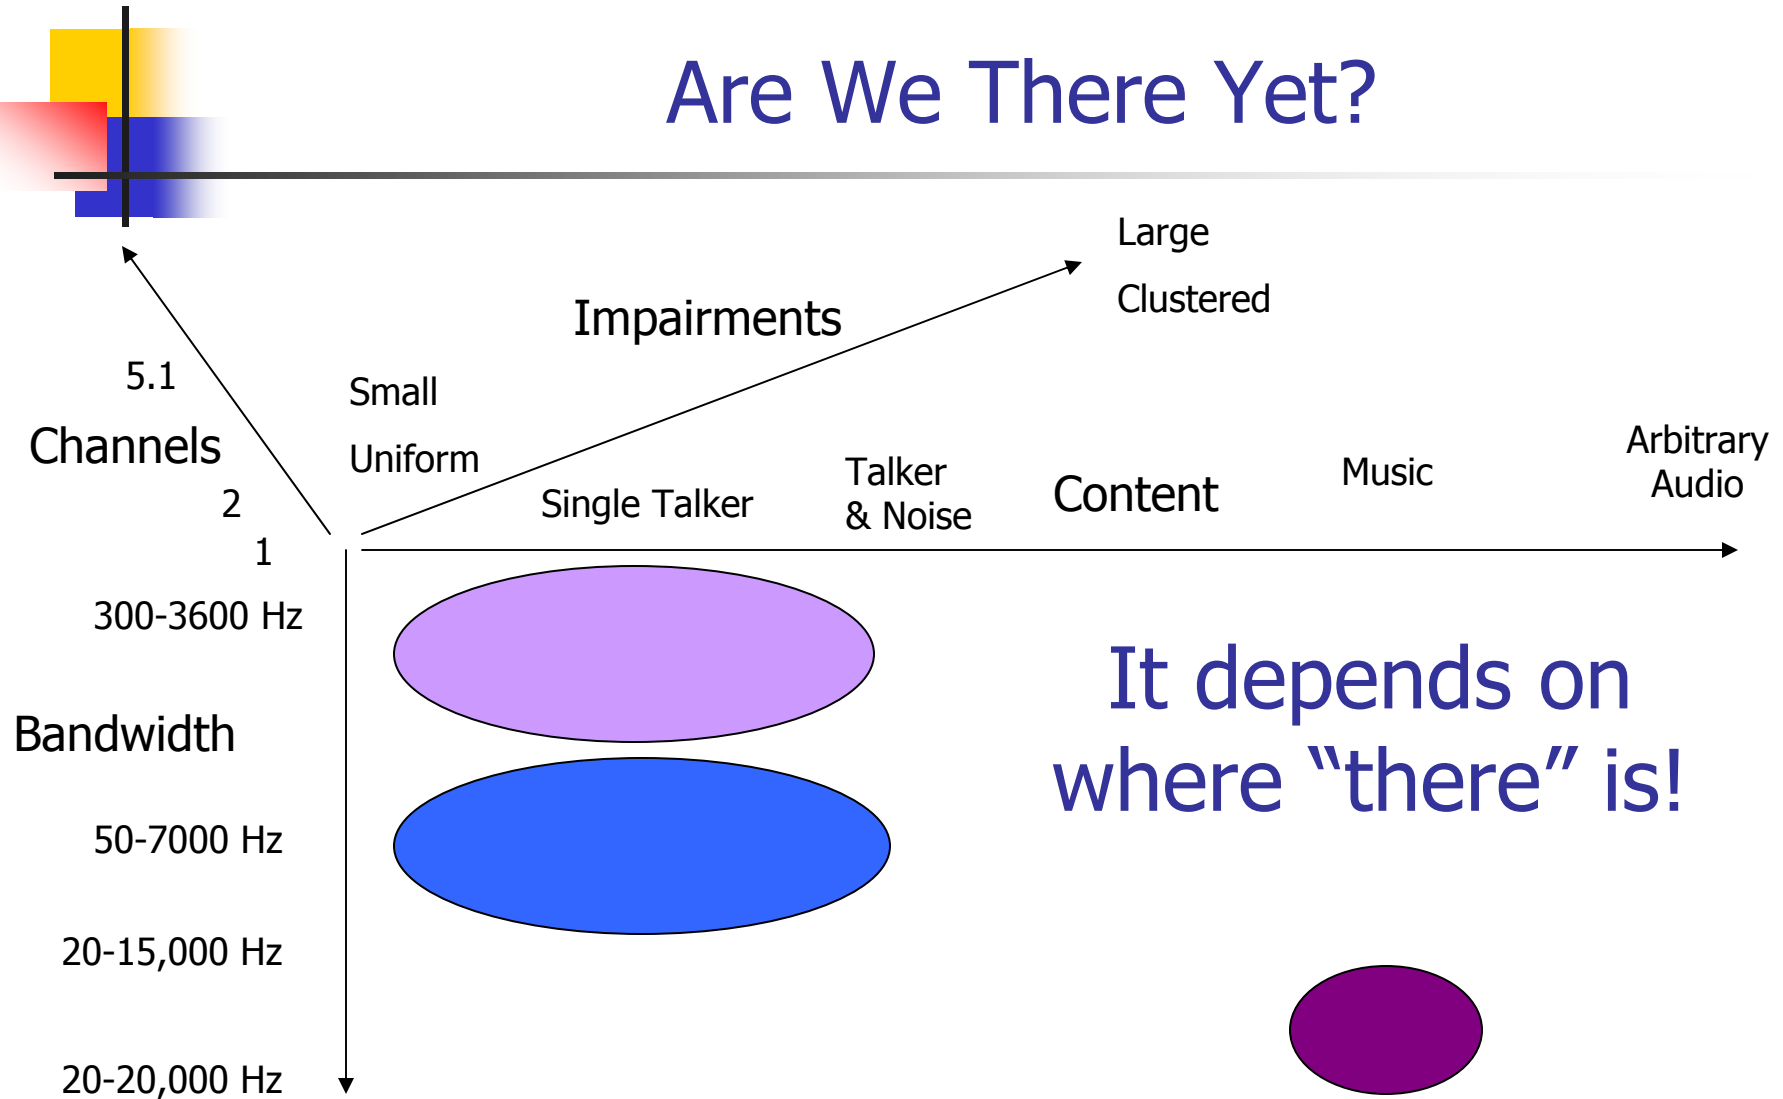



Moving Forward

- Reduced estimation error (esp. in output only algorithms)
- Increased applicability
 - Tandems of coders
 - Signal content (multiple speakers, speech + background noise, sound effects, music)
 - Signal bandwidth (7 kHz, 15 or 20 kHz)
- ITU-T SG12, Q9, P.OLQA
 - Wideband speech (50-7000 Hz)
 - Handsets & Handsfree
 - Music on hold
- ITU-R WP6Q, extend BS.1387
 - Add channels
 - Lower quality music coding

Objective Measurement of User-Perceived Video Quality

A decorative graphic on the left side of the slide. It consists of a vertical black line intersecting a horizontal black line. To the left of the intersection, there are three overlapping squares: a blue one at the top, a red one in the middle, and a yellow one at the bottom. The squares have a gradient effect, fading out to the right.

Stephen Wolf and Margaret Pinson

National Telecommunications and Information
Administration (NTIA)

Institute for Telecommunication Sciences (ITS)

Boulder, CO

A decorative graphic consisting of a vertical black line and a horizontal black line intersecting at the center. To the left of the intersection, there are three overlapping squares: a yellow one at the top, a red one in the middle, and a blue one at the bottom. The squares have a gradient effect, fading out towards the right.

Outline of Presentation

- New Measurements Required
- Subjective Video Performance
- Objective Video Performance
- Video Standardization Efforts
- Extensions of Technology
- Demonstration of Tools

Estimating the User Quality of Service (QoS) Experience

- Two Automated Methods
 - Indirect Method - Measure Network Performance => Relate to User Experience
 - Difficult to Map to User Experience
 - Map is Dependent on Coder/Decoder
 - Direct Method - Measure Data Received by User => Relate to User Experience
- This Presentation – Direct Method

A decorative graphic consisting of overlapping colored squares (yellow, red, blue) and a black crosshair.

Advantages of Direct Method

- Measurement System “Sees” Exactly What User Sees
 - Important Because User QoS is User-Data Dependent
 - Scene Complexities (e.g., Spatial, Temporal) Significantly Influence Quality



Advantages of Direct Method

- Measurement System Can Be Made Technology Independent
 - Coder/Decoder Design
 - e.g., Error Concealment in Decoder
 - Transmission Method
- To Be Accurate (i.e., Track Subjective), In-Service Measurements are Required


Three Direct Objective Methods (ITU-T Recommendation J.143)

- Full Reference (FR)
 - Full Access to Source Video
 - Accurate But Not Useful for In-Service
 - Scene and Technology Independent
- No Reference (NR)
 - No Access to Source Video
 - In-Service But Not Accurate
 - “Like Measuring Voltage without a Ground Wire”
 - Not Scene or Technology Independent

Three Direct Objective Methods (ITU-T Recommendation J.143)

- Reduced Reference (RR)
 - Uses Low Bandwidth Quality Features Extracted From Source and Destination Video Streams
 - In-Service Monitoring
 - Scene and Technology Independent
 - Accurate as FR, Degrades Gracefully as RR Bandwidth is Reduced

Reduced-Reference (RR) Measurement Paradigm

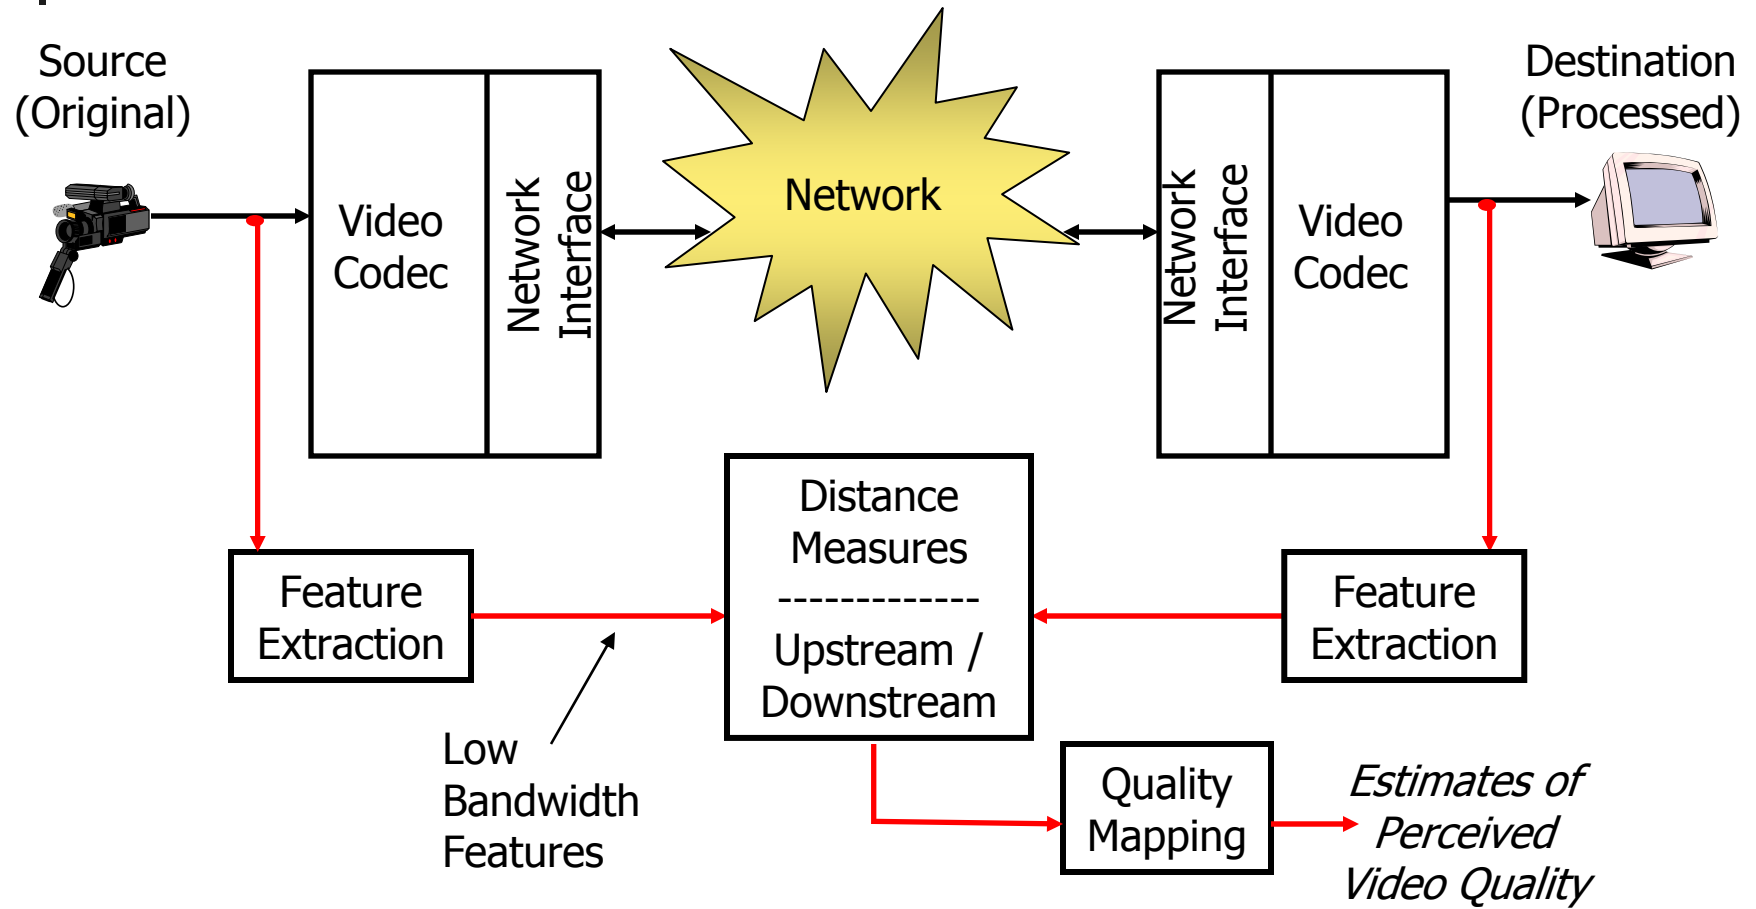

A decorative graphic consisting of a vertical black line and a horizontal black line intersecting at the origin. To the left of the intersection, there are three overlapping squares: a yellow one at the top, a red one in the middle, and a blue one at the bottom. The squares have a gradient effect, fading out towards the right.

Outline of Presentation

- New Measurements Required
- Subjective Video Performance
- Objective Video Performance
- Video Standardization Efforts
- Extensions of Technology
- Demonstration of Tools



Subjective Testing Methods

- Truth Data for Objective Methods
- Standardized Test Procedures
 - ITU-R BT.500 (TV)
 - ITU-T P.910 (Multimedia)
- Controlled Test Environments
 - Monitor Setup, Viewing Distance, Lighting, etc.
- Controlled Test Methods
 - Training
 - Subject and Material Selection, Presentation, Scales



Subjective Testing Methods

- Single Stimulus (SS) vs. Double Stimulus (DS)
 - Explicit or Hidden Reference for DS
 - DS More Robust (Context, Bias)
- Discrete vs. Continuous Assessment
- Randomization and Balance Over Test Variables is Very Important





Absolute Subjective Ratings

- For Practical Reasons, They Don't Exist!
 - Viewer Pool Variability, Criticality, Cultural Differences
 - Overall Range of Quality in Experiment
 - Application Dependencies
 - Laboratory Setup and Methodology
- Relative Ratings are Stable

Absolute Subjective Ratings

- Video Quality Expert's Group (VQEG)
 - Phase 1, *Identical* Experiment, 4 Labs
 - Significant Gain and Offset Issues

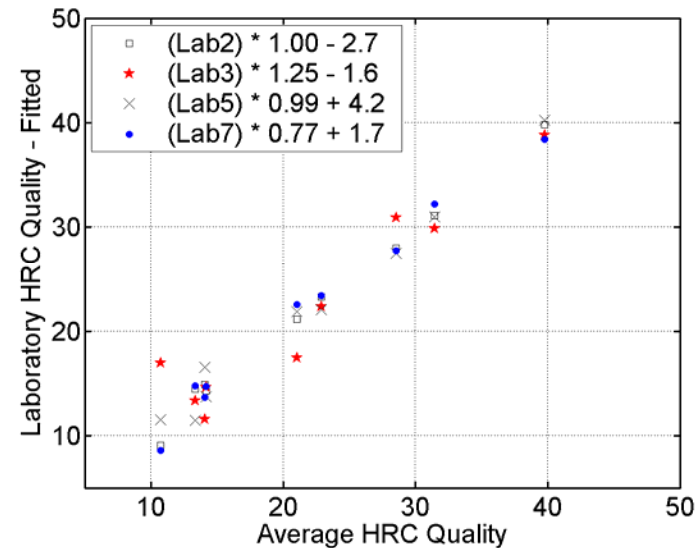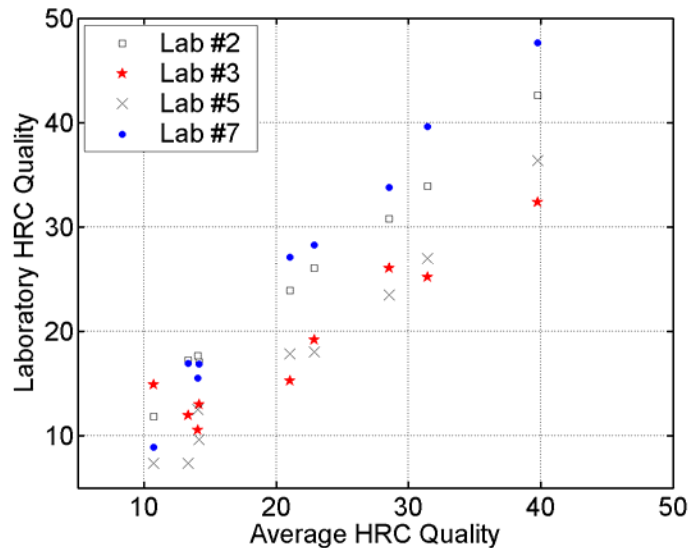

ITS-Developed Data Mapping

- Observations Led to the Development of Mathematical Data Mapping Method
- Iterative Nested Least Squares Algorithm (INLSA)
 - Linear Transformation of Subjective Data Sets
 - Simultaneous Minimization of Objective Estimation Error
- Produces Large Coherent Subjective Data Base
 - Better Video Quality Models (VQMs)



Recent Papers on INLSA and Subjective Video Testing Issues

- July, 2003, "An Objective Method for Combining Multiple Subjective Data Sets," SPIE Video Communications and Image Processing Conference, Lugano, Switzerland.
- July, 2003, "Comparing Subjective Video Quality Testing Methodologies," SPIE Video Communications and Image Processing Conference, Lugano, Switzerland.
- "spie03obj.pdf" and "spie03subj.pdf"
 - <http://www.its.bldrdoc.gov/n3/video/documents.htm>

ITS Subjective Test Facilities



- Two Sound Isolated Rooms
 - Interactive Tests
 - Configurable (A, V, A/V)
- Fully Automated
 - A/V Playback
 - Subjective Scores



ITS Subjective Test Facilities



Uncompressed HDTV
Equipment



HDTV Viewing Room

ITS's Extensive Subjective Data Sets

- 19 SD Data Sets (2651 Video Clips) + 1 HD Data Set
- 392 SD Scenes
 - Wide Range of Spatial Detail, Motion, Contrast, Brightness, Color
- 272 SD HRCs (Video Systems)
 - Wide Range of Bit Rates, Coders, Transmission Channels, including Analog
- National Archive



Outline of Presentation

- New Measurements Required
- Subjective Video Performance
- Objective Video Performance
- Video Standardization Efforts
- Extensions of Technology
- Demonstration of Tools

Objective Video Quality-Estimation Components

- Step 0: Calibration
 - Remove Perceptually-Irrelevant Systematic Errors from Destination Signal
 - Report Separately From Perception-Based Quality
- Step 1: Feature Extraction
 - Extract Perceptually-Relevant, Quality-Related Attributes from Source and Destination Signals
 - $.00001 < (\text{Feature Bit-Rate}/\text{Signal Bit-Rate}) < 1$
 - "Reduced Reference" In-Service Measurements
- Step 2: Distance Measures
 - Calculate a Perceptually-Relevant Distance Between the Source and Destination Feature Streams
- Step 3: Quality Mapping
 - Relate Perceptual Distances to Estimates of Perceived Quality

Objective Video Quality- Estimation Components

- Most Step 0 to 3 Algorithms
 - Documented in NTIA Report 02-392, "Video Quality Measurement Techniques"
 - "vqm_techniques_v2.pdf" available at:
<http://www.its.blrdoc.gov/n3/video/documents.htm>
 - Sept, 2004, "A New Standardized Method for Objectively Measuring Video Quality," *IEEE Transactions on Broadcasting*, v. 50, n. 3, pp. 312-322.
 - "ieee04.pdf" also available at:
<http://www.its.blrdoc.gov/n3/video/documents.htm>
- Additional Documentation Will Be Presented When Covered



Step 0: Calibration

- Estimate and Remove (Order is Important)
 - Temporal Shifts (Video Delay)
 - Spatial Scaling (Horizontal and Vertical)
 - Spatial Shifts (Horizontal and Vertical)
 - Valid Region Reduction
 - Gain and Level Offset
- Importance Depends Upon Objective Measurement Technique
 - PSNR is Highly Sensitive
 - RR Measurements are Much Less Sensitive



Step 0: Calibration


- Most Calibration Quantities are Fixed for a Given Hypothetical Reference Circuit (HRC) – i.e., system under test.
 - Except Temporal Registration
- Need Only Estimate Once or Infrequently at System Setup
- Spatial Scaling and Spatial Registration are CPU and Bandwidth Intensive

Temporal Registration – Two Methods

- Frame Based
 - Slow, High RR Bandwidth, Sensitive to Calibration
 - Laboratory, Bench-Top, Out-of-Service
 - Produces Delay Estimate for Each Frame
- Sequence Based
 - Fast, Low RR Bandwidth, In-Sensitive to Calibration
 - In-Service
 - Produces Delay Estimate for Each Sequence
 - Works Well with RR Quality Measurements



Sequence Based Temporal Registration

- Uses Motion, Luma (Y') Features

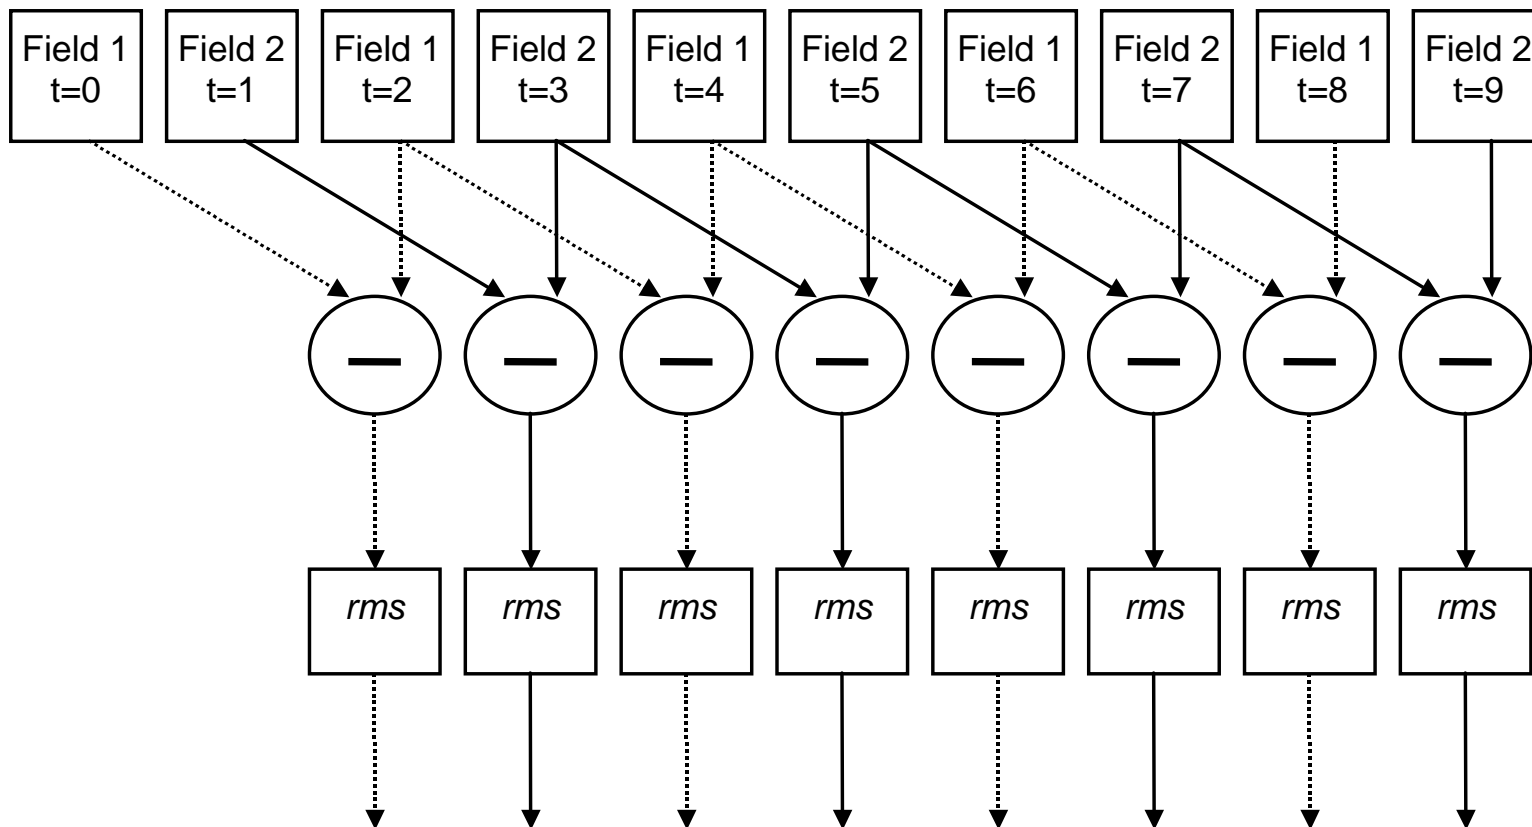

Sequence Based Temporal Registration

- Correlation to Align Source (Blue) and Destination (Red) Feature Streams

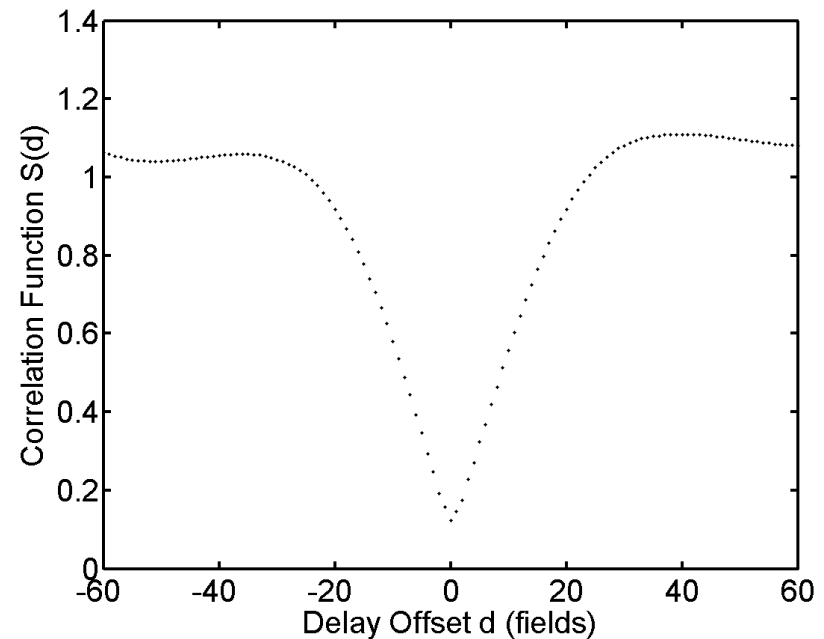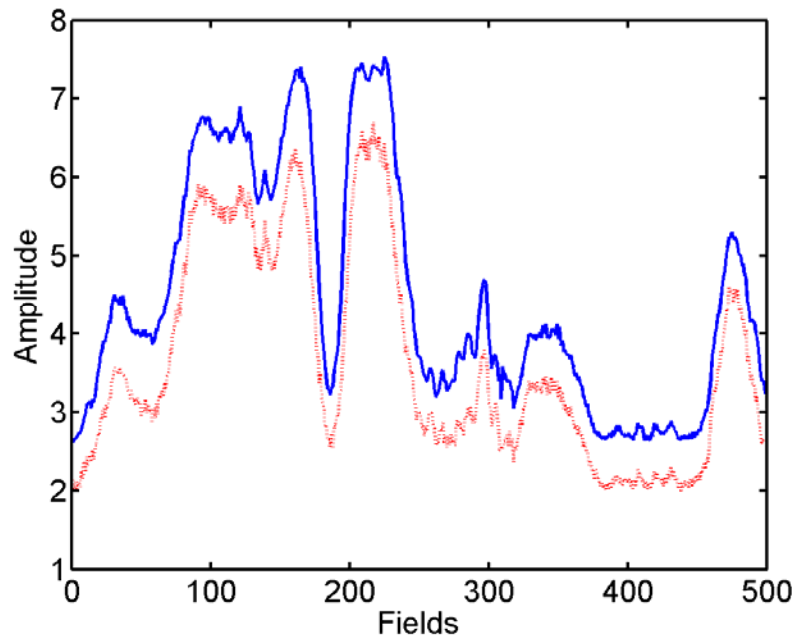



Spatial Scaling Estimation

- More Applicable to Multimedia than TV
 - Has Been Observed For TV (Rare)
- Uses H and V Image Profiles
 - Average of Image Columns (H), Rows (V)
 - Reduces Scaling Estimation Complexity
- Use Smart Search to Find Optimal Stretch or Shrinkage
- Use Several Scenes & Filter Results

Spatial Registration Estimation

- Special Test Signals Can Be Useful for Out-of-Service Measurements






Spatial Registration Estimation

- In-Service Methods Must Utilize Real Video Scenes
- Multi-Dimensional Search (Expensive)
 - Utilize Temporal Registration Results
 - Random Sampling of Pixels (e.g., 0.2%)
 - Sub-Sample Temporally (e.g., every $\frac{1}{2}$ sec)
- Use Several Scenes & Filter Results

Spatial Registration Estimation

- Spatial Registration Uses Field Processing
 - Some Video Systems "Re-Frame"

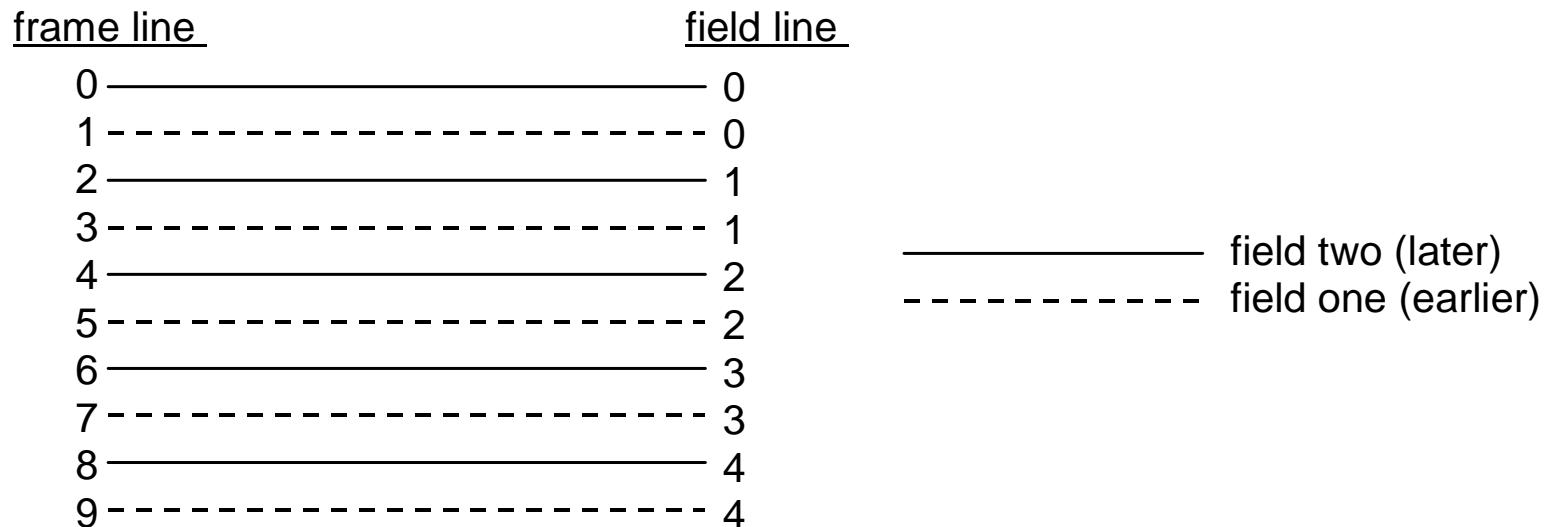

Spatial Scaling and Registration Estimation

- NTIA Technical Report TR-06-433, "Reduced Reference Video Calibration Algorithms"
- "ntia_tr_06_433.pdf" available at:
 - <http://www.its.blrdoc.gov/n3/video/documents.htm>



Valid Region Reduction

- Video Systems Often Reduce Picture Area
 - Mechanism to Save Bits
- Use Mean Value of Columns & Rows
 - Transitions (Ramps) Not Included
- Referenced to Source, Accounting for Spatial Scaling and Shifts

Gain and Level Offset – Independent Color Components

- Temporally & Spatially Scaled & Registered
- Treat Each Component (e.g., Y', Cb, Cr) Separately
- Divide Valid Region into N Sub-Regions
 - Take Mean of Each Sub-Region
 - Solve Least Squares Problem

$$\underline{D} = g \underline{S} + l$$


Gain and Level Offset – Dependent Color Components

- Required for Complex Color Errors (e.g., Hue)
- Estimate and Remove Arbitrary Color Component Mixing Plus DC Shift
 - Must Solve for 12 Unknowns
 - e.g., For RGB Color Space, Red Color Component of 1st Corrected Sample is


$$\hat{S}_{-R_1} = A_{1,1} + A_{2,1} * D_{-R_1} + A_{3,1} * D_{-G_1} + A_{4,1} * D_{-B_1}$$

Gain and Level Offset – Dependent Color Components


Impaired

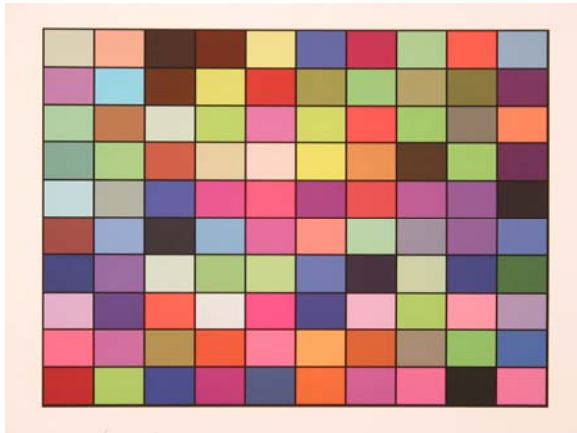

Original

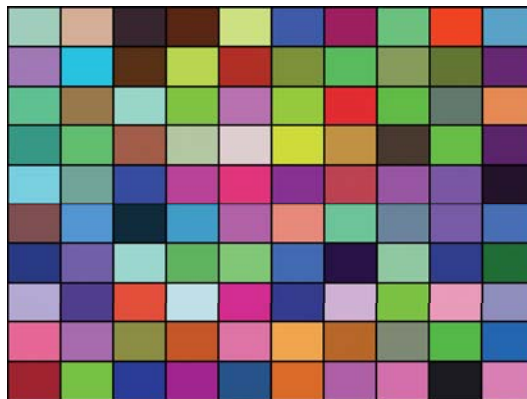

Corrected

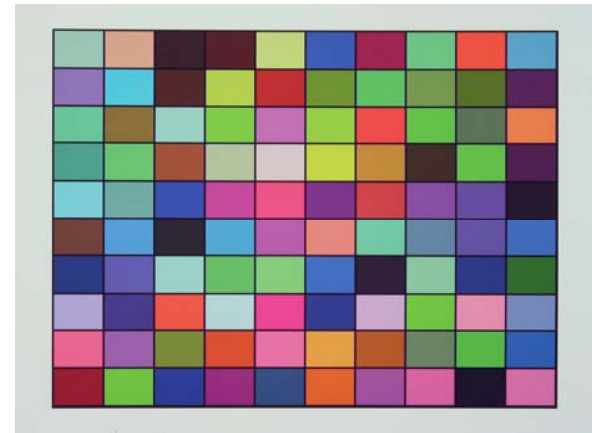

Gain and Level Offset – Dependent Color Components


- NTIA TM-04-406, “Color Correction Matrix for Digital Still and Video Imaging Systems”
- “ntia406.pdf” available at:
 - <http://www.its.bldrdoc.gov/n3/video/documents.htm>
- Excellent Practical Video Color Space Reference “ColorFAQ.pdf” available at:
 - <http://www.poynton.com/PDFs/ColorFAQ.pdf>



Step 1: Feature Extraction

- ITU-R Rec. BT.601 Sampling
 - 4:2:2, 13.5 MHz
 - Color-Difference (Cb, Cr) Half Bandwidth
 - Gamma Pre-Corrected (Approximates HVS)
- Luma (Y') Features Characterize
 - Spatial Gradients (Edges, Angles)
- Color-Difference (Cb, Cr) Feature
 - Treated as Two-Dimensional Vector
- Temporal Gradients (Motion) of Y', Cb, Cr

Overview of Spatial Gradient Feature Extraction


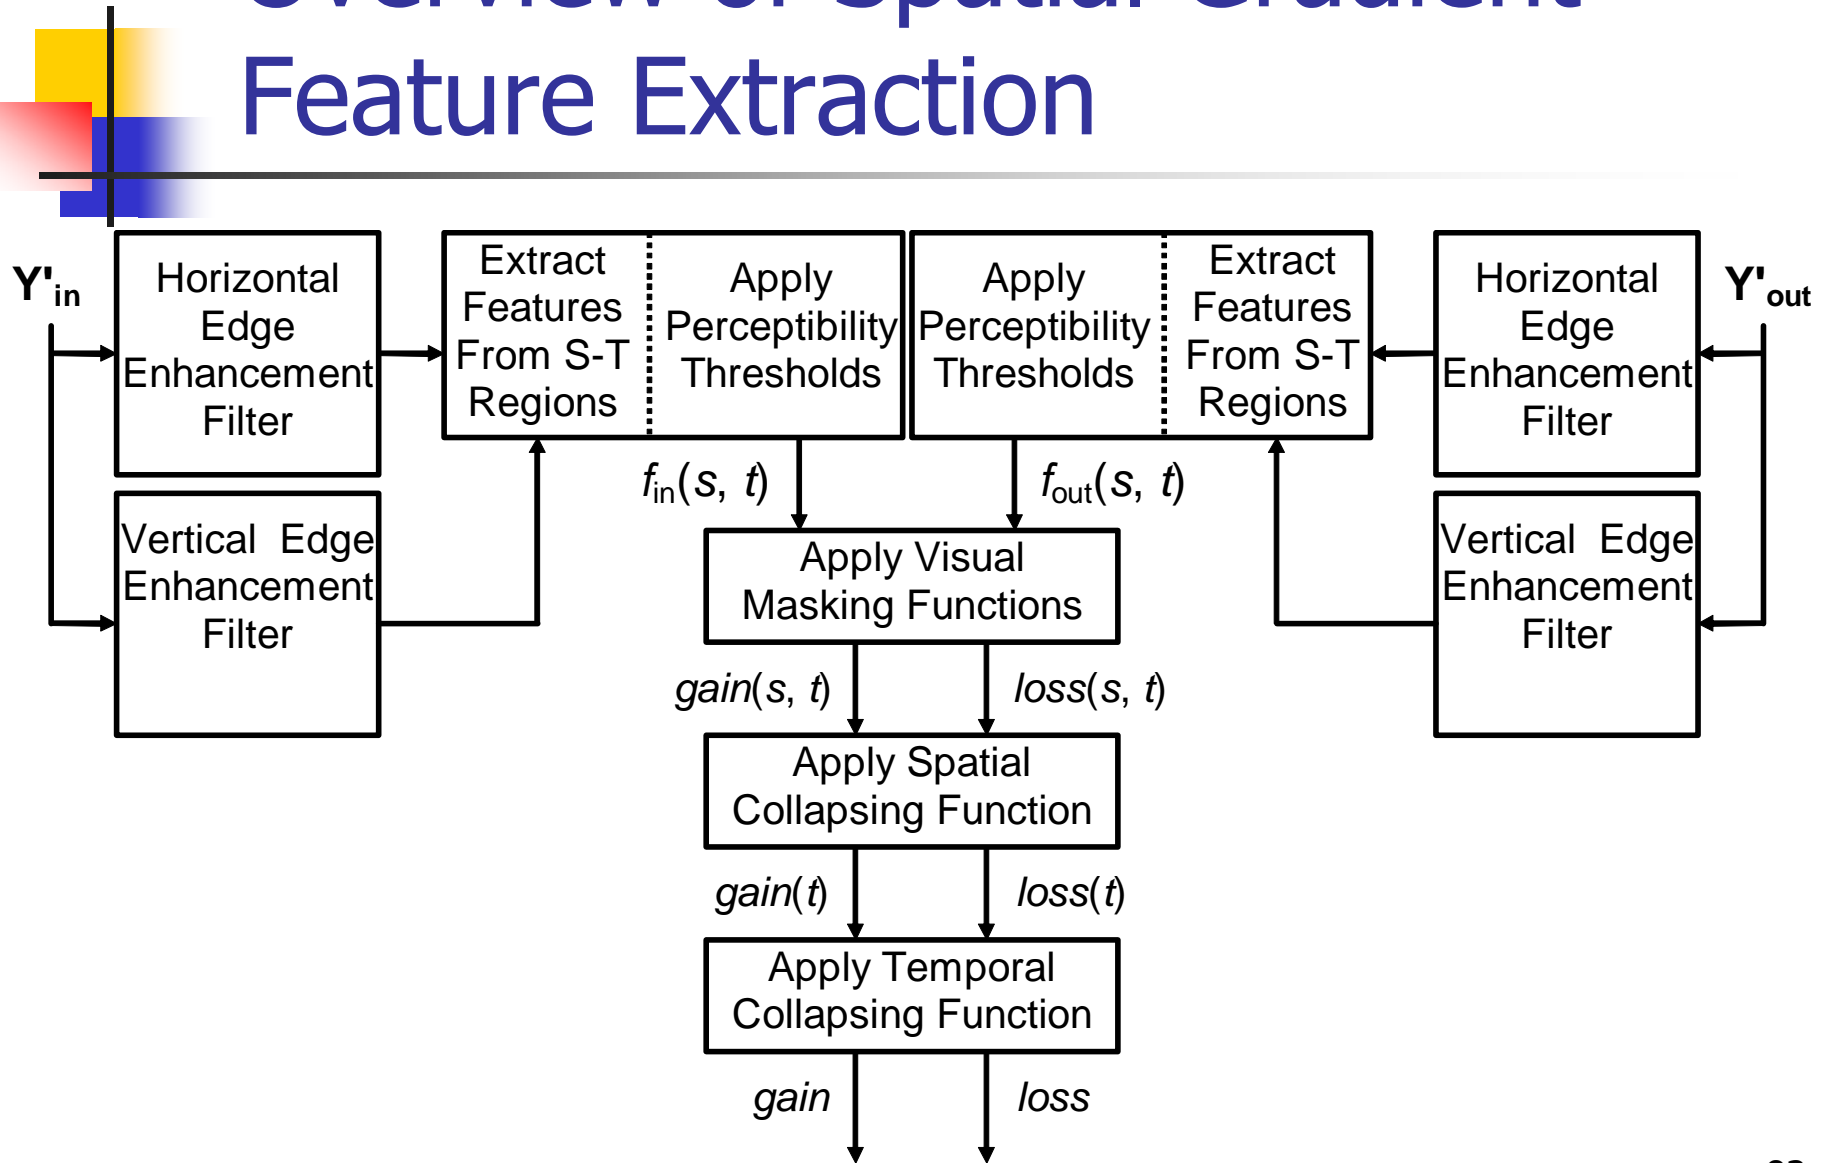


Spatial Gradient Filters

- Edge Enhancement Filters (C = 2)
- Lowpass / Bandpass

$$w_x = k * \left(\frac{x}{c}\right) * \exp\left\{-\left(\frac{1}{2}\right)\left(\frac{x}{c}\right)^2\right\}$$


Bandpass Filter Weights

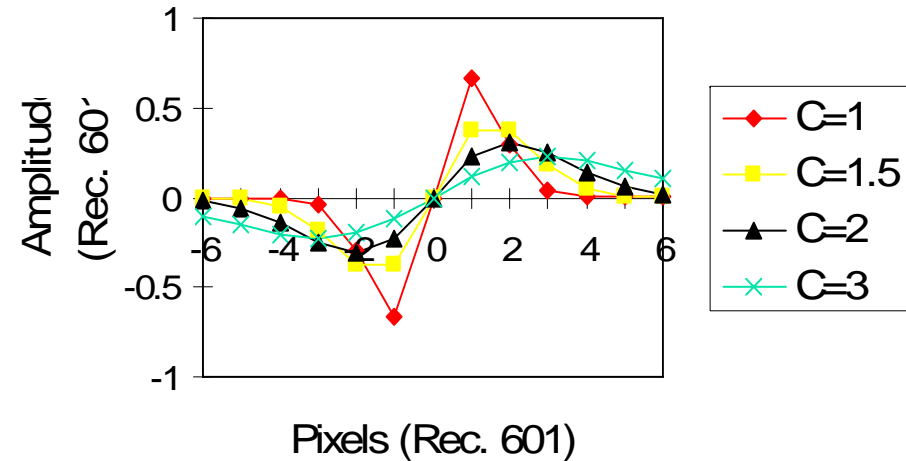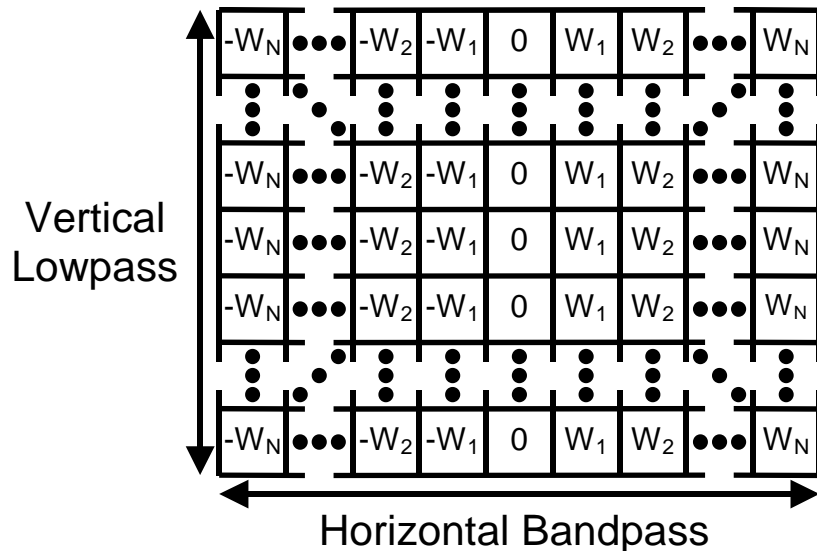

Two Spatial Gradient Features

- SI13
 - Spatial Gradient Magnitude
 - Blurring
- HV13
 - Spatial Gradient Angular Distribution
 - Blocking/Tiling

Graphical Depiction of Spatial Gradient Features

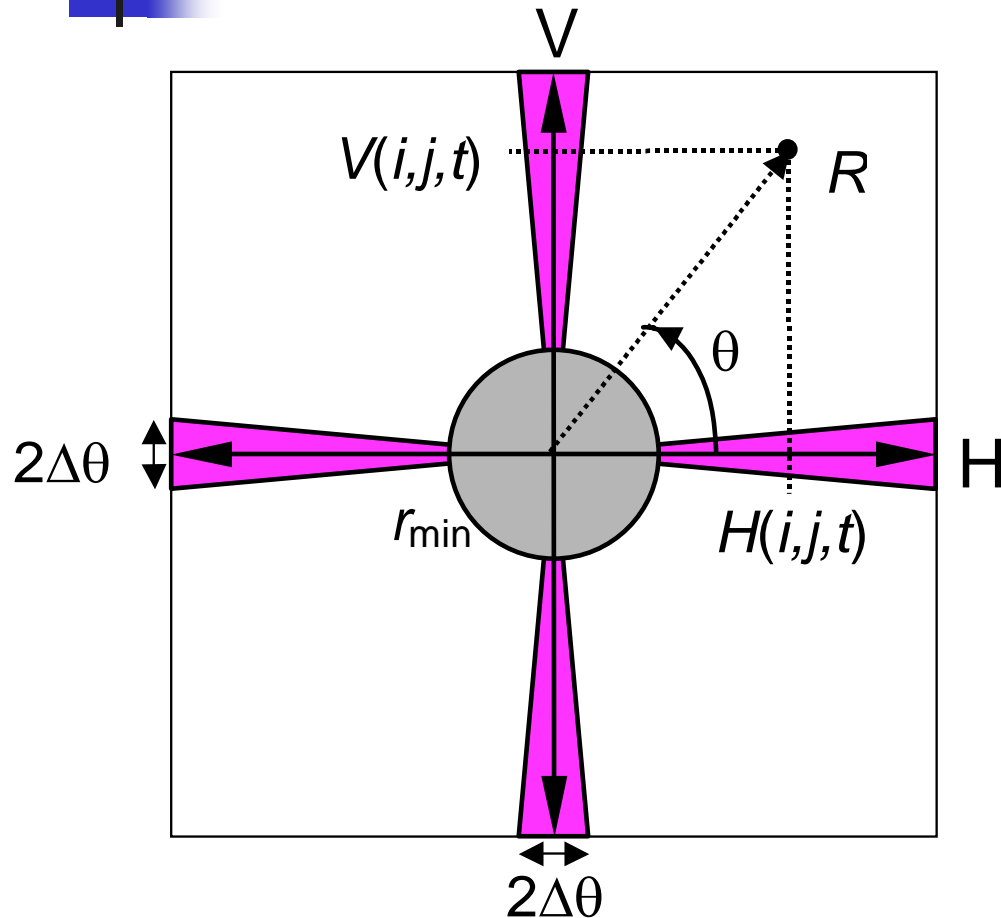

- SI13 $\left\{ \text{stdev} [R(i, j, t)] \right\} | P$



- HV13 $\frac{\left\{ \text{mean} [R_{HV}(i, j, t)] \right\} | P}{\left\{ \text{mean} [R_{\overline{HV}}(i, j, t)] \right\} | P}$

Spatial Gradient Feature Examples

- Missing Edges - Blurring, Smearing
- Added Edges - Tiling, Edge Busyness, Lines




Spatial
Filter

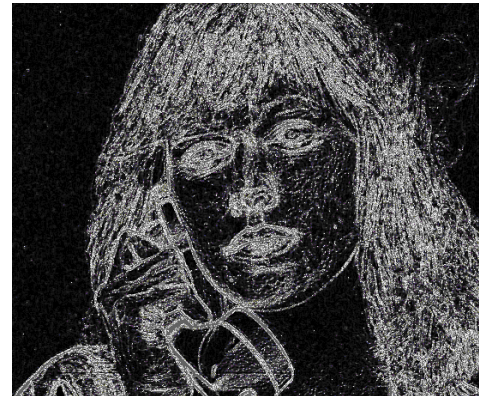


Spatial
Information (SI)

Blurring



Spatial

 Filter




Spatial

 Filter






Tiling / Blocking



Spatial

 Filter



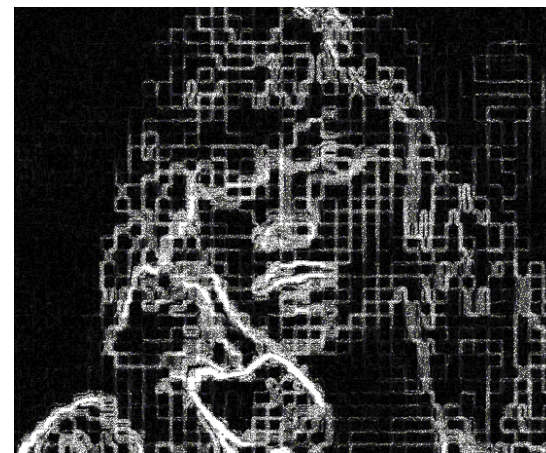Spatial

 Filter



Temporal Gradient Features

- Absolute Value of Frame Differences
- Missing Motion - Frame Freezes, Dropped Frames
- Added Motion - Error Blocks, Noise

Frame n



Frame n-1





Absolute Temporal
Information (ATI)



Frame Freezes, Dropped Frames



Absolute
Temporal
Information
(ATI)

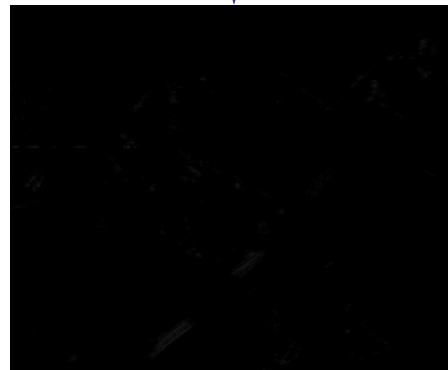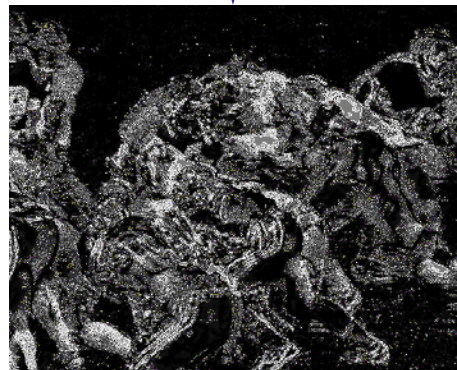

Error Blocks

Frame n



Frame n-1




Absolute
Temporal
Information
(ATI)



Temporal Feature Lowbw (10 kbits/s) VQM

- For Noise & Errors


- $ATI = \text{RMS} \{ Y'C_b C_r(t) - Y'C_b C_r(t-0.2s) \}$

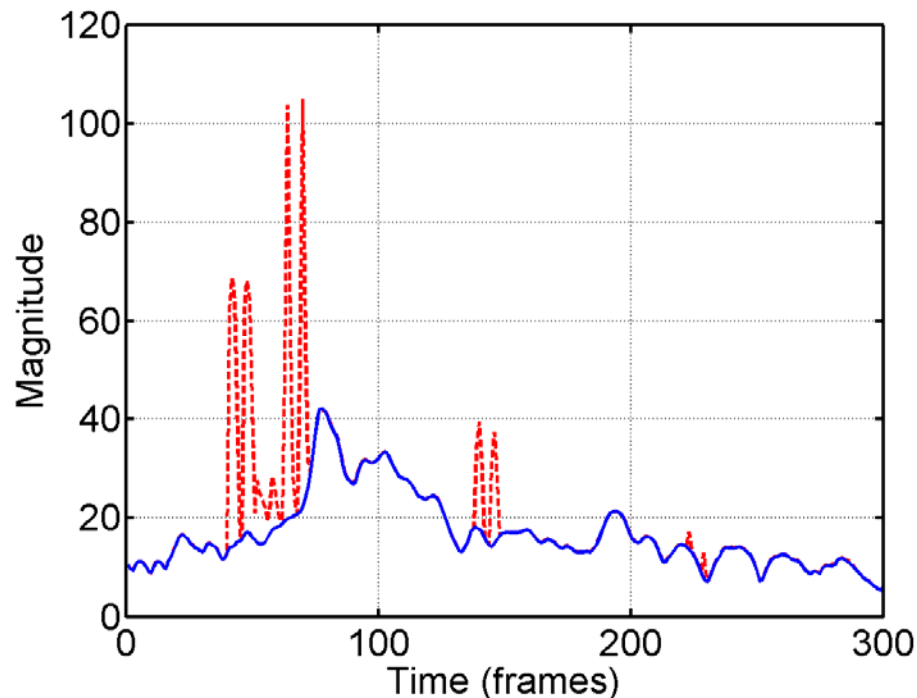

0.2s Makes Feature
Insensitive to Frame
Repeats Present in
Low Frame Rate
Multimedia Systems

Feature Extraction From S-T Regions

- Summary Statistics Extracted from S-T Regions After Perceptual Filtering (e.g., Mean, Stdev)

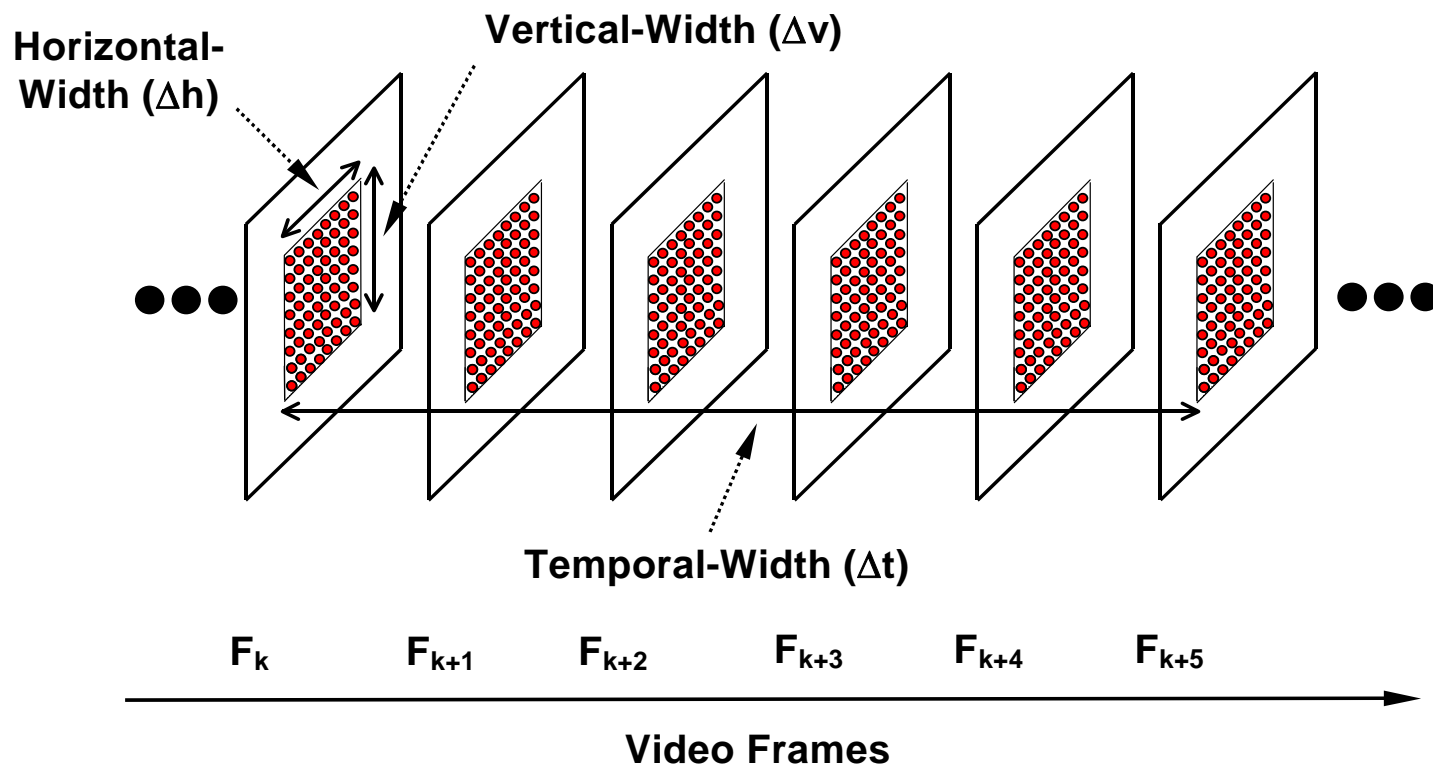


Objective to Subjective Correlation: S-T Region Size

- Optimal S-T Region Size
 - 8 x 8 x 0.2 Seconds (Used in General VQM)
 - Shorter Temporal Extents => Poorer Correlation
- Correlation Falls Off Slowly For Increasing Temporal Extents
 - 32 x 32 x 1 Second - Lowbw (10kbits/s) VQM

Objective to Subjective Correlation: S-T Region Size

- HV Loss (General VQM Error Pooling)

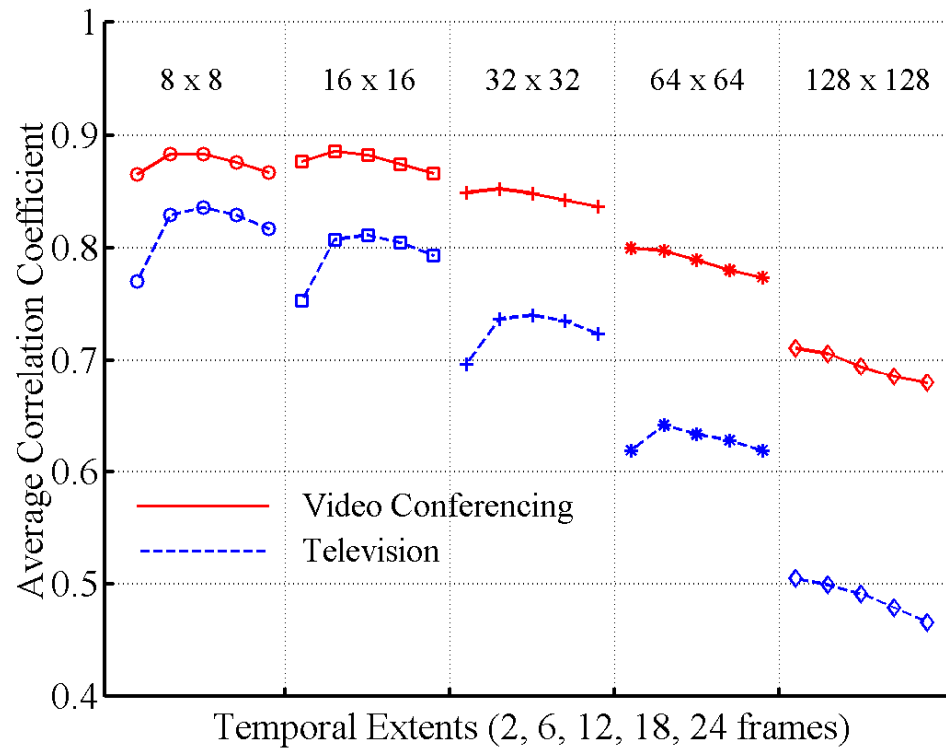


Objective to Subjective Correlation: S-T Region Size

- SCI / ISAS 2001 paper, "The Relationship Between Performance and Spatial-Temporal Region Size for Reduced-Reference, In-Service Video Quality Monitoring Systems"
- "iis01.pdf" available at:
 - <http://www.its.bldrdoc.gov/n3/video/documents.htm>

Feature Quantization

- Logarithmic Quantizers Minimize Errors in Distance Measures – 9 bits is Sufficient

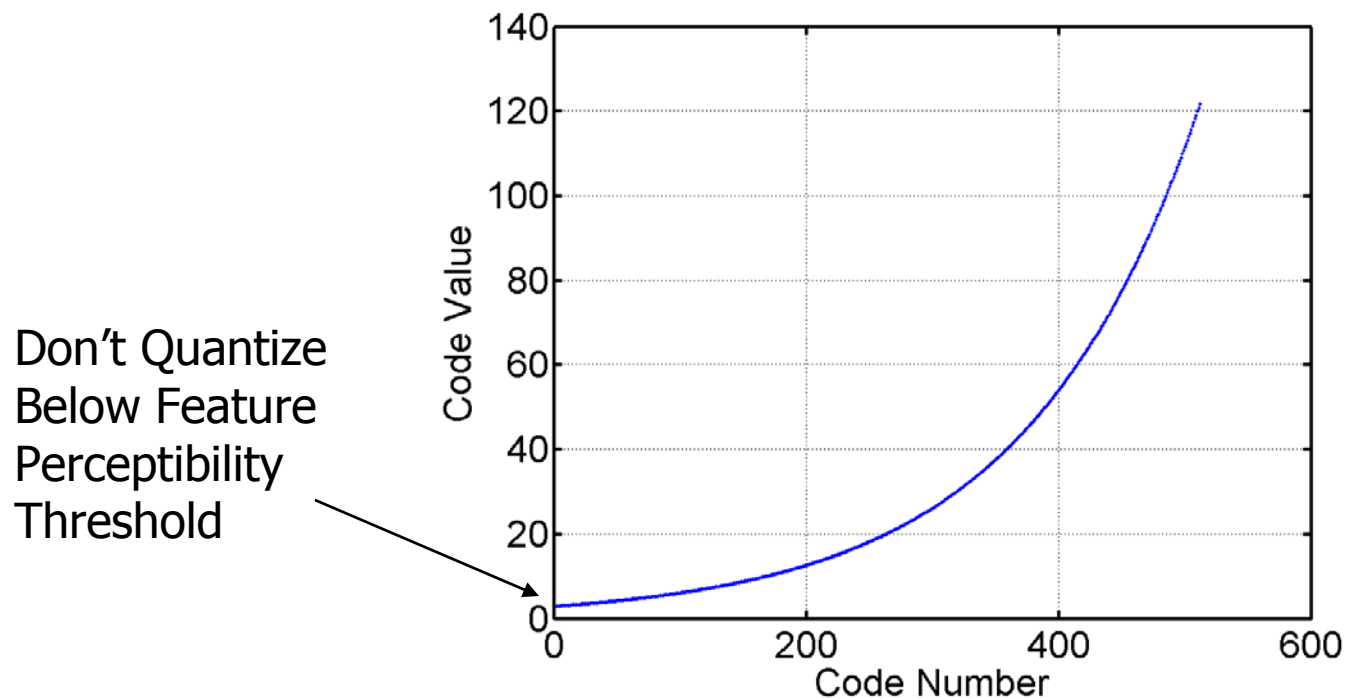

Step 2: Distance Measures - Quality Parameters

- Convert Feature Streams To Quality Parameters
- Measure Perceptual Impairments For Each S-T Region
- Apply Perceptibility Threshold
 - Clip Features at Low End

Step 2: Distance Measures - Quality Parameters

- Apply Visual Masking Functions
 - $(\text{Out-In})/\text{In}$, $\log (\text{Out}/\text{In})$
 - Separate Gain and Loss (i.e., Positive Part, Negative Part)
- Error Pooling (Over Space and Time)
 - Normally Worst Case (e.g., 5%)
 - Depends on Feature and S-T Region Size

Improved Error Pooling

Lowbw (10 kbits/s) VQM

- Macroblocks (MB) (e.g., 3r x 3c x 2t)
 - Worse Case Processing Within MB
 - Localized S-T Impairments
- Generalized Minkowski
 - Removes Non-Linearity Before Fitting

- $$Minkowski(P, R) = R \sqrt{\frac{1}{N} \sum_{i=1}^N |v_i|^P}$$

Step 3: Video Quality Mapping or Model (VQM)

- Depends on Subjective Testing Methodology
 - e.g., DSCQS, SSCQE (See ITU-R Rec. 500)
 - Expert/Non-Expert Viewers
- Depends on Video Application
 - Television
 - Videoconferencing





INLSA-Based VQMs

- ITS General VQM
 - 11 Subjective Data Sets (1563 Video Clips)
 - 7 Quality Parameters
- Lowbw (10 kbits/s) VQM
 - 19 Subjective Data Sets (2651 Video Clips)
 - 8 Quality Parameters
 - “vpqm05.pdf” available at:
 - <http://www.its.bldrdoc.gov/n3/video/documents.htm>



General VQM Performance – Training Data

- Clip Performance (Scene x System)
 - ITS General VQM vs. PSNR VQM

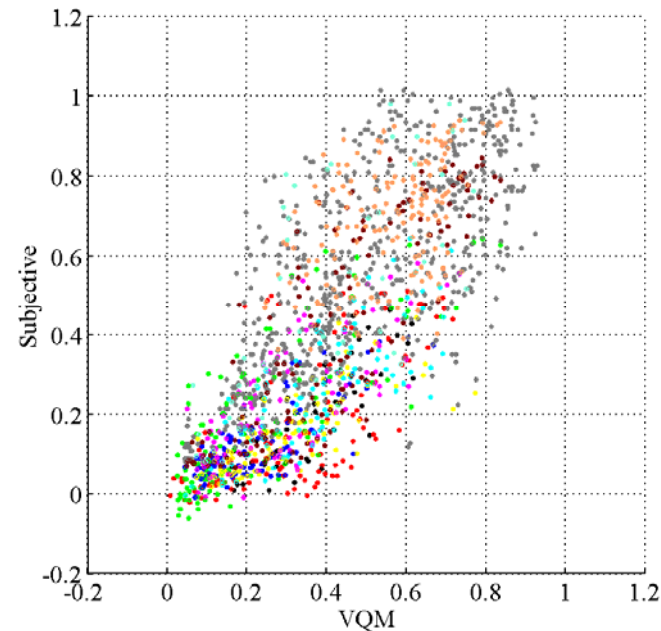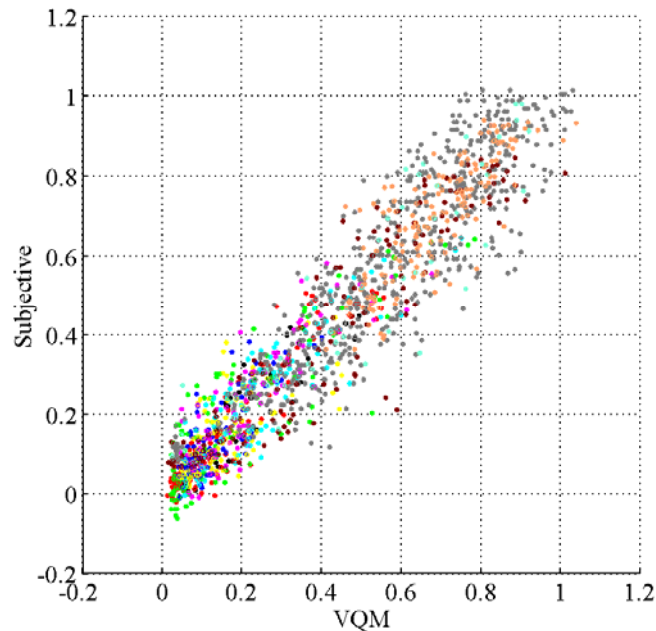


General VQM Performance - Training Data

- Average Video System (HRC) Performance
 - ITS General Model vs. PSNR

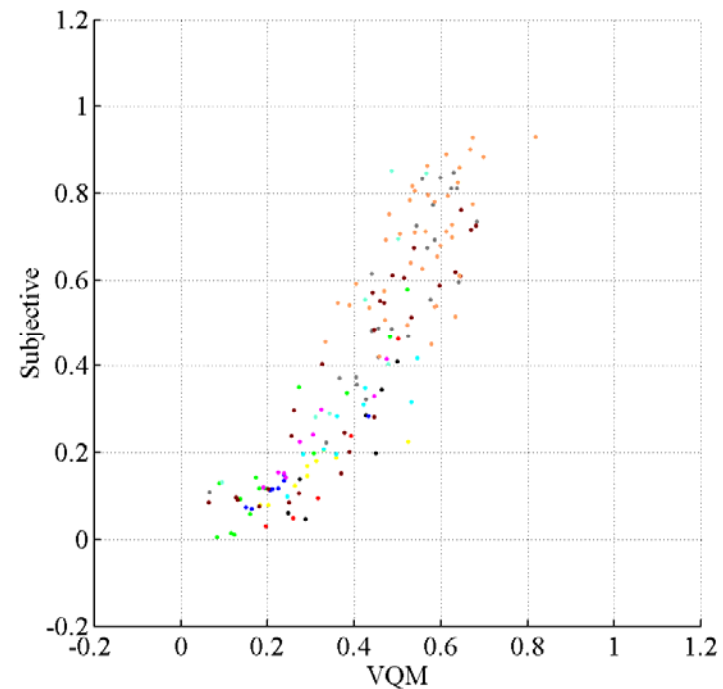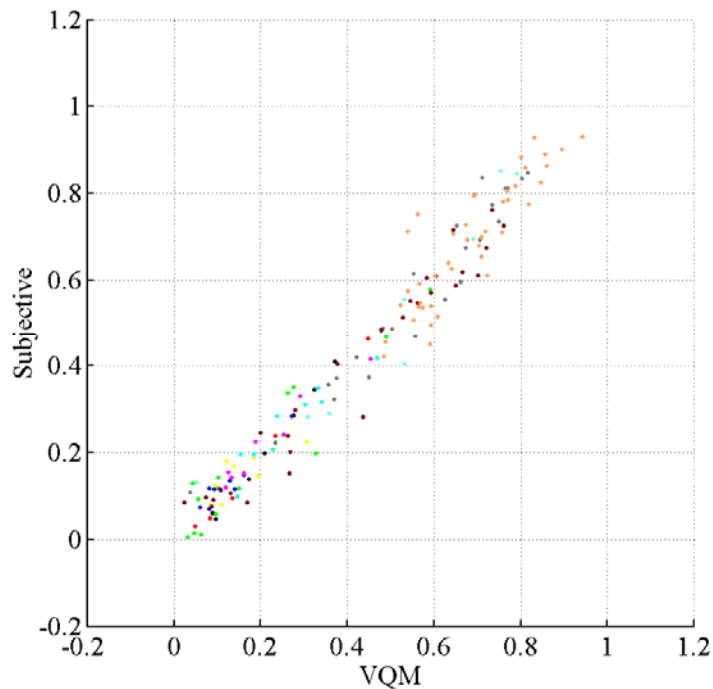


Lowbw (10 kbits/s) VQM Performance - Training Data

- Clip Performance
- $\rho = .927$
- RMS Error
 - 0.096
 - (0, 1) Scale

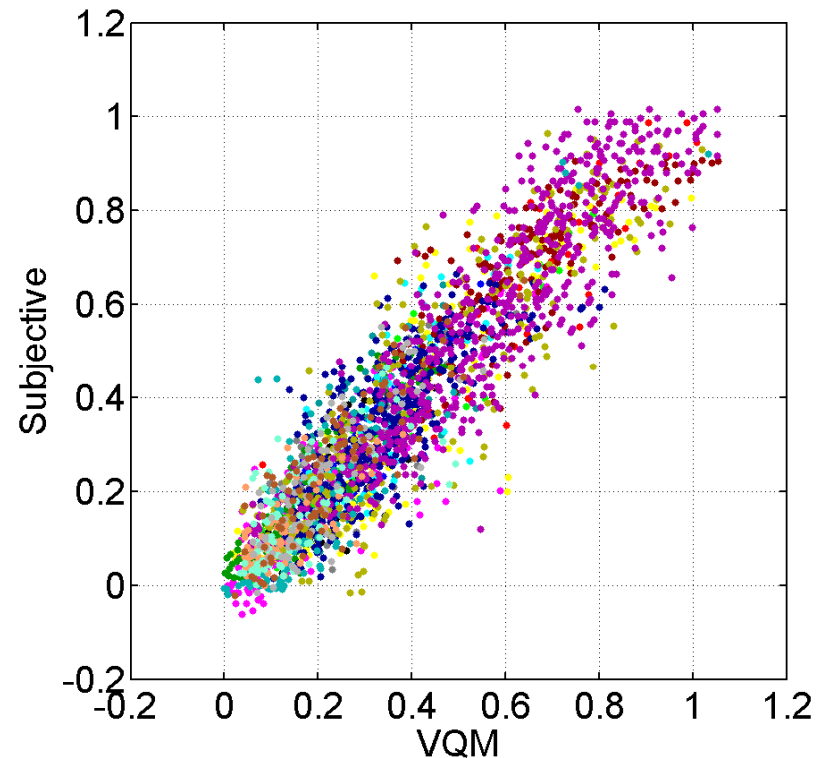


Lowbw (10 kbits/s) VQM Performance – Training Data

- HRC Performance
- $\rho = .967$
- RMS Error
 - 0.066
 - (0, 1) Scale

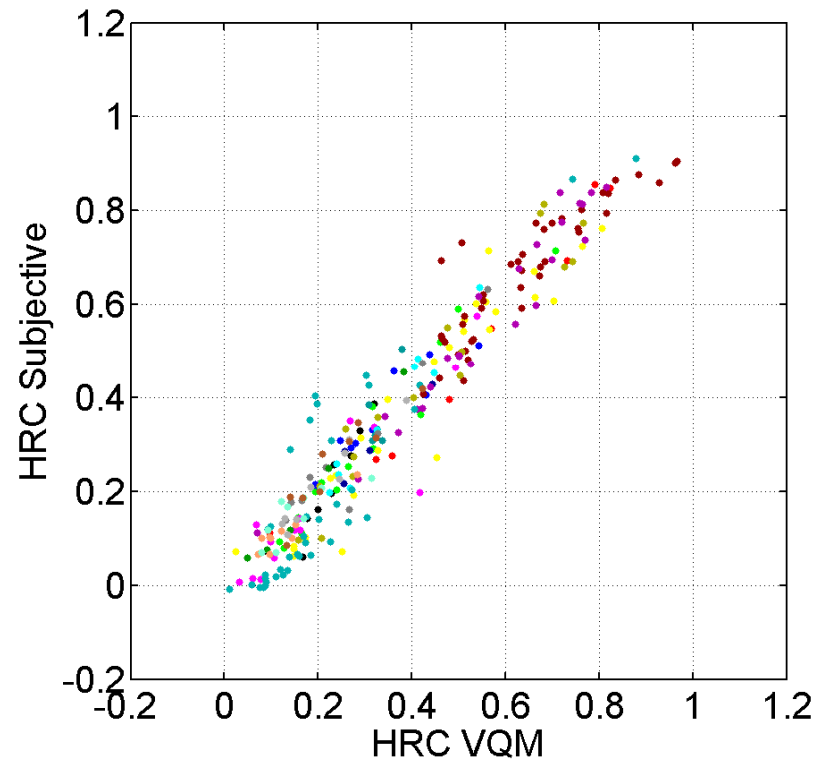

Continuous VQM Performance 10 kbits/s Prototype

- Single Stimulus Continuous Quality Evaluation (SSCQE)

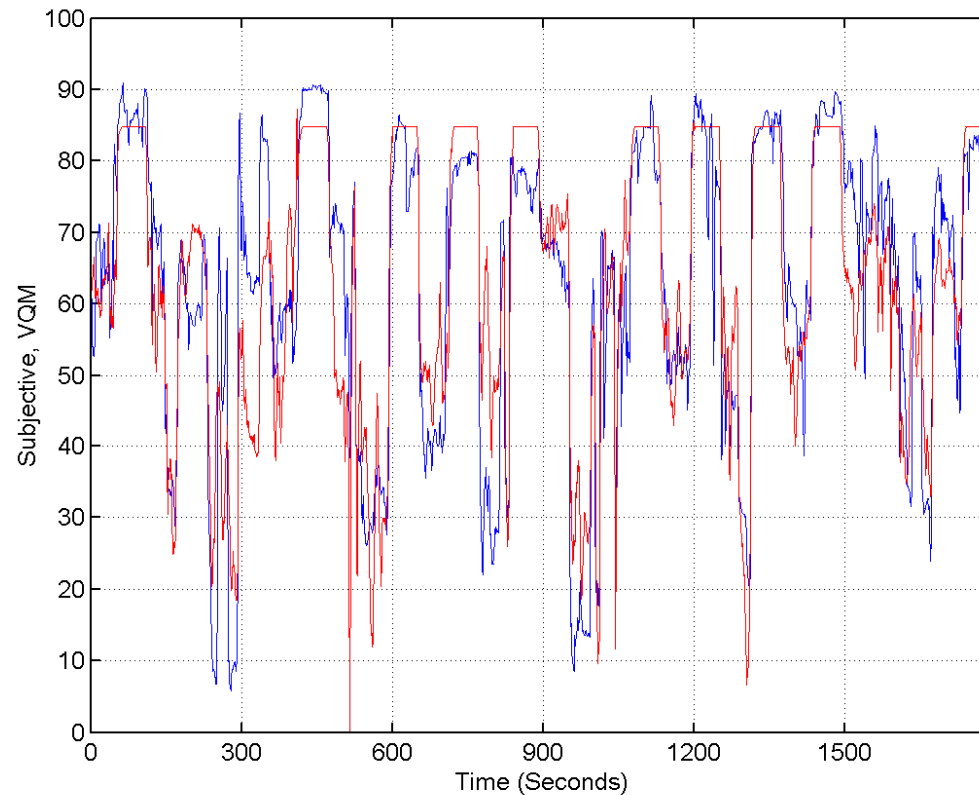



Outline of Presentation

- New Measurements Required
- Subjective Video Performance
- Objective Video Performance
- Video Standardization Efforts
- Extensions of Technology
- Demonstration of Tools

Objective Metrics and Standards – 1990's Summary

- Four National Standards in Mid-1990s
 - ANSI T1.801.01-1995 (Test Scenes)
 - ANSI T1.801.02-1996 (Terms and Definitions)
 - ANSI T1.801.03-1996 (Objective Metrics)
 - Test Signals and Patterns Did Not Correlate with Subjective (Spinning Wheel, 3D Sine waves. etc.)
 - ITS Measurements Yielded 0.88 Correlation – Suitable for Quality Monitoring (Not System Comparison)
 - Spatial-Temporal Metrics Incorporated in ITU-T Rec. P.910 (Annex A) for Objectively Quantifying Scene Criticality
 - ANSI T1.801.04-1997 (Multimedia Delay, Synch, FR)
 - Later Standardized by ITU-T (P.931)

Objective Metrics and Standards – 1990's Summary

- Hardware Feasibility Demonstrated (Real-Time, In-Service, Perception-Based)
- Reduced Reference (RR) Measurement Paradigm Adopted by the ITU
 - ITU-T Rec. J.143



Video Quality Expert's Group (VQEG)

- Founded and Co-Chaired by ITS Staff (1997)
 - ITU-T SG 9 & 12, and ITU-R WP 6Q Experts
- ITS Manages
 - Website (www.vqeg.org)
 - Doc Server (<ftp://ftp.its.bldrdoc.gov/dist/ituvidq/>)
 - Video File Server (<ftp://vqeg.its.bldrdoc.gov/>)
- Mission – Validate Objective Video Quality Metrics & Forward Test Reports to ITU
 - Independent Lab Group (ILG) Conducts Tests
- ITU Writes and Approves Recommendations

Video Quality Expert's Group (VQEG) Full Reference TV (FRTV) Phase 1

- From 1997 to 2000
- 8 Subjective Labs, 10 Objective Proponents
- 20 Source Sequences (split 525 & 625)
- 32 Video Systems
- No Clear "Winner"
 - ITU-T J.144 (March 2001)
 - VQEG Phase 1 Report




Committee T1 Technical Reports


- From 2000 – 2002
- Jointly Developed by ITS and Sarnoff
 - VQEG Phase 1 Spin-off
- Five Committee T1 Technical Reports
 - T1.TR.72 - Specifying Accuracy and Cross Calibration of Video Quality Metrics
 - T1.TR.73, 74, 75, 77 - Calibration, PSNR, JND, Test Code and Data

Committee T1 Technical Reports

- Resolving Power & Classification Errors

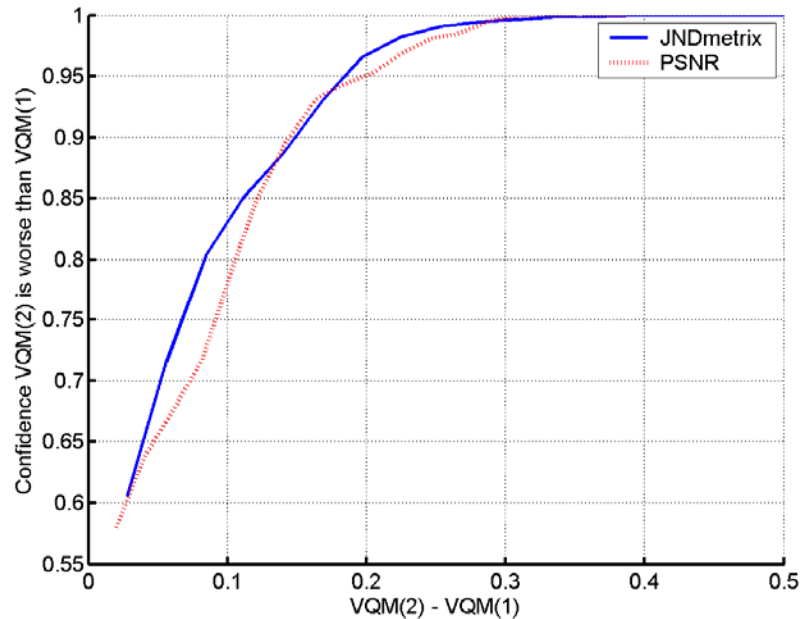

Resolving Power

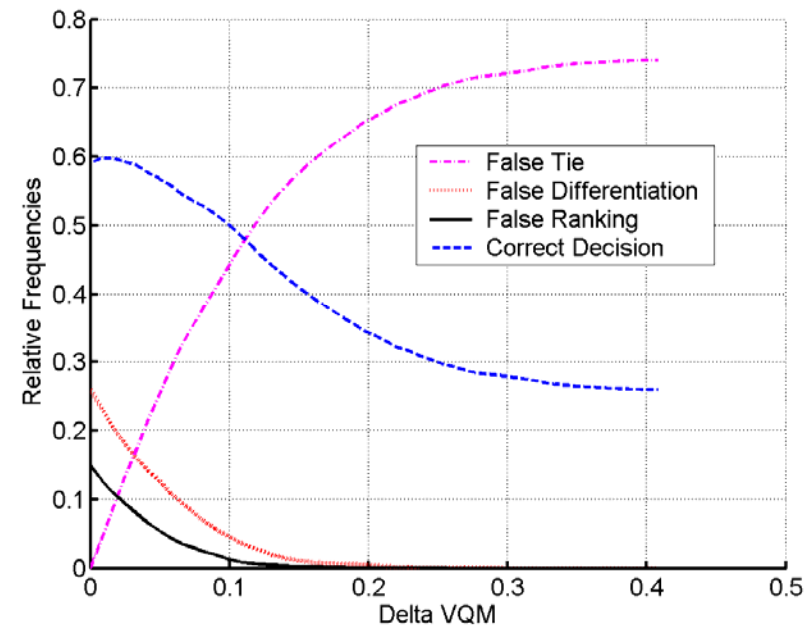

Classification Errors

A decorative graphic on the left side of the slide features a vertical black line intersecting a horizontal black line. To the left of the intersection, there are three overlapping squares: a yellow one at the top, a red one in the middle, and a blue one at the bottom. The squares have a slight gradient and are partially obscured by the lines.

Committee T1 Technical Reports

- Revised For Clarity

- T1.TR.72-2003 (Approved Dec., 2003) "Methodological Framework for Specifying Accuracy and Cross-Calibration of Video Quality Metrics."

- International Recommendation

- ITU-T Recommendation J.149 (Approved Mar., 2004) "Method for Specifying Accuracy and Cross-Calibration of Video Quality Metrics (VQM)."

Video Quality Expert's Group (VQEG) Full Reference TV (FRTV) Phase 2

- From 2000 to 2004
- 3 Subjective Labs, 8 Objective Proponents (2 Withdrew)
- 26 Source Sequences (split 525 & 625)
- 24 Video Systems
- Four Systems Were Recommended
 - ITU-T J.144 (March 2004)
 - ITU-R BT.1683
 - VQEG Phase 2 Report



ITS General VQM

- Submitted to VQEG Phase II FRTV Tests
- Designed for Wide Range of Video Systems
 - Hence the name "General" VQM
- High Bandwidth RR VQM
 - Mbits/s of Reference Information
- Top Performing VQM in VQEG Tests
 - Only VQM in Top Performing Group (at 99% Level) for Both 525-line and 625-line TV Standards
 - Only VQM with an Average Correlation to Subjective Score > 0.9 (Over 525-line and 625-line Tests)
 - 0.94 Correlation to 525-line Subjective Test



ITS General VQM

- North American Standardization
 - ANSI T1.801.03-2003 (Approved Sept. 2003)
“Digital Transport of One-Way Video Signals – Parameters for Objective Performance Assessment.”
 - Only Method Approved by ANSI for Video System Comparisons
 - Scope Does Not Include Transmission Errors

VQEG Timeline and Future Activities

Multimedia:
 601: TV over IP
 CIF: Streaming
 QCIF: Hand Held Video

HDTV

Multimedia

QCIF

CIF

601

RRNR-TV

FRTV-II

FRTV-I

1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008

Joint Rapporteur Group on Multimedia Quality Assessment (JRG-MMQA)

- Recently Founded (2004)
 - Audio Experts from ITU-T SG12
 - Video Experts From ITU-T SG9
 - First Several Meetings – Revised Multimedia Test Plan



Outline of Presentation

- New Measurements Required
- Subjective Video Performance
- Objective Video Performance
- Video Standardization Efforts
- Extensions of Technology
- Demonstration of Tools

Multimedia to High Definition

180 x 120, e.g., Cell Phone



360 x 240, e.g., PDA, Video Phone



720 x 480, e.g., Standard TV



1920 x 1080, e.g., High Definition TV





Multimedia

- Different than TV
- Small, Low Resolution Screens (LCDs)
- Different Physics
 - Farther Viewing Distances (in terms of Picture Height)
 - Less Pixels per Degree
- Spatial Scaling Issues
- Different Applications
 - Access to Video Signals



HDTV


- Different than TV
- Large High Resolution Screens
- Different Physics
 - Closer Viewing Distances (in terms of Picture Height)
 - Same Pixels Per Degree but Greater Viewing Angle
 - Subject Focus, Object/Scene Tracking Issues



Challenges / Questions

- Localized Errors (in space and/or time) can Have a Large Perceptual Impact
 - Very Small % of Video Stream
 - Thus, Difficult to Measure Robustly
- How Much Human Behavior Should We Really Model?
 - SSCQE Thought Experiment

SSCQE Thought Experiment

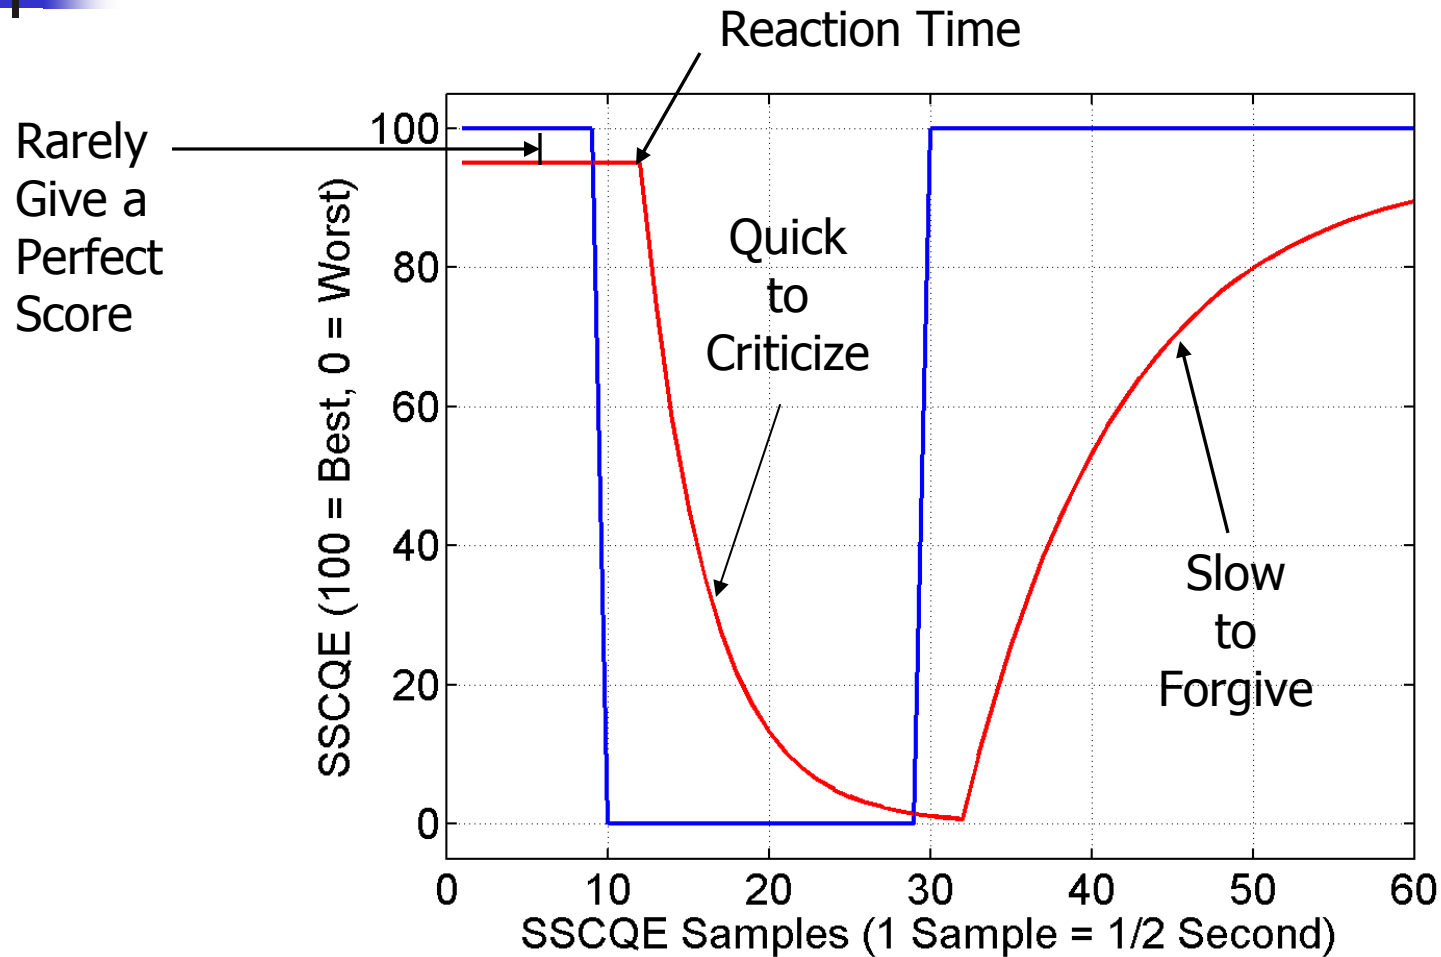

A decorative graphic consisting of a vertical black line and a horizontal black line intersecting at the origin. To the left of the intersection, there are three overlapping squares: a yellow one at the top, a red one in the middle, and a blue one at the bottom. The squares have a gradient effect, fading out towards the right.

Outline of Presentation

- New Measurements Required
- Subjective Video Performance
- Objective Video Performance
- Video Standardization Efforts
- Extensions of Technology
- Demonstration of Tools

Laboratory VQM Tool

Overview

- Designed for Bench Top Evaluation
 - Source and Destination Video Signals / files available at one PC
- UNIX (Batch) and PC (Interactive) Versions
 - PC Version Jointly Developed by ITS and Intel
 - Focus on PC Version Here

Laboratory VQM Tool Overview

- Two Software Flows
- Test Video Sequence (TVS)
 - Calibration Assisted by Special Test Pattern
 - U.S. Patent Pending
- Original (Source) and Processed (Destination) Library of Video Clips
 - Calibration Uses Scenes
 - All Clips Must be From Same HRC

Laboratory VQM Tool

Overview

- Calibration Algorithms (Spatial, Temporal, Gain & Level Offset, Valid Region)
 - Includes Calibration Root Cause Analysis
- Five VQMs (General, Video Conferencing, TV, and Developers – Fast, PSNR)
 - Includes Impairment Root Cause Analysis
- Hierarchical Presentation of Results
 - HRC VQM -> Clip VQM -> Clip Parameter -> Parameter Time Histories -> Perceptual Features

Laboratory VQM Tool Overview

- VQM Calculation is Multi-threaded
- VFW Frame Capture Included
- Video Conversion Tools Included
 - UYVY is Native Tool Format

Laboratory VQM Tool User's Manuals

- UNIX – NTIA Handbook 02-01, "Video Quality Measurement User Manual," Feb., 2002.
- PC – Web PDF Document, "Video Quality Measurement PC User's Manual," Nov., 2002.

Laboratory VQM Tool

Sample
Screen
Shots

Calibration Results

Temporal Valid Region - Manual Entry

Clip: coastguard_yuv12_orig1003353325.yuv.0	Discard From Beginning: []
15 Discard From End: 15	
Clip: coastguard_yuv12_orig1003353325.yuv.1	Discard From Beginning: []
0 Discard From End: 0	

RCA

Spatial Registration - Computed from Color Bar

Pixels: 0.00 FrameLines: 0.00

Intermediate Results

Processed Valid Region - Calculated Automatically

Clip: coastguard_yuv12_orig1003353325.yuv.0	Top: 4	Left: 6	Bottom: []
Clip: coastguard_yuv12_orig1003353325.yuv.1	Top: 4	Left: 6	Bottom: []
Clip: coastguard_yuv12_orig1003353325.yuv.2	Top: 4	Left: 6	Bottom: []
Clip: coastguard_yuv12_orig1003353325.yuv.1	Top: 4	Left: 6	Bottom: []

Gain/Offset - Computed from Scenes

Y Gain: 1.00	Cb Gain: 1.00	Cr Gain: 1.00
Y Offset: 0.00	Cb Offset: 0.00	Cr Offset: 0.00



Intermediate Results

Temporal Registration - Computed from scenes (Frame based)

Clip: coastguard_yuv12_orig1003353325.yuv.0	TimeAlignmentOffset: 0 fra
Clip: coastguard_yuv12_orig1003353325.yuv.1	TimeAlignmentOffset: 0 fra
Clip: coastguard_yuv12_orig1003353325.yuv.2	TimeAlignmentOffset: 0 fra
Clip: coastguard_yuv12_orig1003353325.yuv.1	TimeAlignmentOffset: 0 fra

Intermediate Results

Calibration Results

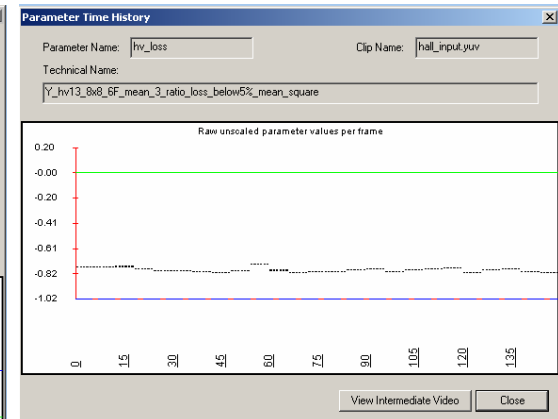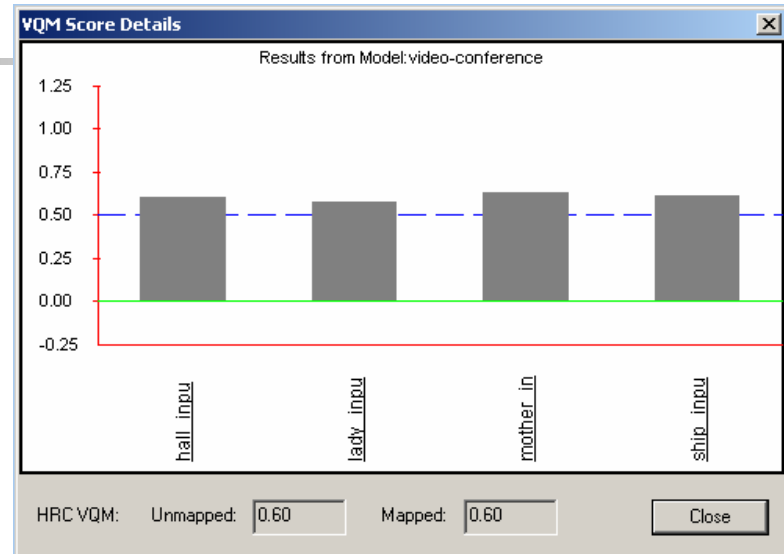

VQM Results

In-Service VQM (IVQM)

Tool Overview

- Developed by ITS (04 to 05)
- Perform End-to-End In-Service VQM (IVQM) Measurements
 - Requires Two PCs (Source and Destination)
 - RR Features Communicated over Internet
- Passive Monitoring of Video Stream
 - Attach Video Capture Probes at Two Points
 - Plot Measured Quality
- MATLAB-Based



IVQM Tool Overview

- Supports Real Time Video Capture
 - e.g., USB2 Video Capture on Laptops
 - Large RAM Requirements
- Includes Full Calibration
 - e.g., Temporal Registration, Spatial Scaling, Spatial Registration, Valid Region, Gain / Level Offset
 - Video Delay with Synchronized Clocks
- Currently Implements 4 VQMs
 - General, Developer (Fast Version of General)
 - Lowbw, Fastlowbw



IVQM Tool Overview

- Non-Real Time Measurements
 - Depends on VQM and Image Resolution
- Captures Sequence -> Analyzes Sequence -> Captures Next Sequence
- User's Manual
 - NTIA Handbook, "In-Service Video Quality Metric (IVQM) User's Manual", Dec, 2005.

IVQM Tool Setup Screen

Set-Up for In-Service VQM
_ □ ×

End-to-End Communication Medium

FTP ▾

Local FTP Site Path:
c:\ftp\ivqm

FTP Host:
ivqm1.its.bldrdoc.gov

FTP Username:
anonymous

FTP Password:

FTP sub-directory:
ivqm

Validate FTP Communication

Video Source

Video Capture Device ▾

Video Capture Device:
WinFast TV USB II ▾

Image Size & Color Space:
YUY2_720x480 ▾

Video Source:
composite ▾

Capture Interlaced or Progressive:
Interlace, upper field first ▾

Directory for Temporary Storage:
C:\temp\

Preview Video Stream

Calibration

Combined Temporal Registration Uncertainty
3 sec ▾

Delay Between Source & Destination Capture
0 sec ▾

Scale, Shift, Gain/Offset & Valid Region
Calculate at the beginning & combine all results ▾

Number of Sequences Used:
7 sequences ▾

Video Quality Model

Low Bandwidth Model ▾

Video Sequence Length

10 sec ▾

Accept Setup

IVQM Tool Monitoring Screen

In-Service VQM, Master, Source Side

File Edit Options Help

```

DESTINATION SETUP
-----
Capture video using device 'WinFast TV USB II'
  720x480, color space 'YCbCr', 29.97 fps, interlace upper field first
  Buffer video to 'C:\temp\'
End-to-End communicate with shared directory '\\pine\shared\transmit'

14:25:07  Scale: H=1000, V=1000 Shift: H=0, V=0 Valid: (11,15)(472,706) Gain: 1.00 Offset: 1.2
          Delay VQM      hv loss hv gain si loss si gain color comb noise error
14:25:07  +0.3s  0.03882  0.00000  0.02141  0.01741  0.00000  0.00000  0.00000  0.00000
14:30:32  Scale: H=1000, V=1000 Shift: H=0, V=0 Valid: (11,15)(472,706) Gain: 1.01 Offset: 1.2
          +0.3s  0.02345  0.00000  0.01450  0.00895  0.00000  0.00000  0.00000  0.00000
    
```

Start VQM

Stop VQM

Temporal Registration

New Measurement Tools (Available Shortly)

- Command-line VQM (CVQM)
 - Simple Window's Command Line Interface
- Batch VQM (BVQM)
 - GUI Interface
 - Greatly Simplify Batch Processing on PC
- Dynamically Linked Library (DLL)
 - Standard Interface for Third Party Applications