


2,279 METERS BOUYANT
POLYOLEFIN MOORING LINE

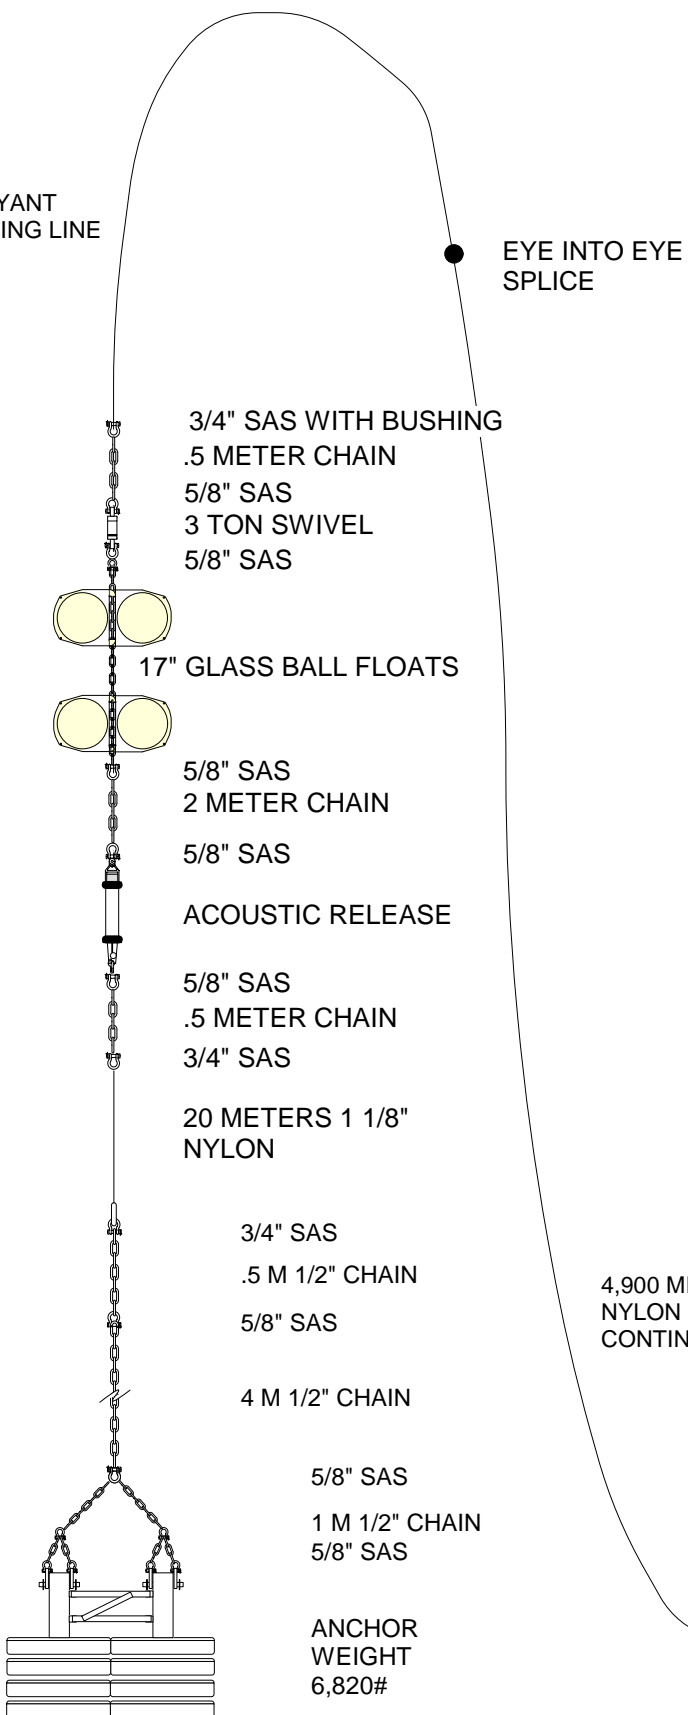

3/4" SAS WITH BUSHING
.5 METER CHAIN
5/8" SAS
3 TON SWIVEL
5/8" SAS

17" GLASS BALL FLOATS

5/8" SAS
2 METER CHAIN

5/8" SAS

ACOUSTIC RELEASE

5/8" SAS
.5 METER CHAIN
3/4" SAS

20 METERS 1 1/8"
NYLON


3/4" SAS
.5 M 1/2" CHAIN
5/8" SAS

4 M 1/2" CHAIN

5/8" SAS
1 M 1/2" CHAIN
5/8" SAS

ANCHOR
WEIGHT
6,820#

4,900 METERS
NYLON LINE,
CONTINUOUS

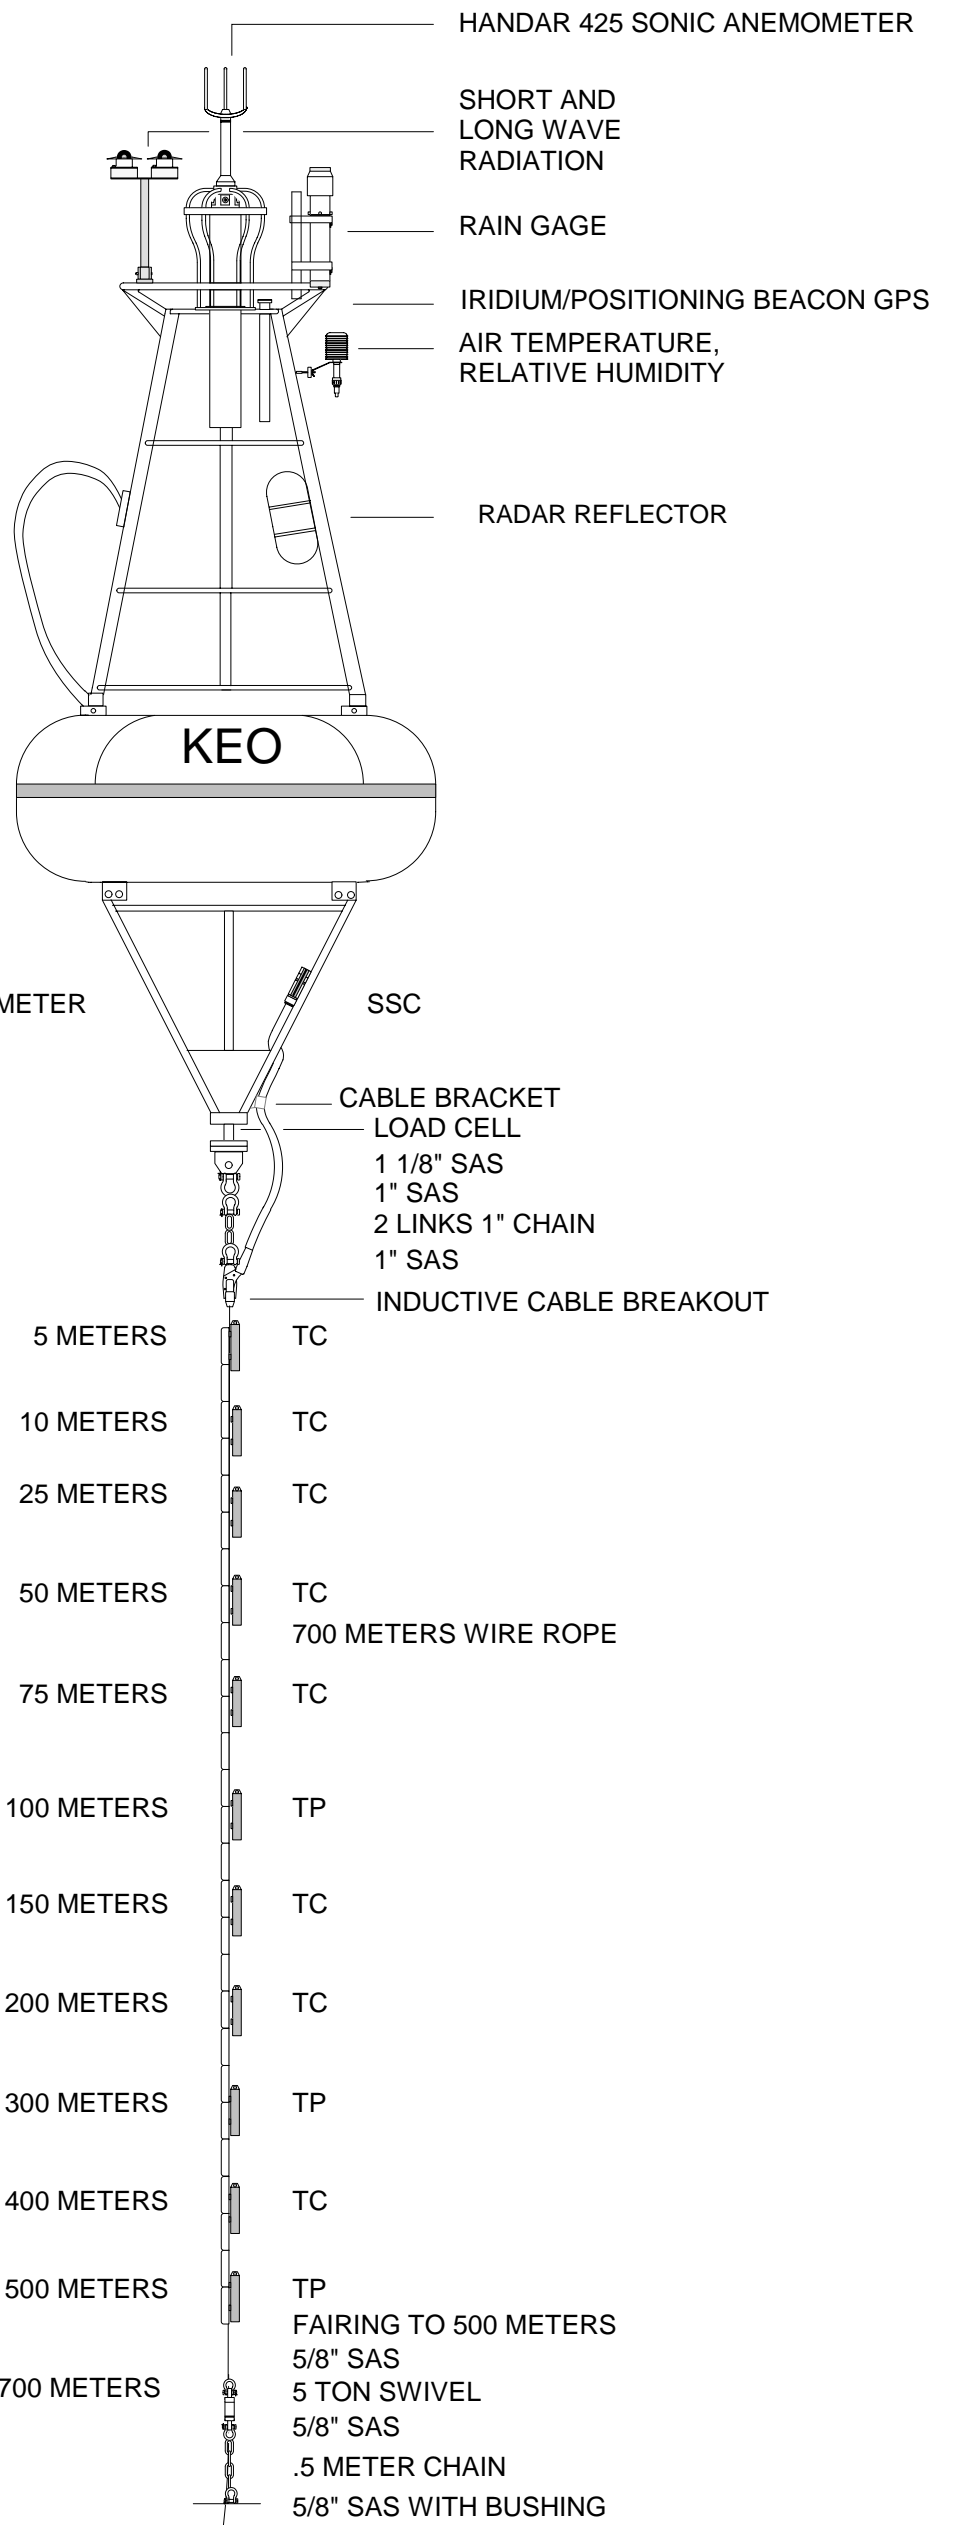

HANDAR 425 SONIC ANEMOMETER
SHORT AND
LONG WAVE
RADIATION
RAIN GAGE
IRIDIUM/POSITIONING BEACON GPS
AIR TEMPERATURE,
RELATIVE HUMIDITY
RADAR REFLECTOR

KEO

1 METER

SSC

CABLE BRACKET
LOAD CELL
1 1/8" SAS
1" SAS
2 LINKS 1" CHAIN
1" SAS

INDUCTIVE CABLE BREAKOUT

5 METERS

TC

10 METERS

TC

25 METERS

TC

50 METERS

TC

700 METERS WIRE ROPE

75 METERS

TC

100 METERS

TP

150 METERS

TC

200 METERS

TC

300 METERS

TP

400 METERS

TC

500 METERS

TP

FAIRING TO 500 METERS

700 METERS

5 TON SWIVEL

5/8" SAS

.5 METER CHAIN

5/8" SAS WITH BUSHING

10 METERS
NYLON
STIFFENER

DEPTH: 5650 METERS



NOAA-PMEL-KE
7600 Sandpoint Way NE
Seattle, Wa. 98115
(206) 526-6149

MOORING: KEO

SCOPE: 1.4:1

DRAWN BY: Rick Miller

DATE: 1 MAY 2004

APPROVED BY:

DATE: