

Coastal Ocean Forecasts

Real-Time Forecasts of Physical State of Water Level, 3-D Currents, Temperature, Salinity for U.S. East Coast

Dr. John G.W. Kelley
Meteorologist
National Centers for Environmental Prediction

Dr. Frank Aikman III
Senior Oceanographer
National Ocean Service

Dr. Laurence C. Breaker
Senior Research Physical Scientist
National Centers for Environmental Prediction
National Oceanic & Atmospheric Administration
and

Professor George L. Mellor
Professor Emeritus
Princeton University
Princeton, New Jersey

Major strides have been made in weather prediction over the past 30 years, yet equal advances in the prediction of the state of the coastal ocean have not occurred. The coastal zone in the United States is under ever increasing stress because of the mounting pressures brought about by the migration of population to coastal areas. Protection of life and property, environmentally sensible and productive use of coastal resources, and maintenance of economic activities such as marine commerce demand major advances in our understanding of the coastal ocean and in our ability to observe this environment and to predict its changes. Major storms, with the attendant storm surges and high waves, can inflict enormous economic loss and human suffering; hazardous material spills can have severe impacts on the local ecology and human health; and disruptions in local sea traffic due to bad weather, high seas,


and fog can have a major impact on the transportation industry. Thus, information on the present and future state of the coastal ocean is of critical importance to the residents, industries, and businesses in the nation's coastal zone, and to the management of coastal resources.

The Coastal Ocean Forecast System (COFS) has been developed by the National Oceanic & Atmospheric Administration (NOAA) to address this problem. COFS takes advantage of the state of the art in numerical hydrodynamic modeling and the availability of remotely sensed and *in situ* observations to produce real-time forecasts of coastal water levels and three-dimensional currents, temperature, and salinity. COFS is the result of the cooperative development between NOAA's National Ocean Service

(NOS), National Weather Service [NWS's National Centers for Environmental Prediction (NCEP)] and Coastal Ocean Program, the U.S. Navy, and Princeton University.

System Description

COFS has been producing experimental 24-hour simulations since August 1993 for waters along the East Coast of the United States¹. The system consists of the Princeton Ocean Model (POM)², forced at the surface by forecast surface fluxes of momentum, heat, and moisture derived from a high-resolution atmospheric forecast model. The POM uses a bottom-following sigma-coordinate vertical grid, a coastal-following curvilinear orthogonal horizontal grid, and includes a turbulence submodel to determine vertical mixing³. The prognostic vari-

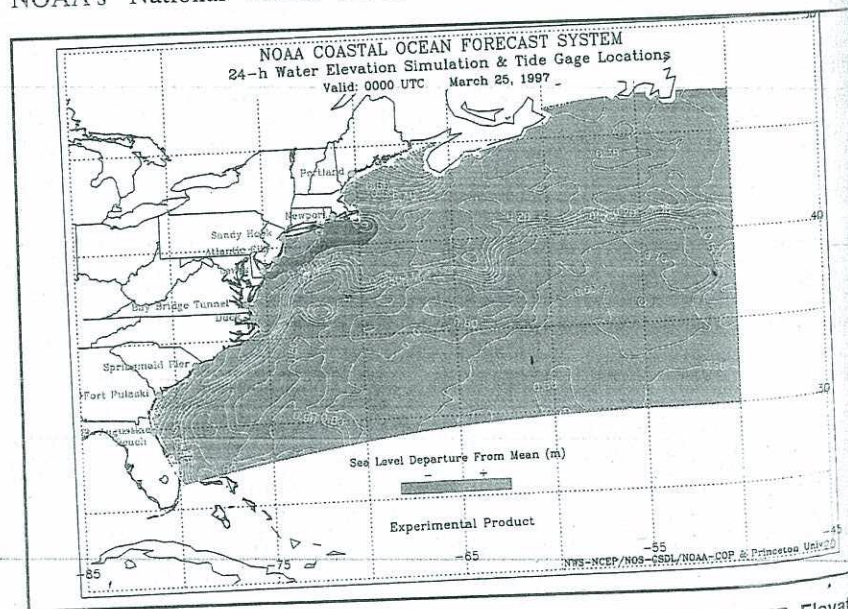

Example of a COFS 24-hour surface elevation simulation for 25 March 1997. Elevation contours are expressed in meters (0.1-meter interval). The locations of 10 NOS coastal water level gauges are indicated.

24-hour Simulated & Observed Subtidal Water Levels (October 1993 to September 1995)

Coastal Station	RMS Difference (meter)	Correlation Coefficient	Ratio Model: Observed Standard Deviation
Portland	.099	.667	1.073
Newport	.099	.721	1.082
Sandy Hook	.108	.809	1.058
Atlantic	.122	.798	0.978
Lewis	.110	.801	0.969
Chesapeake	.126	.725	0.963
Duck	.114	.731	0.862
Springmaid	.121	.700	0.935
Pulaski	.120	.788	0.893
Augustine	.120	.728	0.792
Average	.113	.747	0.961

Note: Geographical locations represented by short titles of coastal stations are Portland, Maine; Newport, Rhode Island; Sandy Hook, New Jersey; Atlantic City, New Jersey; Lewis, Delaware; Chesapeake Bay Bridge Tunnel; Duck, North Carolina; Springmaid Pier, South Carolina; Fort Pulaski, Georgia; Saint Augustine, Florida.

minute gridded), modified over the continental shelf with the more accurate NOS-15 (15 second gridded) bathymetry. At the shoreward boundary the model's minimum depth is 10 meters. The ocean model runs daily, producing 24-hour simulations. Each COFS simulation uses the previous day's 24-hour simulation to provide initial conditions for the next model run.

Coastal Water Level


Two years (October 1993 to September 1995) of comparisons between 24-hour simulated and observed subtidal (wind-driven) coastal water levels at 10 NOS coastal water-level gauge sites indicate an average root mean square (RMS) difference of 11 centimeters, a correlation coefficient of 0.75, and that the simulations represent over 95 percent of the observed

Observed (solid lines) and COFS 24-hour simulated (dashed lines, called cfs3.1b here) water levels at two locations (Springmaid Pier, South Carolina and Atlantic City, New Jersey). Total water level (left panels) for 1-15 July 1996 and subtidal (30-hour low-pass filtered) water level time series (right panels) for 15 May-15 November 1996 are shown. All the time series have been demeaned over this six-month evaluation period. Note the vertical scale change from the left to right panels. Noteworthy high-water events (storm surge) occur about 12-13 July (Hurricane Bertha), in late August to early September (Hurricanes Edouard and Fran), and 7-8 October (an extratropical storm).

ables of the model are the free-surface elevation, potential temperature, salinity (hence density), and velocities. Astronomical tidal forcing along the open boundaries for tidal constituents and body forcing within the ocean model domain are prescribed. A least-squares optimization technique was devised to solve for the boundary tidal forcing, using observed tidal constituents within the model domain⁴.

The surface forcing consists of heat, moisture, and momentum fluxes derived every three hours from consecutive 24-hour forecasts of NCEP's Eta mesoscale model⁵. The Eta model has 29-kilometer resolution in the horizontal and 38 levels in the vertical. At present, the coupling is one-way (interactive); i.e., the surface heat and momentum fluxes are calculated from the Eta 10-meter atmospheric parameters and the POM sea-surface temperature (SST). In its present configuration, the POM has horizontal resolution that varies from 10 kilometer


nearshore to 20 kilometer offshore, with 19 sigma levels in the vertical. The domain extends from the Florida Straits to Newfoundland and offshore to 50° W. The model bathymetry is based on the U.S. Navy DBDB-5 (Digital Bathymetric Data Base; 5

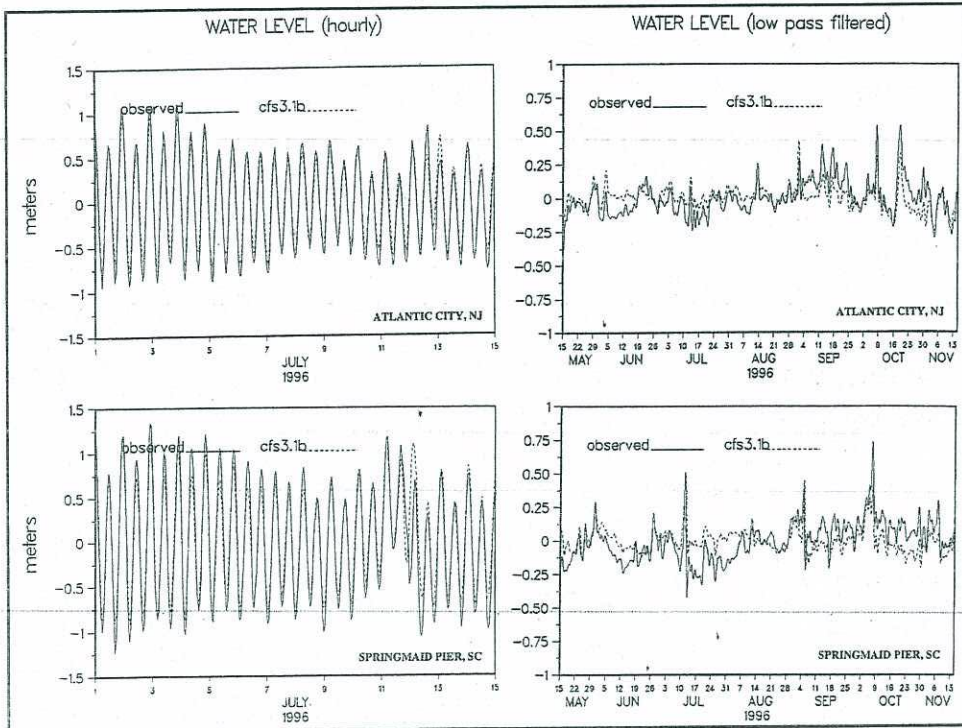

subtidal variability (see table). Wind-driven set-up and set-down events along the coast are well represented in the forecasts, although, depending on the nature of the event, there still remain some amplitude and phase discrepancies.

Tidal forcing was introduced into the COFS system in May 1996. Total (tide-plus-wind-forced) and subtidal (30-hour low-pass filtered) water level forecasts versus the observed water levels are shown in two examples (at Springmaid Pier, South Carolina and Atlantic City, New Jersey). Six months of experimental results indicate that the tides improve the model subtidal response at the coast by more than 10 percent (i.e. lowers the RMS difference with observations). Non-linear interaction of the tide with the wind-driven response in the shallow coastal regions of the model domain may account for this improvement, but more tests are required to confirm this.

A number of numerical experiments have been conducted to test the sensitivity of these results to grid resolution, bathymetry, model physics, and the forecast wind fields. The subtidal water levels do not appear to be too sensitive to any of these factors,

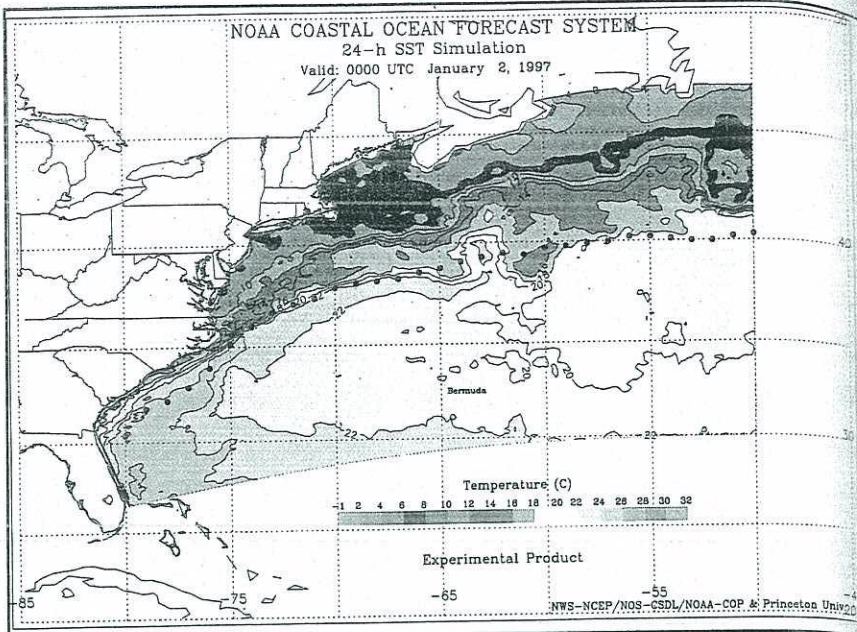

A COFS 24-hour SST simulation for 2 January 1997, which includes the assimilation of in situ and remotely sensed SST observations. The dots indicate the five-year mean Gulf Stream landward surface edge (e.g. North Wall).

although we are still investigating the effects of refining the grid resolution near the coast, where it may be an important factor with respect to the tidal fluctuations. The sensitivity results indicate that the subtidal component of the water level at the coasts

is primarily dependent on the quality of the forecast wind field.

It was anticipated that beginning each forecast cycle from a hindcast (or nowcast) calculation using, for example, the Eta analyzed wind fields, would result in some improvements from the present system, which uses the previous day's 24-hour simulation as the initial condition. In fact, preliminary experimental results indicate that the addition of a 24-hour nowcast cycle does further improve the model subtidal response by about 20 percent. Once the operational data assimilation cycle is introduced to the system, COFS will be modified from a purely simulation cycle to nowcast/assimilation and forecast cycles.

Ongoing Development

Data assimilation. In order to predict individual eddies, meandering currents, and frontal positions (e.g. associated with the Gulf Stream system), it is necessary to provide frequent updates of the initial state of the ocean. This is accomplished by assimilating oceanic data into COFS. As a first step, a data assimilation system is being developed and tested to assimilate surface and subsurface temperature observations into COFS. Later, the system will be expanded to include satellite altimetry data to improve the description of the subsurface structure⁶.

The system is based on two data assimilation schemes. First, observed temperatures are assimilated into the



320B/P

ECHOSOUNDER

See us at Oceanology '97
Singapore (Booth C13)




Rugged Splashproof Survey Solutions

Available packaged with a splashproof pentium, or interface with your own PC.

Homepage: <http://knudsenengineering.com>
 E-Mail: info@knudsenengineering.com
 10 Industrial Road, Perth Ontario Canada K7H 3P2
 Phone: 613 267-1165 Fax: 613 267-7085

model's top layer following the method of Derber and Rosati⁷. A correction field is applied to the model temperature field at each model time step. The correction field is determined by an optimum interpolation scheme framed as an equivalent variational problem⁸. The functional has two terms: one is a measure of the fit of the corrected temperature field to the model temperature field and the other is a measure of the fit of the corrected temperature field to the observations. The solution is a correction field which balances information from the observations and the model. Next, surface temperature corrections are projected into the mixed layer following the method of Chalikov *et al.*⁹

Presently, an experimental version of COFS is being tested at NCEP which assimilates real-time *in situ* and remotely sensed SST observations. The *in situ* observations include reports from drifting and moored buoys. The remotely sensed observations consist of multichannel SST retrievals derived from measurements from the Advanced Very High Resolution Radiometer on board NOAA's polar-orbiting satellites. The number of retrievals in the COFS domain on a particular day varies from approximately 1,000 to 6,000 observations. In the future, the data used for assimilation will also include subsurface temperatures (i.e., expendable bathythermographs). The data assimilation system will form the basis of a COFS nowcast/assimilation cycle to generate a daily three-dimensional nowcast. This nowcast will then serve as the initial conditions for a daily 24-hour COFS forecast.

Coastal Circulation. It is difficult to obtain reliable estimates of surface currents in the coastal ocean—the circulation is especially complex because of the importance of wind-driven effects, tides, and frictional effects in shallow waters. Thus, it is anticipated that there will be considerable interest in the three-dimensional (3-D) flow fields produced by COFS, particularly on the continental shelf and closer to the coast. Surface currents are needed in coastal areas for: (1) search and rescue missions conducted by the Navy and the Coast Guard; (2) determining the fate of pollutants discharged into the coastal ocean, including oil spills; (3) estimating the distributions of biota; and (4) optimum ship routing. Information on the 3-D currents will be of value for water-quality model-

ing, for examining the behavior of fisheries, and for estimating transport and resuspension of sediments.

One of the primary outputs of the COFS is the 3-D field of motion. More specifically, the horizontal and vertical components of velocity are calculated for every time step and at every grid point in the model domain. Because tidal forcing is included in COFS, both instantaneous and daily-averaged values of the velocity components are currently produced. To fully resolve the semidiurnal tide along the U.S.

East Coast it may be necessary to sample the model output as frequently as once per hour. An example (see figure) shows the surface flow field produced by COFS for the Gulf of Maine, Georges Bank, and surrounding shelf at 2100 Universal Time Coordinate (UTC) on 1 March 1995. Relatively strong flow over Georges Bank due to the incoming tide is clearly indicated and is in qualitative agreement with observations in this area.

At the present time the surface currents for the top layer of the model are

the assimilation of the five-year mean

ent on the quality field.

d that beginning from a hindcast (or using, for example, wind fields, the improvements stem, which uses 4-hour simulation. In fact, preliminary results indicate that 24-hour nowcast improve the model about 20 percent. data assimilation to the system, ed from a purely nowcast/assimilates.

nt In order to press, meandering positions (e.g. Gulf Stream system) to provide initial state of the fished by assimilation to COFS. As a data assimilation system is tested to assimilate surface temperature COFS. Later, needed to include to improve the subsurface

l on two data First, observed data is assimilated into the



Excellence in Instrumentation

- Advanced systems and sensors for environmental data acquisition
- Industry-leading telemetry systems


Visit www.falmouth.com for this month's news:

NEW FOR 1997!
WAVE, TIDE CURRENT METER
3D-WTCM

Falmouth Scientific, Inc.
1140 Rte 28A Cataumet MA 02534
tel 508-564-7640
fax 508-564-7643
fsi@falmouth.com

adjusted to a reference depth of one meter. However, our definition of "surface" may be unsatisfactory for some applications. For example, an oil tanker with a draft of 15 meters would clearly require information on currents at a deeper level. On the other hand, models which predict the distribution and movement of oil spills require information at the true ocean surface to provide realistic initial conditions. As COFS moves into the operational arena, we plan to implement an option which will allow users to select their own surface depth. To accomplish this, an appropriate scaling law will be implemented.

The assimilation of observed surface currents into ocean forecast models is a relatively new topic. The available data upon which to draw have been sparse and the methodology for assimilating this type of information into models has not been perfected. Based on developments in extracting information on surface flow from sequential satellite imagery, it is presently possible to obtain estimates of the surface circulation in coastal areas on a regular basis¹⁰. Altimetry data from the TOPEX/Poseidon satellite is now also being used to extract

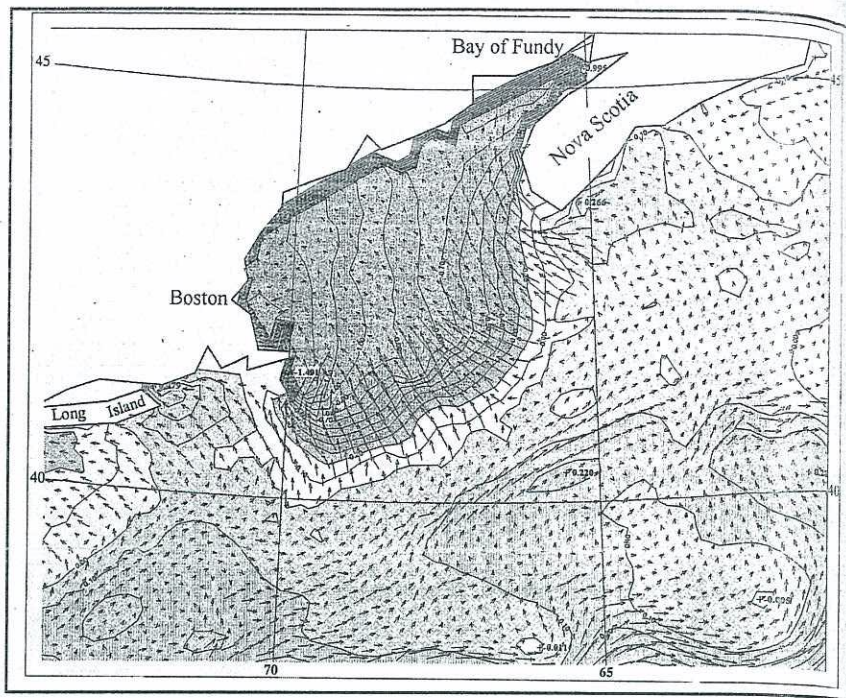


information on surface flow over the Gulf Stream region. Together, these new sources of data significantly increase the amount of data available for assimilation, and we have begun investigating methods which may be suitable for assimilating such information into COFS.

COFS surface (top model layer) currents and elevations for the Gulf of Maine and surrounding area on 1 March 1995 at 2100 UTC. Current speeds and directions are indicated by the arrows with the length of the arrow proportional to the speed. Maximum speeds occur over Georges Bank and can exceed 1 meter/second due to the incoming tide. Surface elevation contours are expressed in meters (0.1-meter interval), with the highest elevation occurring offshore (pink; greater than 0.2 meters) and the lowest values occurring in the western Gulf of Maine (purple; less than -1.1 meter).

WinFrog

Integrated
Navigation
&
Data
Management
System
Software

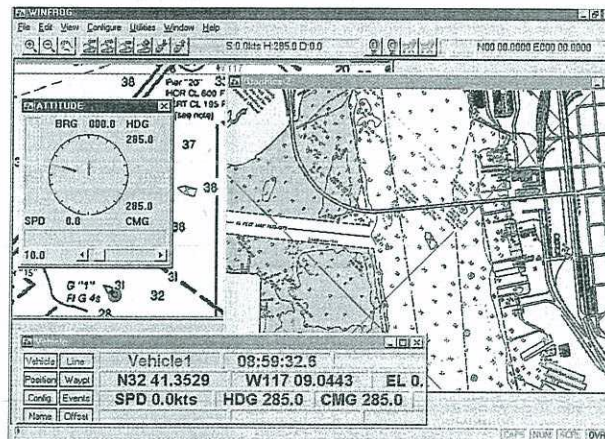

Applications:

- Hydrographic Surveys • ROV Tracking (LBL & USBL) • Seismic Surveys •
- Geophysical Surveys • Barge Management & Pipe Lay • General Navigation •
- OBC Surveys • Marine Construction • Submarine Cable Installation •

Features & Benefits:

- Custom Software Development Available • Raster Chart Integration •
- Data Processing • Data Editing • Flexible & Easy-to-Use •
- Multiple Reference DGPS Solutions • Remote Vehicle Tracking •

Racal Pelagos, Inc.
5434 Ruffin Road, San Diego, CA, USA 92123
Phone: (619) 292-8922 • E-Mail: winfrog@racal-pelagos.com
Fax: (619) 292-5308 • Internet Site: <http://www.pelagos.com>

RACAL

Lateral Boundary Conditions. On the open-ocean model lateral boundaries, the most recent observations and climatological estimates are used to prescribe the fixed transport, annual salinity, and monthly temperature boundary conditions. However, climatology is poorly-known at the scales employed by COFS. An alternative is to nest COFS within a global- or basin-scale ocean model. Such a global ocean model, which is currently under development, will help to solve the problem of specifying boundary conditions along the open boundaries of the COFS domain.

On the shoreward boundary, the fresh water inputs from 16 major rivers, bays or sounds presently enter the model domain and are based on monthly climatology. This climatology will eventually be replaced with daily observed river outflows and daily NWS forecasts of river fluxes.

Other Coastal and Regional Forecast Systems. The accuracy of the near-coastal water levels from COFS

is important to NOS because this forecast information is required to force a number of regional (estuarine) forecast systems at their coastal ocean boundaries¹¹. NOS has two regional forecast systems under development on the U.S. East Coast—in the Chesapeake Bay and in the Port of New York and New Jersey. The quality of the water level and current simulations and forecasts in both of these estuaries is dependent upon the accuracy of the open boundary conditions which could be provided from a system like COFS.

There are also regional forecast systems under development in Houston/Galveston and Tampa Bay in the Gulf of Mexico and in San Francisco Bay on the U.S. West Coast. Thus, a development effort is under way to model the Gulf of Mexico, with the expectation that this system will ultimately be coupled with the East Coast ocean model; COFS will then include the U.S. East Coast and the Gulf of Mexico. On the West Coast, the U.S. Navy Fleet Numerical Meteorological and Oceanographic Center is working on the development of a similar system that is also based on the POM¹². In the Great Lakes region, NOAA's Great Lakes Environmental Research Laboratory and Ohio State University have developed the Great Lakes Forecasting System (GLFS)—a prototype has been implemented for operational use in Lake Erie¹³. In many ways GLFS has served as a model for the COFS development effort.

Product Development and Information Dissemination. NWS and NOS are currently engaged in an outreach effort to inform commercial, government, and recreational marine users, educators, and the general public about COFS products. The outreach will involve a national workshop, continued development of the COFS World Wide Web (WWW) site, and an on-line archive of model output. The WWW site will be located at <http://polar.wwb.noaa.gov/cfs/cfsprod.html>. Digital COFS output will be available on-line for approximately three months via NOAA's National Oceanographic Data Center server. The output will be stored in the World Meteorological Organization's GRIB-coded Binary (GRIB) format on both sigma-model layers and at many standard and supplemental depths. Software and instructions for decoding GRIB files will be available from the WWW site. Eventually, COFS output

will be accessible via the NWS Family of Services distribution network. Finally, after the data assimilation cycle is implemented in COFS, the output will be made available to NWS Weather Forecast Offices and NCEP's Marine Prediction Center for evaluation.

Summary

COFS is a first step in providing real-time forecasts of the physical state of the coastal ocean, in creating a coherent utilization of many data

sources and in the transfer of techniques from the research environment to the operational environment. It is also a step towards gaining parity with atmospheric forecast systems and a necessary first step in developing a forecast capability for environmental parameters associated with water quality and biochemical processes. /st/

Acknowledgments


The authors are representing the work of a number of colleagues from NOS (Kathryn Bosley, William

model layer) currents in the Gulf of Maine and on 1 March 1995 at 0000 UTC. The arrows show the speeds and directions of the currents. The arrows are proportional to the speeds and occur over a 0.1-meter interval. Contours are drawn at 0.2-meter intervals and are plotted in the west; less than 1.1

Conditions. On the left lateral boundary, observations and data are used to transport, annually temperature. However, climate at the scales. An alternative is in a global or del. Such a global which is currently will help to solve ifying boundary open boundaries

boundary, the from 16 major presently entered are based on This climatol- e replaced with outflows and f river fluxes. Regional Fore- accuracy of the els from COFS

TRAWL RESISTANT BOTTOM MOUNTS

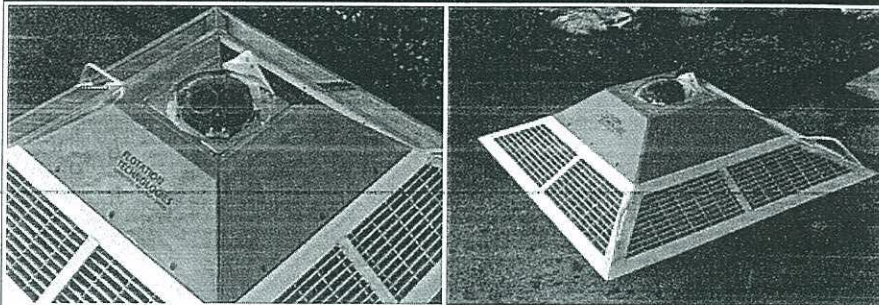

What's the real cost of losing data?

The equipment is expensive enough. But when you factor in ship time, man hours, and the lost opportunity those data represented, the real cost is much, much, higher.

Flotation Technologies, Inc. now offers a complete line of Trawl-Resistant Bottom Mounts. The 6' square unit pictured is only 18" high, and is designed to contain any compact ADCP/ADP, or other bottom mounted instrumentation.

This model features a $\pm 20^\circ$ instrument gimbal and is free fall deployable. Materials of construction include 5000 series aluminum and High Impact, Flotec™ syntactic foams. Diver deployable/serviceable models are also available. Now you can protect your valuable instrumentation....and your data.

Contact us today for a detailed quotation!
More information on this and other products is available at <http://www.flotec.com>

FLOTATION TECHNOLOGIES®

P.O. Box 1171, Biddeford, Maine 04005 USA, 1-800-639-7806 or 207-282-7749, FAX 207-284-8098, e-mail: sales@flotec.com

O'Connor, Bruce Parker, Phillip Richardson, Richard Schmalz, John Schultz, Charles Sun, and Eugene Wei), from Princeton University (Tal Ezer and Namsoug Kim), and from NCEP (Bhavani Balasubramanian, David Behringer, Dimitry Chalikov, Lech Loboeki, Christopher Peters, D.B. Rao, and Jean Thiebaux). We gratefully acknowledge their contributions to COFS and to the results reported in this paper.

This is Ocean Modelling Branch contribution number 142.

References

1. Aikman, F. III, G.L. Mellor, T. Ezer, D. Sheinin, P. Chen, L. Breaker, K. Bosley, and D.B. Rao, "Toward an Operational Nowcast/Forecast System for the U.S. East Coast," *Modern Approaches to Data Assimilation in Ocean Modeling*, P. Malanotte-Rizzoli, editor, Elsevier Oceanography Series, 61: pp. 347-376, 1996.
2. Blumberg, A.F. and G. L. Mellor, "A Description of a Three-Dimensional Coastal Ocean Circulation


- Model." *Three-Dimensional Coastal Ocean Models*, vol. 4. N. Heaps, editor, American Geophysical Union: 208 pp., 1987.
3. Mellor G.L. and T. Yamada, "Development of a Turbulence Closure Model For Geophysical Fluid Problems," *Reviews of Geophysics and Space Physics* 20: pp. 851-875, 1982.
4. Chen, P. and G.L. Mellor, "Determination of Tidal Boundary Forcing Using Tide Station Data," *Coastal Ocean Prediction*, Christopher N.K. Mooers, editor, AGU/CES Series, in press, 1997.
5. Black, T.L., "The new NMC mesoscale Eta model: Description and Forecast Examples," *Weather and Forecasting* 9: pp. 265-278, 1994.
6. Ezer, T. and G.L. Mellor, "Data Assimilation Experiments in The Gulf Stream Region: How Useful are Satellite-Derived Surface Data For Nowcasting the Subsurface Fields?" *Journal of Atmospheric and Oceanic Technology*, in press, 1997.
7. Derber, J. and A. Rosati, "A Global Oceanic Data Assimilation System," *Journal of Physical Oceanography* 19: pp. 1333-1347, 1989.
8. Behringer, D.W., "Sea Surface Height Variations in the Atlantic Ocean: A Comparison Of TOPEX Altimeter Data With Results from an Ocean Data Assimilation System", *Journal of Geophysical Research*, 99 (C12): pp. 24685-24690, 1994.
9. Chalikov, D., L. Breaker, and L. Loboeki, "Parameterization of Mixing in the Upper Ocean," NOAA/NWS/NCEP/EMC/OMB Technical Note, OMB Contribution No. 138, 40 pp., 1996.
10. Breaker, L.C., V.M. Krasnopolsky, D.B. Rao, and X.-H. Yan, "The Feasibility Of Estimating Ocean Surface Currents on an Operational Basis Using Satellite Feature Tracking Methods," *Bulletin of the American Meteorological Society* 75: pp. 2085-2095, 1994.
11. Parker, B.B., "Monitoring and Modeling of Coastal Waters in Support of Environmental Preservation," *Journal of Marine Science and Technology* 1: pp. 75-84, 1996.
12. Clancy, M., P.W. deWitt, P.W. May and D.S. Ko, "Implementation of a Coastal Ocean Circulation Model for the West Coast of the United

ECHOTRAC

DF3200 MKII

PRECISION SURVEY ECHO SOUNDER

GIVES YOU FLEXIBILITY AND VERSATILITY WITH TWO SPECIAL OPTIONS

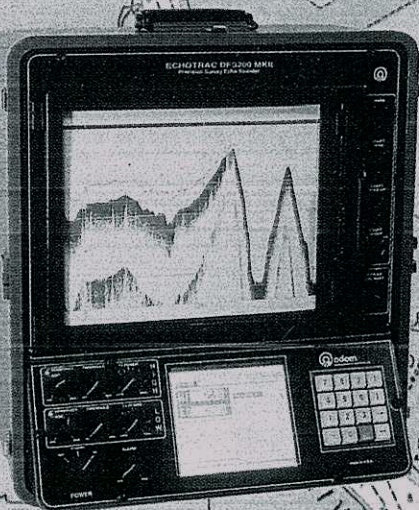

SIDE SCAN OPTION

A side-looking, 45 degree x 1 degree fixed mount transducer replaces the standard 200kHz transducer for high resolution, gray scale records of submerged objects and structures

MINISCAN OPTION

Allows for a single transducer, or a boom mounted array of up to eight transducers for full bottom coverage in inland waters - designed for use in small survey vessels.

The ECHOTRAC MKII uses the latest microprocessor technology and DSP techniques to provide 40 selectable parameters to give the surveyor maximum control and flexibility in recording quality data. Features include: 8" high resolution, gray scale thermal printer, dual frequencies from 1MHz to 12kHz, auto scale change, blanking, variable repetition and pulse length, built in annotation from GPS, bottom hardness recording, selectable output configuration, integrated heave compensation, and a unique, 4" x 5" backlit LCD that displays depths, parameters, and re-callable Help Screens providing operational instructions via the waterproof keypad.

Selected by the U.S. Naval Oceanographic Office



odom

HYDROGRAPHIC SYSTEMS, INC.

8178 G.S.R.I. Ave., Bldg. B, Baton Rouge, Louisiana, U.S.A. 70820
 TEL. (504) 769-3051 FAX. (504) 766-5122
 WEB SITE: www.odomhydrographic.com
 E-MAIL: email@odomhydrographic.com

dimensional Coast-
 s, vol. 4. N. Heaps,
 an Geophysical
 1987.

and T. Yamada,
 of a Turbulence
 For Geophysical
 Reviews of Geo-
 e Physics 20: pp.

Mellor, "Determi-
 Boundary Forcing
 on Data," *Coastal
 on*, Christopher
 ditor, AGU/CES
 997.

he new NMC
 odel: Description
 mples," *Weather
 9*: pp. 265-278.

. Mellor, "Data
 eriments in The
 ion: How Useful
 ed Surface Data
 the Subsurface
 of Atmospheric
 nology, in press.

osati, "A Global
 isimulation Sys-
 of Physical
 pp. 1333-1347.

"Sea Surface
 in the Atlantic
 son Of TOPEX
 th Results from
 ssimulation Sys-
 f *Geophysical
 2*: pp. 24685-

reaker, and L.
 etermination of
 pper Ocean,"
 EP/EMC/OMB
 IB Contribution
 96.

. Krasnopolsky,
 -H. Yan, "The
 imating' Ocean
 an Operational
 ellite Feature
*Bulletin of the
 ogical Society
 1994.*

onitoring and
 Waters in Sup-
 ntal Preserva-
 arine Science
 o. 75-84, 1996.

Witt, P.W. May
 mentation of a
 ulation Model
 of the United

States," Preprints of the *American Meteorological Society Conference on Coastal Oceanic and Atmospheric Prediction*, Jan. 28 to Feb. 2, Atlanta, Georgia, pp. 72-75, 1996.

13. Schwab, D.J. and K.W. Bedford, "Initial Implementation of the Great Lakes Forecasting System: A Real-Time System for Predicting Lake Circulation and Thermal Structure," *Water Pollution Research Journal of Canada* 29, pp. 203-220, 1994.

Dr. John G.W. Kelley is a UCAR (University Corporation for Atmospheric Research) visiting postdoctoral fellow at NCEP, where his primary focus is developing an ocean data-assimilation system for COFS. He holds a doctorate in atmospheric sciences from Ohio State University (1995) where he was involved in the development of the Great Lakes Forecasting System for Lake Erie. Kelley spent four years working in expert system technology after receiving a masters on public administration (1989) and a masters of science degree (1986) in meteorology from Pennsylvania State University.




Dr. Frank Aikman III is supervisory oceanographer in the National Ocean Service and project coordinator for the COFS development effort in NOAA. He has extensive observational and modeling experience in R&D associated with coastal process and circulation studies, with over 20 peer-review publications. He earned his doctorate (1984) and masters (1981) in physical oceanography from Columbia University's Lamont-Doherty Earth Observatory.

Dr. Laurence C. Breaker is group leader in the National Weather Service for COFS development at NCEP. He has 30 years of oceanographic experience and has worked extensively on satellite remote sensing. Breaker received a doctorate (1983) from the Naval Postgraduate School in oceanography and a masters degree (1969) in applied marine physics from the University of Miami.

Dr. George L. Mellor is co-principal investigator in the COFS development effort. The author of more than 100 publications on ocean modeling and turbulent boundary layers, he was founding director of the Program in Atmospheric and Oceanic Sciences at Princeton. Mellor received his doctorate from M.I.T. in 1957 and is a Fellow of the American Meteorological Society. The Princeton Ocean Model (developed by Mellor and Alan Blumberg) is utilized throughout the world.

THE MOST UNIQUE MEETING PLACE ON FLORIDA'S TREASURE COAST!

Harbor Branch Oceanographic Institution

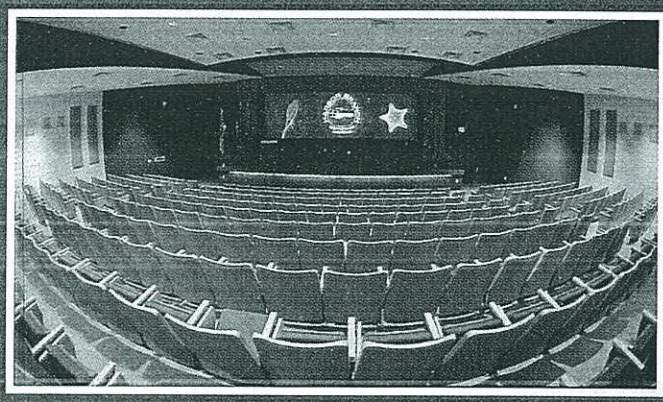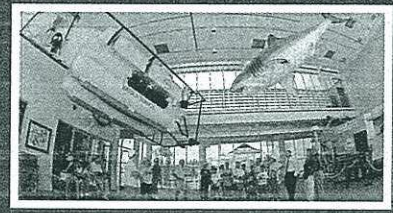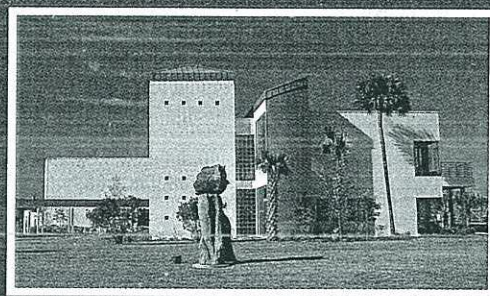

The J. Seward Johnson Marine Education and Conference Center

We are a full-service, non-residential facility featuring:

- 350-Seat auditorium with retractable writing tablets
- 6 Seminar/meeting rooms
- Sophisticated audio-visual technology
- 3 Laboratory-style classrooms
- Satellite broadcast reception
- Executive-style board room
- Gallery for food service and social functions

HARBOR BRANCH OCEANOGRAPHIC INSTITUTION, INC.

5600 U.S. 1 NORTH, FORT PIERCE, FLORIDA 34946
 (561) 465-2400, EXT 501
<http://www.HBOI.EDU>

ADA Accessible

