




**CBR FAMILY OF CURVES**

W (Percent)		BLOWS/LAYER	BLOWS/LAYER	BLOWS/LAYER
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			
	DRY DENSITY, in pcf			
	CORRECTED CBR, in percent			

CBR FAMILY OF CURVES

CORRECTED CBR PERCENT

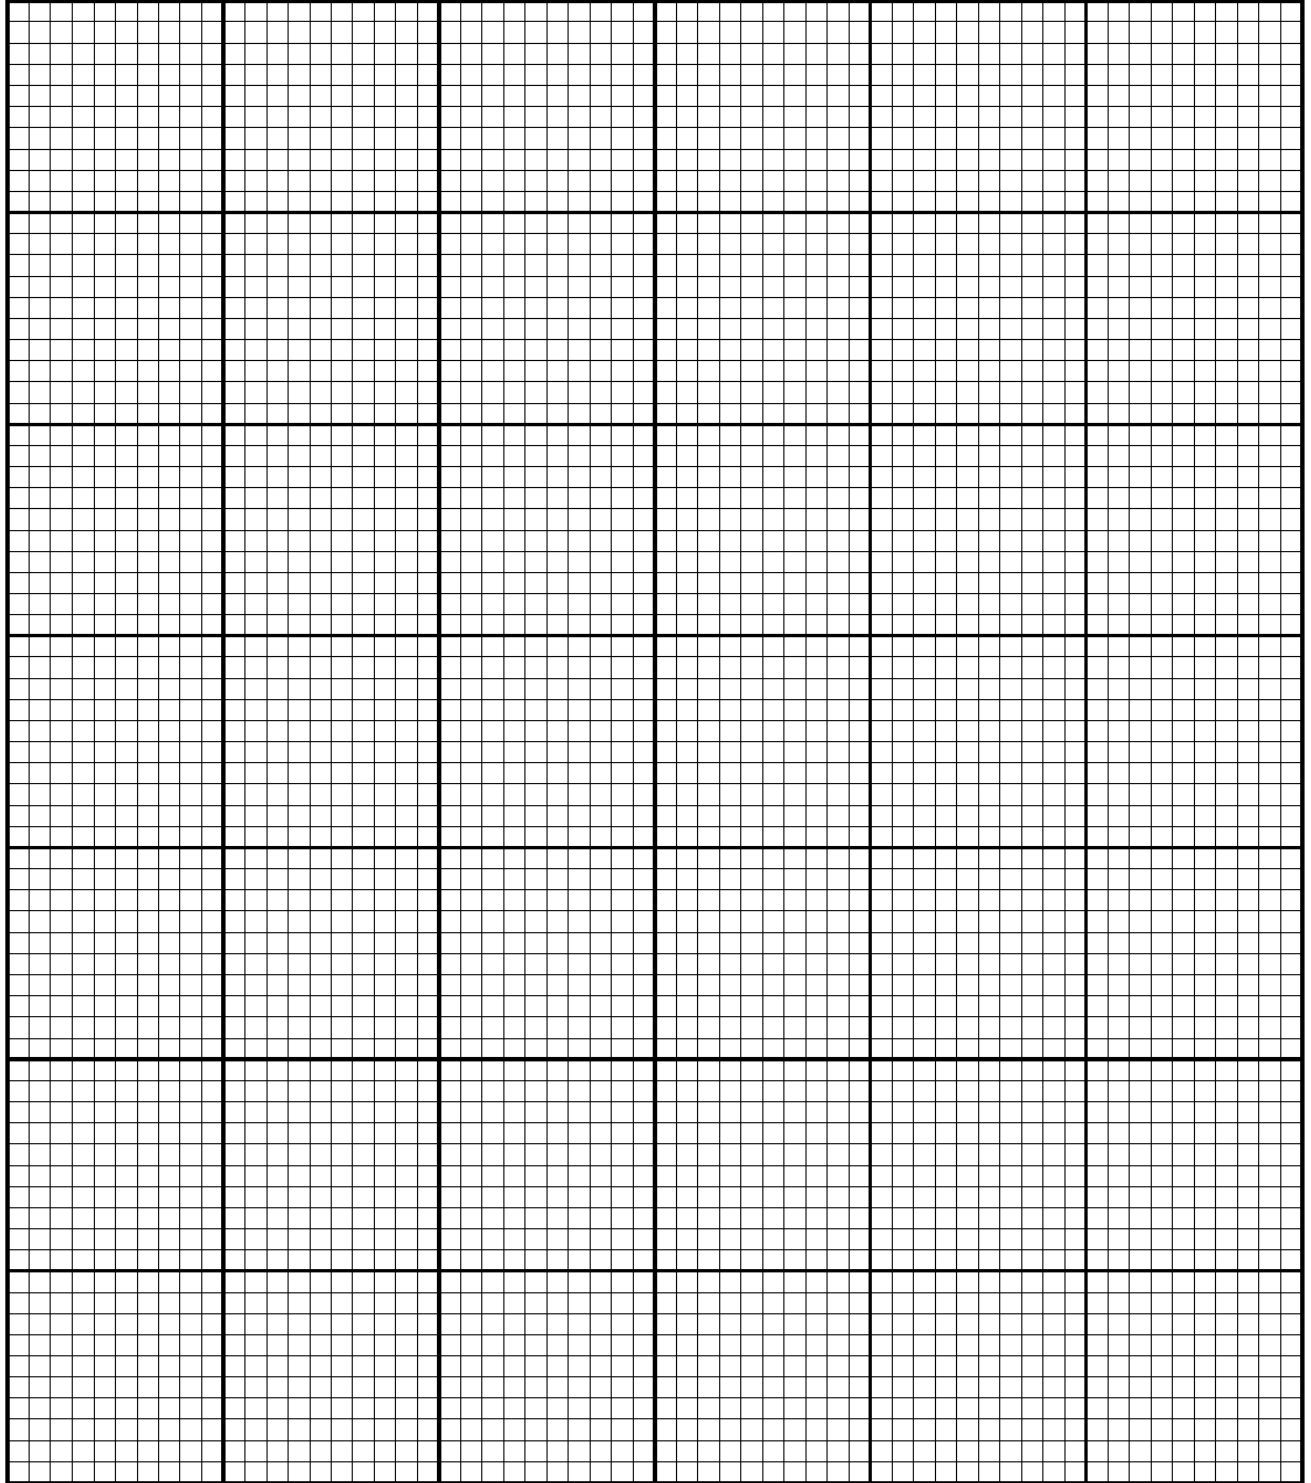


MOLDED DRY DENSITY, in pcf



CBR SWELL DATA

PERCENT SWELL (by volume)

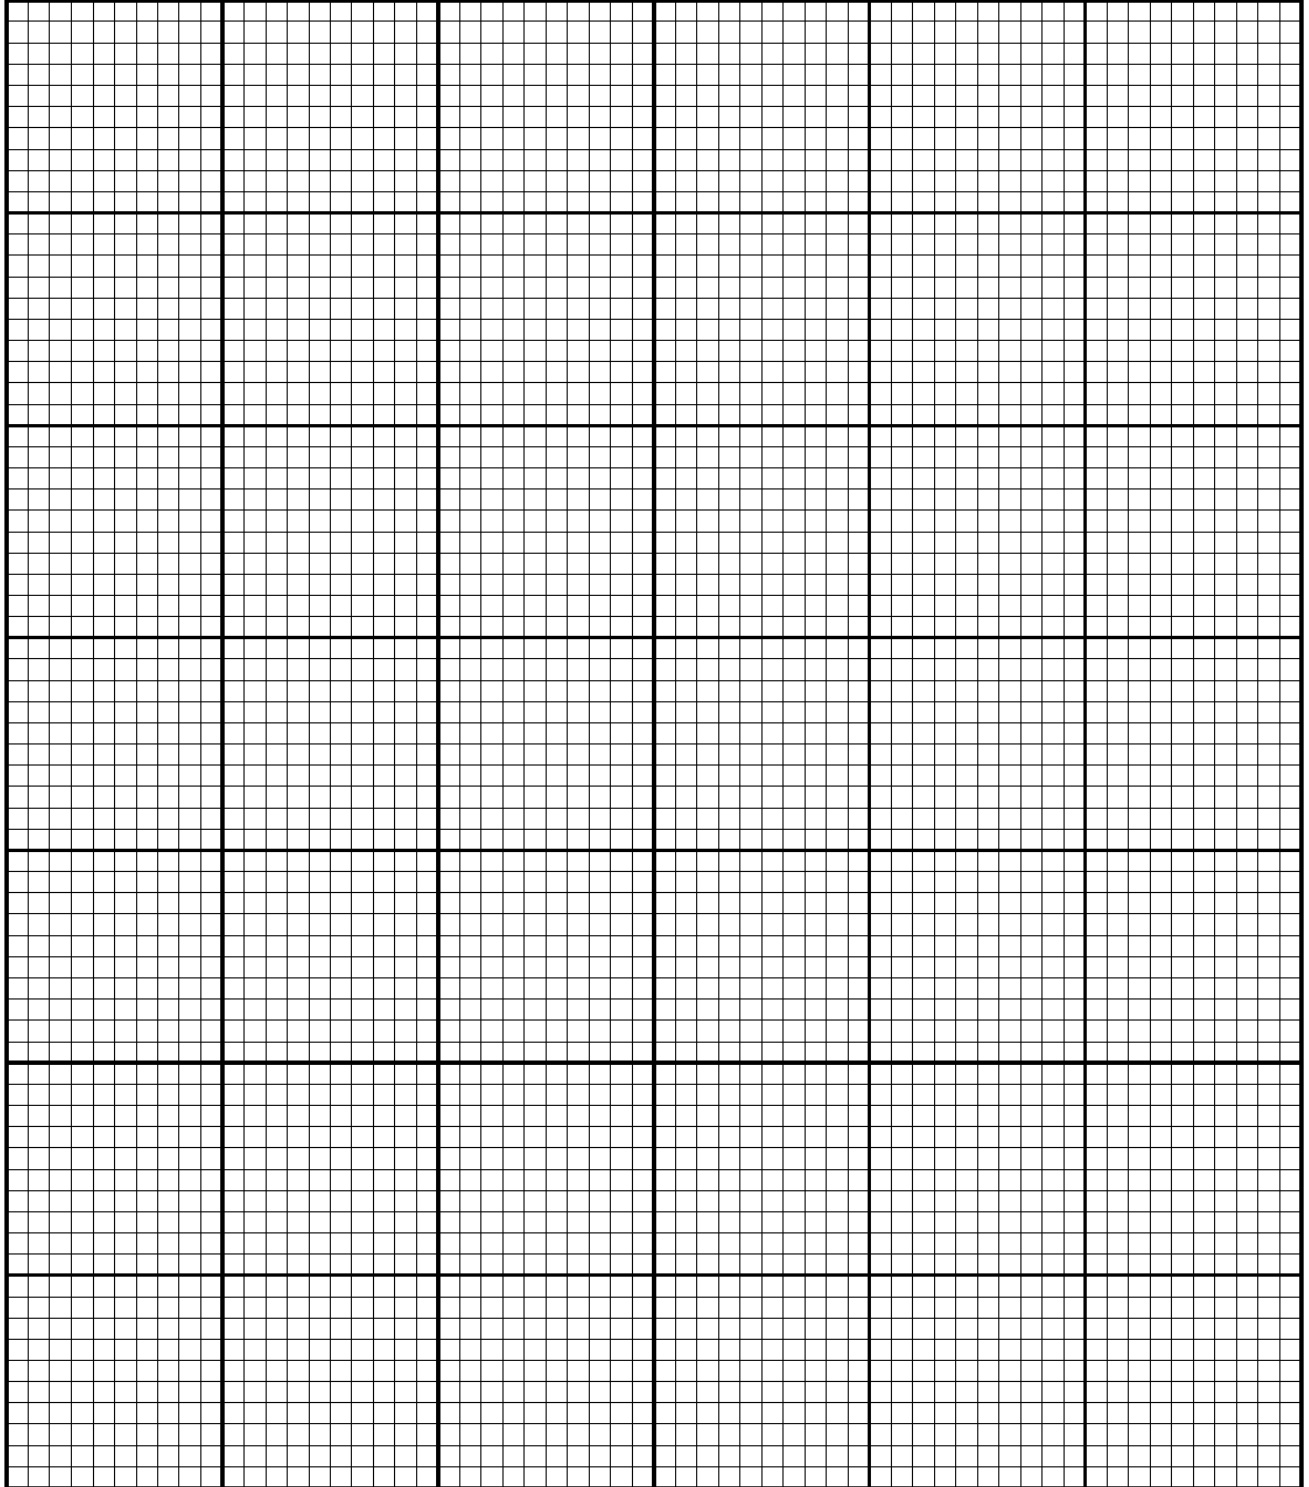

MOISTURE CONTENT, w (percent of dry weight)

NOTE: Maximum acceptable swell is 3 percent.