

Supporting Information for

Deep learning based sub-seasonal precipitation and streamflow forecasting over the source region of the Yangtze River

Ningpeng Dong¹, Haoran Hao^{2,1}, Mingxiang Yang¹, Jianhui Wei³, Shiqin Xu⁴, Harald Kunstmann^{3,5,6}

¹State Key Laboratory of Simulation and Regulation of Water Cycle in River Basin, China Institute of Water Resources and Hydropower Research, Beijing, China

²State Key Laboratory of Hydraulic Engineering Intelligent Construction and Operation, Tianjin University, Tianjin 300072, China

³Institute of Meteorology and Climate Research (IMKIFU), Karlsruhe Institute of Technology, Campus Alpine, Garmisch-Partenkirchen, Germany

⁴Hydrology, Agriculture and Land Observation (HALO) Laboratory, King Abdullah University of Science and Technology, Thuwal, Saudi Arabia

⁵Institute of Geography, University of Augsburg, Augsburg, Germany

⁶Centre for Climate Resilience, University of Augsburg, Augsburg, Germany

Correspondence to: H. Hao (1020205041@tju.edu.cn) and M. Yang (yangmx@iwhr.com)

Contents of this file

Figures S1

Tables S1 to S2

Text S1

Text S1 Evaluation of temperature forecasts

By applying the delta bias correction method to the raw ECMWF forecasts, the mean absolute bias of temperature forecasts can be reduced by 0.15°C averaged over all lead times. In particular, delta improves the forecasts more remarkably (by 0.3°C) for lead times of less than 10 days, suggesting that delta method is able to effectively reduce the sub-seasonal ECMWF temperature forecasts.

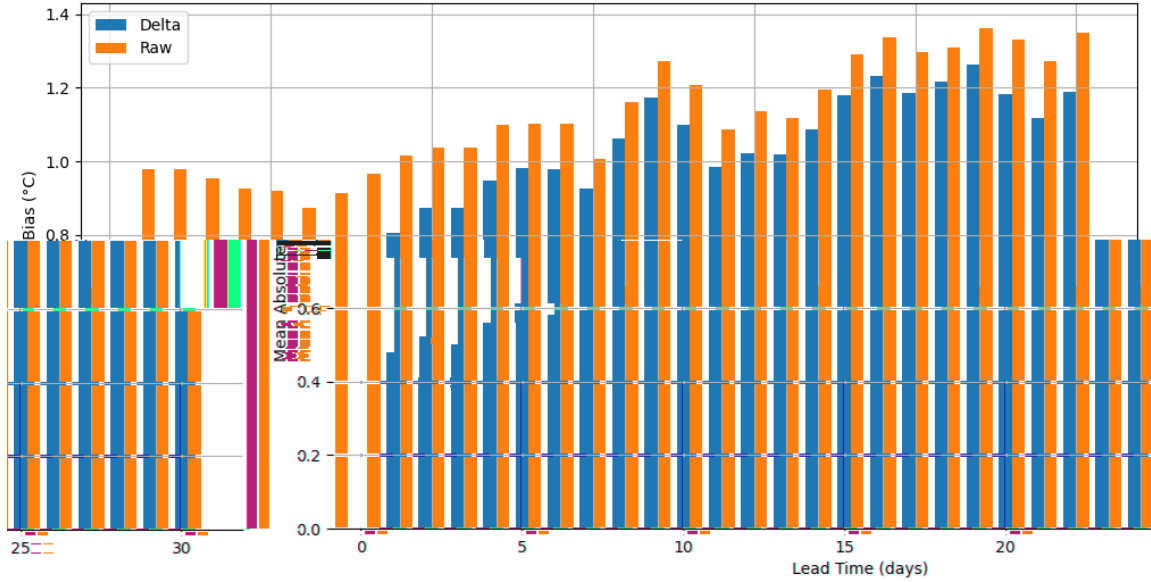


Figure S1. The mean absolute bias of temperature forecasts across lead times of 1-30 days.

Table S1. The hyperparameters in loss function of CNNs

Lead time	a	b
0~7 days	2	0.4
8~15 days	2	0.8
16~23 days	2	1.5
24-30 days	2	2

Table S2. The hyperparameters of hybrid hydrologic model

Hyperparameters	Value	Descriptions
Learning_rate	Epoch 0-30: 1e-2	Learning rate
	Epoch 31-40: 5e-3	
	Epoch 41-50: 1e-3	
Output_dropout	0.22	Dropout applied to the output of the LSTM
Seq_length	177	Length of input sequence
Hidden_size	21	Number of neurons in the hidden layer
initial_forget_bias	3	Initial value of the forget gate bias