



SHERWIN-WILLIAMS®

Equipment Reference Guide

2024

THE SINGLE SOURCE FOR ALL
YOUR EQUIPMENT NEEDS.

SPRAY EQUIPMENT

HANDHELD SPRAYERS

PRESSURE WASHERS

SPRAY ACCESSORIES

GENERATORS

CLIMBING EQUIPMENT

SPECIALIZED EQUIPMENT

SURFACE PREP EQUIPMENT



FESTOOL



TOOLPRO



Your Equipment Is an Important Investment.

Improve your results, increase your productivity and help expand your business with the right equipment.

If you need guidance on choosing your equipment...

Check out our selection guides on pages **5-11, 33, 39-40, 51, 57, 67-68, 75-76** and **83-85**.

Already know what you need?

Use the equipment charts on pages **16-29, 34-37, 41-49, 52-55, 58-65, 69-73, 77-78** and **86-91** to compare features and make your selection.

Think ahead.

Be sure to choose equipment that will support your future growth goals as well as your current needs.

Table of Contents

Which Sprayer Is Right for You?	4-5
Anatomy of a Sprayer	6-7
Airless Sprayers	8-29
Spray Guns, Tips and Accessories	30-31
HVLP and Fine Finishing	32-37
Striping Equipment	38-49
Pressure Washers	50-55
Texture Sprayers	56-64
Air Compressors	65
Ladders	66-73
Generators and Portable Heaters	74-78
Spray Source Service Centers	79-81
Sanding, Abrasives and Dust Extractors	82-91



Sherwin-Williams also offers specialty units.

Ask your local store or sales representative for more information.

Which Sprayer Is Right for You?

Find the right equipment for your business — whether you're purchasing your first sprayer or looking to expand your capabilities.



If you do this type of work...

Choose this type of sprayer



I paint houses and commercial buildings where efficiency is key.

Airless


See pages **8 – 29**.



I tackle smaller jobs — like doors and cabinets — that require more coverage and control.

HVLP and Fine Finishing

See pages **32 – 37**.

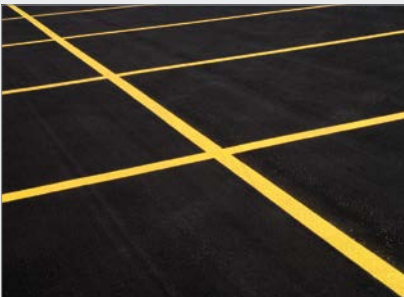

I complete line striping and removal.

Line Stripers and Pavement Specialty


See pages **38 – 49**.



I create wall and exterior texture.

Texture

See pages **56 – 64**.

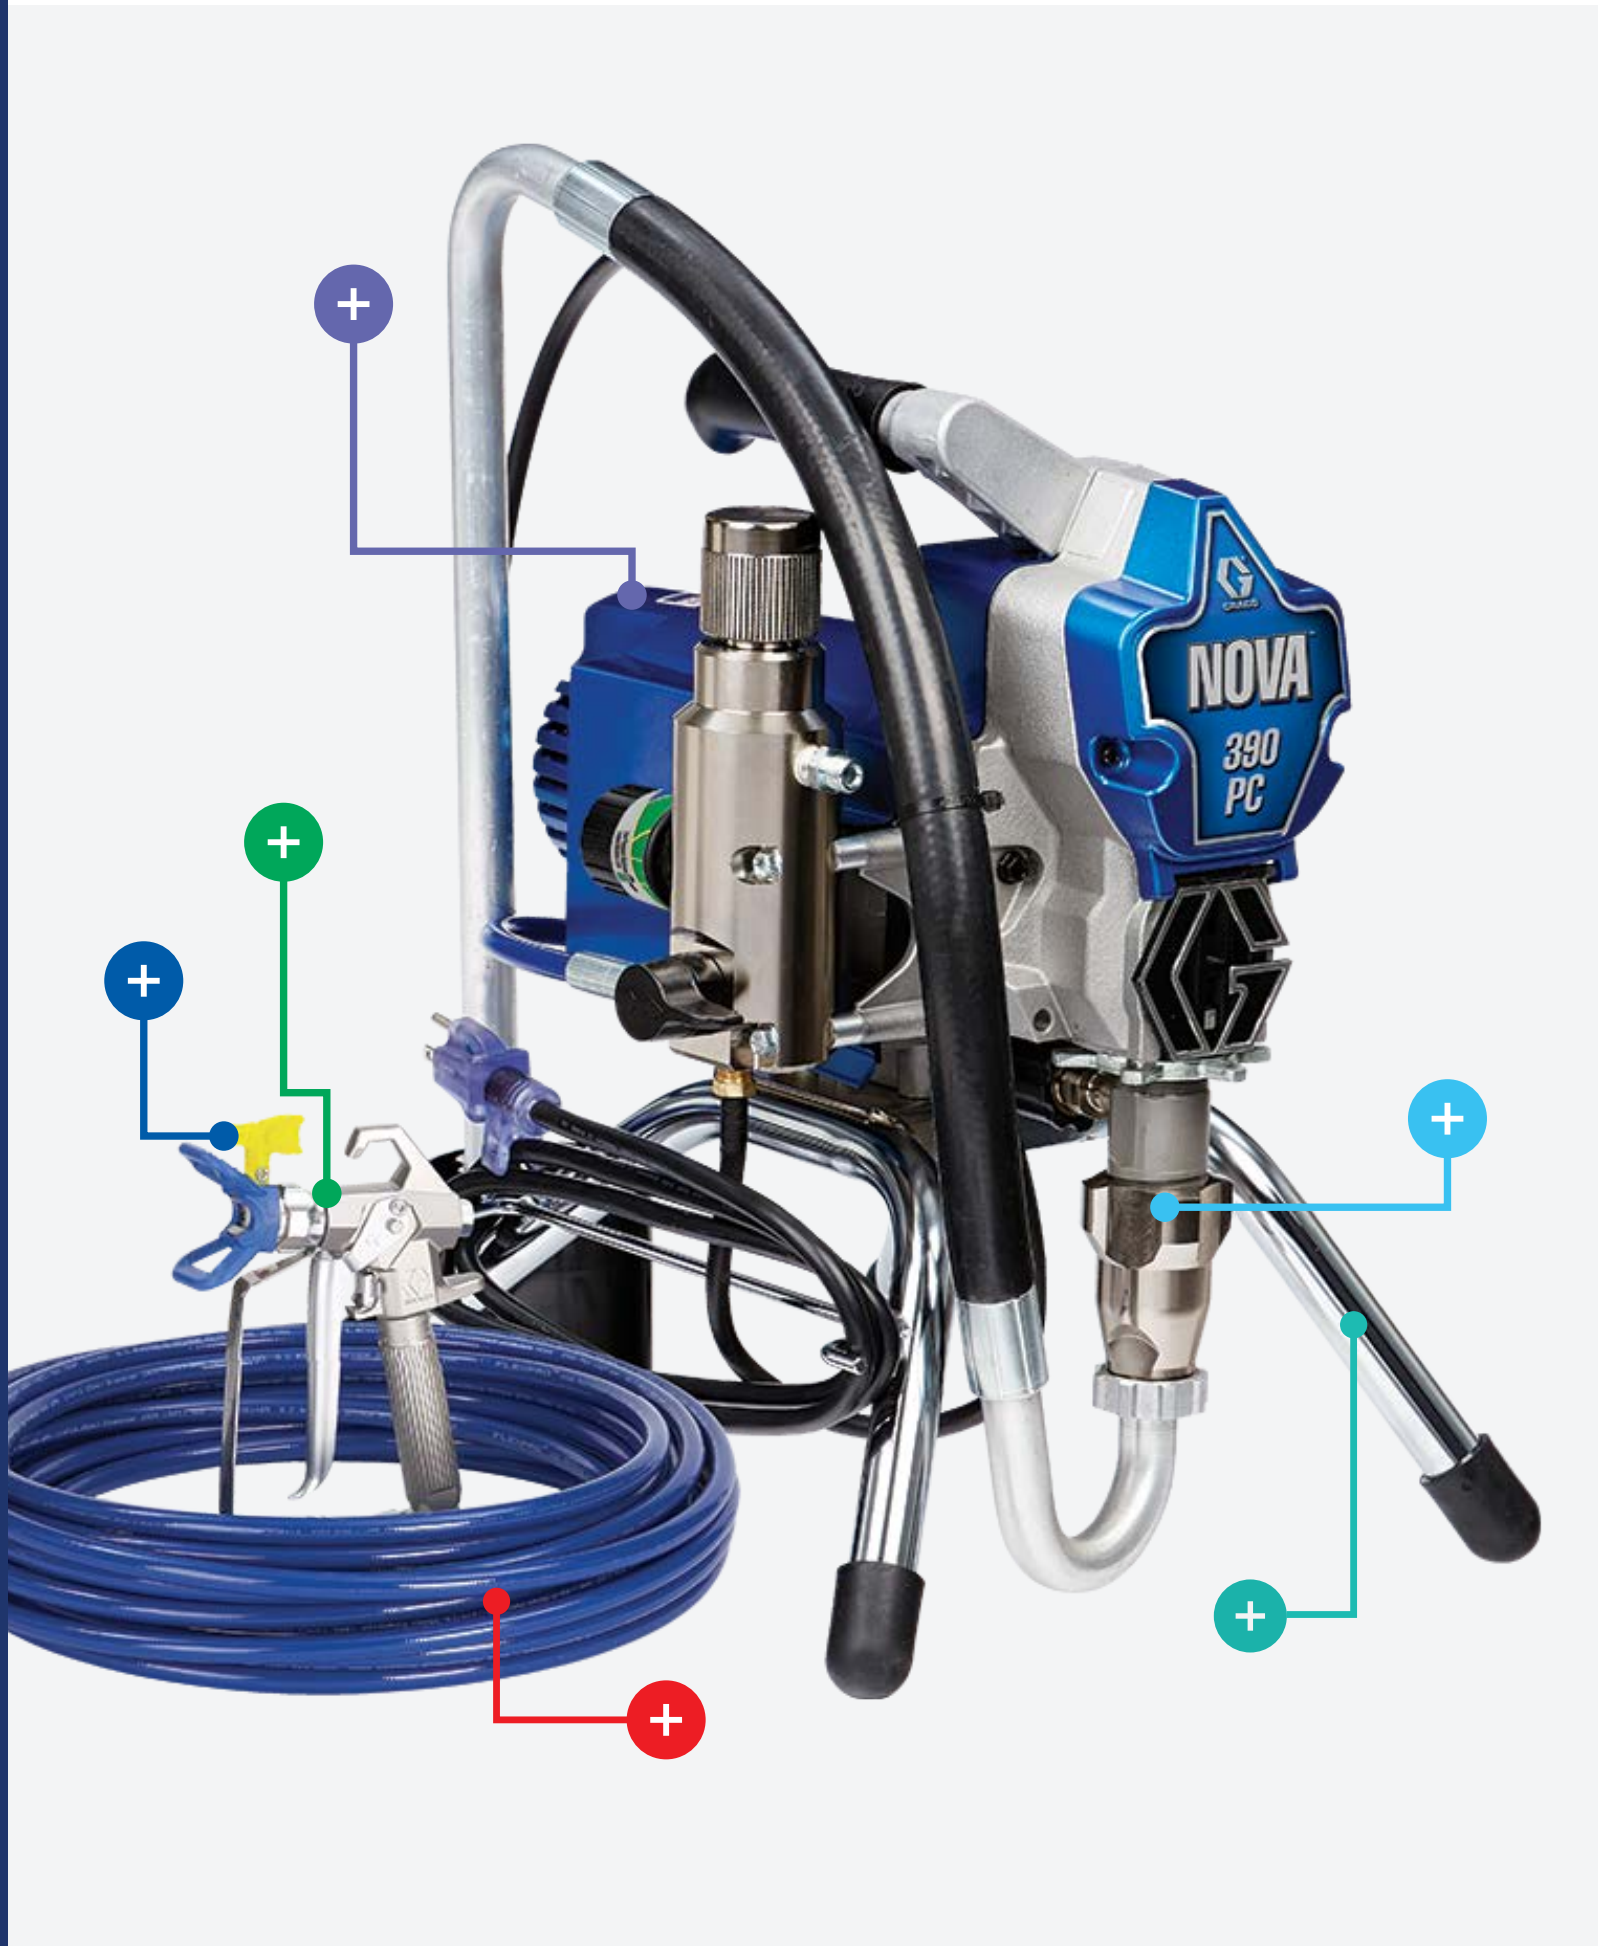

Anatomy of a Sprayer

+ Pump

The pump, or fluid section, is the heart of an airless sprayer. Piston pumps are very popular and contain valves and packings that work with the piston to pressurize paint. These only run when needed, and can handle thicker materials. Diaphragm pumps also use a piston, which moves hydraulic fluid in order to make a diaphragm to pull in paint and push it out the gun — eliminating the need for packings that can need replacement over the sprayer's lifetime.

+ Spray Gun

Every sprayer needs a spray gun, and options range from basic to premium. More advanced spray guns weigh less, require less trigger pressure, and can be adjusted for user comfort to significantly reduce fatigue.

+ Hose

Hose length options range from 50' to 300'. Longer hoses provide excellent flexibility on new residential and commercial jobsites, but take much more material to fill before spraying. Balancing the number of guns, hose length and motor size is an important part of productivity.

+ Motor and Drive System

Electric airless pump motors come in AC, DC and Universal, with DC being the most common and the most forgiving of power fluctuations on the jobsite. As motor size increases, so do the maximum PSI and GPM. Gas engines vary based on volume, measured in cubic centimeters.

+ Tip

Tips have the most impact on the finish. Picking a tip that works with your coating and sprayer is imperative. Using a worn tip causes an uneven finish and lost profit in increased overspray.

+ Chassis

Sprayer configuration impacts its portability and storage requirements. Many pumps come in both high (vertical) and low (horizontal) configurations, both with wheels to make it easy to move. Some smaller pumps are also available in a stand configuration, which is small enough to be carried by hand.

Airless Sprayers











Choosing an Airless Sprayer

Use your answers to the following questions to help narrow your selection as you look through this guide.

What are your power source requirements?



If you have this requirement...	Consider this power source	
I prefer battery-powered technology.	 Battery	See Pages 16 – 17
My jobs require quiet operation.	 Electric	See Pages 16 – 24
I work indoor jobs so I can't have emissions.	 Electric	See Pages 16 – 24
Some of my jobs do not have access to electricity.	 Gas	See Pages 25 – 29
My jobs require portability.	 Gas	See Pages 25 – 29
I need a sprayer capable of very high output.	 Gas	See Pages 25 – 29
I need the versatility of both power sources.	  Convertible	See Pages 25 – 29

How much paint do you spray per week?



The airless sprayers in this guide are organized by gallons per week. Look for your desired productivity to start narrowing your selection.

It's a good idea to allow your business room to grow when you begin considering sprayer capability options.

Consider this:

- What material types will you spray? Now and in the future?
- How many gallons do you currently spray apply per week?
- How much do you spray on your busiest weeks?
- Do you expect this amount to grow in the near future?

What is your maximum crew size?



Choose adequate gun support for your crew size now — and in the near future.

Airless sprayers can support from 1-6 guns, depending on motor size, hose length and paint viscosity. Make sure you account for tip size when thinking through how you'll use multiple guns.

What are your mobility requirements?



Sprayer hose length can range from 50' to 300'. Be sure your hose length can accommodate the way you work.

- If you want to keep the sprayer nearby while you work, a 50' hose will work.
- If you want to move within a building while keeping your sprayer stationary, choose a longer option.

Choosing the Right Spray Tip

The type of paint you are spraying determines your tip size. Choosing the right tip for the job will affect the quality of your finish – and help you save time and money.

Here's how you can easily find the right tip size for the type of paint you plan to spray:

1. By the specific paint you use:

Tip sizes for all Sherwin-Williams paints can be found on their Material Data Sheet. This is true for most paints and coatings.

2. By using the generally recommended tip size:

Refer to the chart below to find the ideal tip.

Type of Paint	Tip Size
Stains	.009 - .015
Lacquers	.011 - .017
Latex-based	.013 - .021
Oil-based	.013 - .017
Block fillers	.019 - .031
Smooth elastomerics	.019 - .035+



+ Tip Size

The numbers represent the tip size and indicate how much paint will flow through the tip.

- 5** The first digit represents half the fan width (5 x 2 = 10-inch fan width).
- 17** The last two digits represent the size of the tip opening in thousandths of an inch.

Good rules of thumb:

Light viscosity coatings


When applying light viscosity coatings, like stains and lacquers, use spray tips with smaller orifice sizes.

Heavy viscosity coatings

For heavier viscosity coatings, like latex, use spray tips with larger orifices.

Count the cost of worn tips

- Worn tips use more paint.
- Worn tips produce uneven and inconsistent coverage.
- Worn tips require more passes and reduce production.
- Worn tips result in a poor-quality finish.

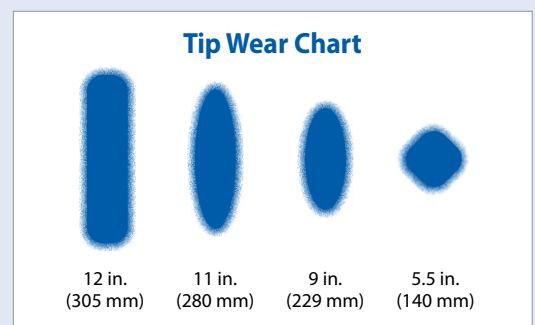









Graco Tip Technology




Example: RAC X LP517



GOOD	BETTER		BEST		
RAC® 5	RAC X™		RAC X™ LOW PRESSURE		
 <p>RAC 5</p>	 <p>LTX</p>	 <p>WIDERAC</p>	 <p>FINE FINISH LOW PRESSURE</p>	 <p>LOW PRESSURE</p>	 <p>WIDERAC LOW PRESSURE</p>
Tip - 286xxx Guard - 243161	Tip - LTXxxx Guard - 246215	Tip - WRxxxx Guard - 246215	Tip - FFLPxxx Guard - 246215	Tip - LPxxx Guard - 246215	Tip - WRLPxxx Guard - 246215
Tip Range - .007 - .065	Tip Range - .007 - .071	Tip Range - .021 - .039	Tip Range - .006 - .016	Tip Range - .013 - .031	Tip Range - .021 - .031
OneSeal: Latex - 243281 Solvent - 224081	OneSeal: Latex - 246453 / Solvent - 248936		OneSeal: Latex - 17P501 Solvent - 17P502	One-Seal: Latex - 17P501 / Solvent - 17P502	
Precision spray tip provides excellent fan pattern life and high-quality finish	Longest-lasting standard pressure tip on the market	Produces a 24" fan pattern to finish the job in half the time	Atomize fine finish materials at half the pressure for an HVLP-like finish	Dial down the pressure for less overspray, longer tip life, and a perfect airless finish	All the benefits of RAC X Low Pressure Tips, now in a 24" fan pattern
Residential, commercial, interior and exterior applications	Residential, commercial, interior and exterior applications	New construction and high production with large surfaces	Trim, molding, cabinets, woodwork, metal	Residential, commercial, interior and exterior applications	New construction and high production with large surfaces
Latex, oil-based paints, elastomeric, block filler	Latex, oil-based paints, elastomeric, block filler		Lacquer, varnish, stain, enamel paint	Latex, oil-based paints, elastomeric, block filler	



Titan Tip Technology

	 HEA™ High Efficiency Airless Tip	 SC-6+ Reversible Airless Tip	 SC-6+ Fine Finish Airless Tip
Typical Applications	Commercial / Residential Interior / Exterior	Commercial / Residential Interior / Exterior	Fine Finishing
Recommended Pressure	800–1200 PSI	1500–5000 PSI	1200–1800 PSI

EXPERIENCE AIRLESS *LIKE NEVER BEFORE*



BREAKTHROUGH XTREME™ TORQUE MOTOR — MANUFACTURED BY GRACO IN THE USA

Unleash the power, precision and control at low RPM without a multistage gear train in the first-ever motor built specifically for airless spray.



UNRIVALED FINISH QUALITY WITH RAPID-RESPONSE PRESSURE CONTROL

Delivers the world's steadiest running pressure. Dial in 10 psi increments with the widest performance range (50-3,300 psi).



SELECTABLE PERFORMANCE WITH THE PUSH OF A BUTTON

Low Pressure Mode: Easily unlock savings on every job using low-pressure technology (50-2,000 psi).

High Pressure Mode: For extended hose lengths and difficult to atomize materials (500-3,300 psi).



ULTIMATE **XT**™





ALL NEW FOR 2024



**ENDURANCE VORTEX® PISTON
PUMP WITH PROCONNECT™**

Spray 3X more gallons with innovative Endurance Vortex Technology. Eliminate Downtime with ProConnect on-the-job Replacement.



**HIGH-VELOCITY
TURBOCLEAN™ SYSTEM**

Clean 3X faster using 1/2 the water.



**QUIETEST SPRAYER
EVER BUILT**

The first thing you'll notice, but it won't be the last — up to 10X quieter!



SEE THE XT DIFFERENCE

graco.com/UltimateXT





BETTER TOOLS. BETTER SUPPORT. BETTER RESULTS.

YOU HAVE A TITAN IN YOUR CORNER. Titan supports your business with a relentless commitment to building sprayers and tools that lead to better work, improved ROI and increased profits.

INNOVATIONS THAT TAKE PRODUCTIVITY TO A NEW LEVEL.



QUAD+ PACKINGS™ / PERMALIFE™ CYLINDER


Self-adjusting and self-compensating packings and no wearable cylinder deliver the longest life and lowest repair costs in the industry.

Available on Impact® Series.



QUICK REMOVAL FLUID SECTION


Easy-access fluid section allows for fast, convenient service anywhere, anytime, without the need for tools.

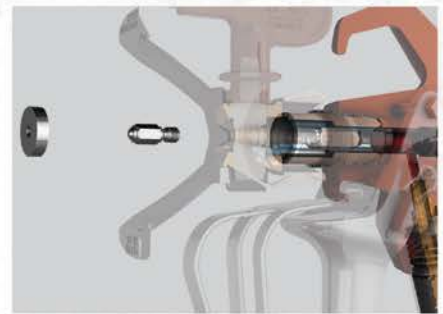

INFINITY PACKING® SYSTEM

Get two times the life by reversing the seat and changing the ball. The spring and needle assembly is isolated from the fluid path, increasing flow and reducing wear.

Available on RX-Pro & RX-Apex.

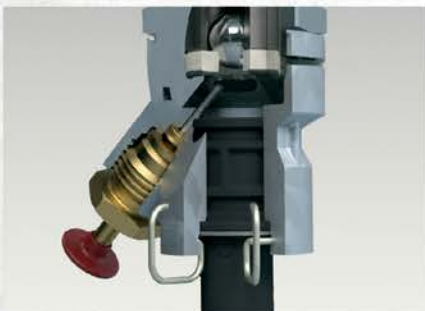

SUREFLO™ PUSHER VALVE

Primes the first time, every time. Unstick the lower ball valve with a push of a button. No need for a hammer.

Available on Impact® 440, 540 & 640, Elite® 3000 & 3500.



MYTITAN® DIGITAL TOOLBOX

MyTitan gives you everything you need to get the most out of your sprayers, all in one place, no matter where the workday takes you.



INTELLISYNC™ TECHNOLOGY

Titan's first Bluetooth® connected pumps combine smart sprayer technology with the MyTitan app to give you ultimate control with features like InCommand Dashboard, TipAware, and ActivGuard™ Theft Protection.



INDUSTRY'S BEST AND LONGEST WARRANTY.

We have confidence in our craftsmanship and are proud to stand behind every product we make.

NEW INNOVATION FOR 2023



IMPACT® X 440

X-TRA POWER X-TRA PERFORMANCE

FEATURING

Logix™ Adaptive Controller

Tip learning technology boosts efficiency

Vertical Filter Housing

No-spill vertical filter cleans 3X faster

Quick Removal Fluid Section

Extremely durable and maximizes uptime

DuraLife™ Brushless HE Motor

Enhanced performance and efficiency

Smart Design

Lightweight compact design with ergonomic adjustable carrying handle



Scan for product details, videos, and resources

GROUNDBREAKING SPRAY TECHNOLOGY FOR ANY APPLICATION



IMPACT® SERIES

Electric Airless Sprayers



ELITE® SERIES

Sealed Hydraulic Airless Sprayers



POWRTWIN™ SERIES

Convertible Electric or Gas Sprayers



CAPSPRAY™

Efficient HVLP Systems



RED SERIES®

Max Comfort, Performance and ROI



SPRAY TIPS

A Tip for Every Application



CA TECHNOLOGIES

Pneumatic and Conventional Spray Equipment



POWRLINER™ SERIES

Sealed Hydraulic Line Striping Sprayers












ROLLER TECHNOLOGY

High Speed Rolling

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	Occasional Use		
	 	 	 
MODEL	GRACO Ultimate™ Airless Handheld – Corded	GRACO Ultimate™ Airless Handheld – Cordless	GRACO Ultimate MX™ Airless Handheld – Cordless
Gallons Per Minute (GPM)	.20	.20	.20
Supports Tip Size*	.016	.016	.016
Maximum Fluid Pressure (PSI)	2000	2000	2000
Weight	4.6 Lbs.	5.3 Lbs.	5.5 Lbs.
Pump Type	Triax™ II Piston Pump with ProConnect™	Triax II Piston Pump with ProConnect™	Triax II Piston Pump with ProConnect™
Motor Size/Type	1/4 HP AC	1/4 HP DC	1/4 HP Brushless DC
Available Models** (See below for model description)	A	B, C	B, C
Frame Mount - High	—	—	—
Frame Mount - Low	—	—	—
Frame Mount - Stand	—	—	—
Guns Supported	—	—	—
CETL Certified	 6509-90054	 1012-94726	 1012-94734

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description
















A Standard

B Includes (2) DEWALT® 20V Max Compact lithium-ion batteries, charger, tool bag, RAC X FFLP SwitchTips™ and FlexLiner™ Bags

C Tool only model includes RAC X FFLP SwitchTip and FlexLiner Bags; DEWALT batteries and charger not included

Electric Airless Sprayers




Sherwin-Williams carries a complete line of accessories. See store for details.

 	 	 	 
GRACO Ultimate™ QuickShot	GRACO MAGNUM® X5	GRACO MAGNUM® ProX17	GRACO MAGNUM® ProX19
.20	.27	.34	.38
.016	.015	.017	.019
2000	3000	3000	3000
6.4 Lbs.	13 Lbs.	27 Lbs.	38 Lbs.
QuickShot ProConnect Piston Pump	Piston	Power-Piston Pump with ProXchange™	Power-Piston Pump with ProXchange™
1/4 HP Brushless DC	1/2 HP Universal	3/4 HP DC	7/8 HP DC
D	A	A	A
—	—	—	 6509-47484
—	—	—	—
—	 6509-47468	 6509-47476	—
—	1	1	1
 6513-13256			

D Includes QuickShot Belt & Holster, (2) DEWALT 20V Compact Lithium Ion Batteries, charger, tool bag and (2) RAC X FFLP SwitchTips

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	11-50 Gallons		
			
MODEL	GRACO NOVA™ 390 PC	GRACO NOVA™ 390 PC Cordless	TITAN Impact® 410
Gallons Per Minute (GPM)	.47	.47	.47
Supports Tip Size*	.021	.021	.021
Maximum Fluid Pressure (PSI)	3300	3300	3100
Weight	33 Lbs.	31 Lbs.	34 Lbs. (Stand)
Pump Type	Endurance Piston Pump with ProConnect	Endurance Piston Pump with ProConnect	Piston
Motor Size/Type	5/8 HP DC	5/8 HP Brushless DC	3/4 HP DCX
Available Models** (See below for model description)	A	B	A
Frame Mount - High	<input checked="" type="checkbox"/> 1005-55648	<input checked="" type="checkbox"/> 1023-40981	<input checked="" type="checkbox"/> 1018-05935
Frame Mount - Low	—	—	—
Frame Mount - Stand	<input checked="" type="checkbox"/> 6508-71536	<input checked="" type="checkbox"/> 1023-29935	<input checked="" type="checkbox"/> 6510-97636
Guns Supported	1	1	1
CETL Certified	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

* Number of guns, tip size, hose length and hose diameter affect fluid pressure





** Model description

A Standard

B Includes (2) DEWALT® 20V Max Compact lithium-ion batteries, charger, tool bag, RAC X FFLP SwitchTips™ and FlexLiner™ Bags

Electric Airless Sprayers
























Sherwin-Williams carries a complete line of accessories. See store for details.

11-50 Gallons	51-75 Gallons		
 <p>COMING SOON</p>		 <p>NEW</p>	
TITAN Impact® X 410	GRACO Ultimate NOVA™ 395 PC	TITAN Impact® X 440	GRACO Ultimate MX II™ 490 PC Pro
.47	.54	.54	.54
.021	.023	.023	.023
3300	3300	3300	3300
30 Lbs. (Stand) 54 Lbs. (High)	42 Lbs. (Stand)	30 Lbs. (Stand)	34 Lbs. (Stand)
Piston	Endurance Piston Pump with ProConnect	Piston	Endurance Piston Pump with ProConnect
1.10 HP Brushless	7/8 HP TEFC DC	1.2 HP DuraLife Brushless DC	1.0 HP MaxPower Brushless DC
A	A	A	C
✓ 1028-37051	✓ 1017-97850	✓ 1028-37044	✓ 1017-97926
—	✓ 1017-97744	—	✓ 6510-97834
✓ 6513-05666	✓ 6510-97644	✓ 6513-05658	✓ 6510-97826
1	1	1	1
✓	✓	✓	✓

C Select PC Pro models include MaxPower Motor, ProConnect, SmartControl with digital display, FastFlush, and Contractor PC gun, hose and tip

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	51-75 Gallons			76-100 Gallons	
	 	 	 	 	 
MODEL	GRACO Ultimate MX II™ 495 PC Pro	TITAN Elite® 3000	GRACO Ultimate 490 XT™	TITAN Impact® 640I	TITAN Impact® 640IA
Gallons Per Minute (GPM)	.60	.60	.70	.70	.70
Supports Tip Size*	.025	.025	.025	.027	.027
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300	3300
Weight	34 Lbs. (Stand)	103 Lbs. (High & Low)	31 Lbs. (Stand)	69 Lbs. (High)	69 Lbs. (High)
Pump Type	Endurance Piston Pump with ProConnect	Sealed Hydraulic	Endurance Vortex Piston Pump with ProConnect	Piston	Piston
Motor Size/Type	1.2 HP MaxPower Brushless DC	1.2 HP DCX	1.3 HP Xtreme Torque Brushless DC	1.55 HP DuraLife Brushless DC	1.55 HP DuraLife Brushless DC
Available Models** (See below for model description)	B	A	E	C	A, D
Frame Mount - High	 1017-97215	 1019-89309	 1029-06229	 1027-12684	 1027-12718
Frame Mount - Low	 1017-97207	 1019-89309	 1029-06211	 1027-12692	 1027-12726
Frame Mount - Stand	 1017-97934	—	1029-06104	 1027-12668	 1027-12700
Guns Supported	1	1	1	1	1
CETL Certified					

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description





A Standard

B Select PC Pro models include MaxPower Motor, ProConnect, SmartControl with digital display, FastFlush, and Contractor PC gun, hose and tip

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

101–150 Gallons

			
TITAN Impact® 740	GRACO Ultimate 495 XT™	GRACO Ultimate MX II™ 650	GRACO Ultimate 650 XT™
.80	.80	.80	.90
.029	.027	.029	.029
3300	3300	3300	3300
87 Lbs. (High)	31 Lbs. (Stand)	77 Lbs.	68 Lbs. (Hi-Boy)
Piston	Endurance Vortex Piston Pump with ProConnect	Endurance Piston Pump with ProConnect	Endurance Vortex Piston Pump with ProConnect
2.0 HP DuraLife Brushless DC	1.7 HP Xtreme Torque Brushless DC	1.8 HP MaxPower Brushless DC	1.9 HP Xtreme Torque Brushless DC
A	E	A	E
<input checked="" type="checkbox"/> 957-6976	<input checked="" type="checkbox"/> 1029-06252	<input checked="" type="checkbox"/> 1020-08729	<input checked="" type="checkbox"/> 1029-06278
—	<input checked="" type="checkbox"/> 1029-06245	<input checked="" type="checkbox"/> 1020-08737	<input checked="" type="checkbox"/> 1029-06260
—	<input checked="" type="checkbox"/> 1029-06237	—	—
2 (.017 Tip)	1	2 (.019 Tip)	2 (.019 Tip)
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>





C IntelliSync Models include TipAware®, ProStart® and the InCommand™ Dashboard

D IntelliSync with ActivGuard™ Models include TipAware®, ProStart®, InCommand™ Dashboard and ActivGuard™ Real-Time GPS

E Xtreme Torque Motor, Endurance Vortex Piston Pump ProConnect, Rapid Response Control with LED Display, Performance Modes, TurboClean, Contractor PC Gun, Hose and RAC X LP SwitchTip

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	151–200 Gallons			
				
MODEL	GRACO Ultimate MX II™ 695	TITAN Impact® 840I	TITAN Impact® 840IA	GRACO Ultimate 695 XT™
Gallons Per Minute (GPM)	.95	1.00	1.00	1.05
Supports Tip Size*	.031	.032	.032	.031
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	93 Lbs. (Hi-Boy)	87 Lbs. (High)	87 Lbs. (High)	87 Lbs. (Hi-Boy)
Pump Type	Endurance Piston Pump	Piston	Piston	Endurance Vortex Piston Pump with ProConnect
Motor Size/Type	2.0 HP MaxPower Brushless DC	2.3 HP DuraLife Brushless DC	2.3 HP DuraLife Brushless DC	2.1 HP Xtreme Torque Brushless DC
Available Models** (See below for model description)	A, B	A, C	D	E, F
Frame Mount - High	✓ Standard 6510-99046	✓ 1027-12734	✓ 1027-12759	Standard 1029-06286 ProContractor 1029-06120
Frame Mount - Low	✓ Standard 6510-99053	✓ 1027-12742	✓ 1027-12676	1029-06112
Frame Mount - Stand	—	—	—	—
Guns Supported	2 (.023 Tip)	2 (.021 Tip)	2 (.021 Tip)	2 (.023 Tip)
CETL Certified	✓	✓	✓	✓

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description A Standard

B ProContractor™ Series includes Endurance Vortex MaxLife Pump, BlueLink, QuikReel, ProConnect 2, Smart Control, Fast Flush, WatchDog, Contractor PC gun, hose and tip
















C IntelliSync Models include TipAware®, ProStart® and the InCommand™ Dashboard

D IntelliSync with ActivGuard™ Models include TipAware®, ProStart®, InCommand™ Dashboard and ActivGuard™ Real-Time GPS

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

151–200 Gallons







			
			
GRACO Ultimate MX II™ 795	TITAN Impact® 1040	TITAN Impact® 1140I	TITAN Impact® 1140IA
1.10	1.15	1.20	1.20
.033	.033	.034	.034
3300	3300	3300	3300
98 Lbs. (Hi-Boy)	98 Lbs.	102 Lbs.	102 Lbs.
Endurance Piston Pump	Piston	Piston	Piston
2.2 HP MaxPower Brushless DC	2.5 HP DuraLife Brushless DC	2.6 HP DuraLife Brushless DC	2.6 HP DuraLife Brushless DC
A, B	A	C	D
 Standard 1017-97264	 1002-45752	 1025-19196	 1025-19204
—	—	—	—
—	—	—	—
2 (.025 Tip)	2 (.022 Tip)	2 (.023 Tip)	2 (.023 Tip)
			

E Standard Series XT — Xtreme Torque Motor, Endurance Vortex Piston Pump ProConnect, Rapid Response Control with LED Display, Performance Modes, TurboClean, Contractor PC Gun, Hose and RAC X LP SwitchTip

F ProContractor Series XT — All Standard Series XT features plus QuickReel, Endurance Vortex Maxlife Pump, Crush Proof Rock Catcher, Smart Display and Bluelink

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	151–200 Gallons		201–500 Gallons
	 	 	 
MODEL	GRACO Ultimate 795 XT™	GRACO Ultimate MX II™ 1095	GRACO Ultimate 1095 XT™
Gallons Per Minute (GPM)	1.20	1.20	1.30
Supports Tip Size*	.033	.035	.037
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	88 Lbs. (Hi-Boy)	120 Lbs. (Hi-Boy)	101 Lbs. (Hi-Boy)
Pump Type	Endurance Vortex Piston Pump with ProConnect	Endurance Piston Pump	Endurance Vortex Piston Pump with ProConnect
Motor Size/Type	2.3 HP Xtreme Torque Brushless DC	2.4 HP MaxPower Brushless DC	2.7 HP Xtreme Torque Brushless DC
Available Models** (See below for model description)	B, C	A	B, C
Frame Mount - High	✓ Standard 1029-06138 ProContractor 1029-06146	✓ Standard 1017-97280	✓ Standard 1029-06153 ProContractor 1029-06161
Frame Mount - Low	—	—	—
Frame Mount - Stand	—	—	—
Guns Supported	2 (.025 Tip)	3 (.021 Tip)	3 (.023 Tip)
CETL Certified	✓	✓	✓

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description











A Standard

B Standard Series XT — Xtreme Torque Motor, Endurance Vortex Piston Pump ProConnect, Rapid Response Control with LED Display, Performance Modes, TurboClean, Contractor PC Gun, Hose and RAC X LP SwitchTip

C ProContractor Series XT — All Standard Series XT features plus QuickReel, Endurance Vortex Maxlife Pump, Crush Proof Rock Catcher, Smart Display and Bluelink

Gas Mechanical Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	50-100 Gallons	76-100 Gallons	101-150 Gallons	500+ Gallons	
	 	 	 	 	 
MODEL	GRACO GMAX™ 3400	TITAN Elite® 3500	GRACO GMAX™ II 3900	GRACO GMAX™ II 5900	GRACO GMAX™ II 7900
Gallons Per Minute (GPM)	.75	.75	1.25	1.60	2.20
Supports Tip Size*	.027	.027	.036	.043	.048
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300	3300
Weight	89 Lbs.	103 Lbs.	109 Lbs. (Hi-Boy)	139 Lbs. (Hi-Boy)	146 Lbs. (Hi-Boy)
Pump Type	Endurance Piston Pump	Sealed Hydraulic	Endurance Piston Pump	Endurance Piston Pump	Endurance MaxLife Piston Pump
Motor Size/Type	120cc Honda or 177cc Kohler	120cc Honda	120cc Honda or 177cc Kohler	200cc Honda or 208cc Kohler	200cc Honda or 208cc Kohler
Electric Conversion Kit	—	—	—	Option	
Available Models** (See below for model description)	A	A	A, B	A, B, C	A, B, C
Frame Mount - High	✓ Honda 1017-97470 Kohler 1024-95611	✓ 1013-13526	✓ Standard Honda 1017-97496 Kohler 1024-95629 ProContractor™ Honda 1017-97504	✓ Standard Honda 1017-97546 Kohler 1024-95637 ProContractor Honda 1017-97553 IronMan™ Honda 1017-97561	✓ Standard Honda 1017-97595 Kohler 1024-80985 ProContractor Honda 1017-97603 IronMan Honda 1017-97611
Frame Mount - Low	—	✓ 1013-13534	✓ Standard Honda 1017-97488	✓ Standard Honda 1017-97512	✓ Standard Honda 1017-97579
Frame Mount - Stand	—	—	—	—	—
Guns Supported	1	1	2 (.023 Tip)	3 (.023 Tip)	4 (.023 Tip)
CETL Certified	—	—	—	✓ Gas/Electric Convertible 1017-97538	—

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description



A Standard

B ProContractor Series includes Endurance Vortex MaxLife Pump, ProConnect 2, QuikReel Hose Management System, LED Display, WatchDog Pump Protection System, Crushproof Rock Catcher, Contractor PC gun, hose and tip

C IronMan Series includes Endurance Vortex MaxLife EXTREME Pump, ProConnect 2, Flatproof Tires, LED Display, WatchDog Pump Protection System, Crushproof Rock Catcher, Contractor PC gun, hose and tip

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	200-500 Gallons		501+ Gallons
			
MODEL	GRACO GH 130	TITAN PowrTwin™ 4900 Plus	GRACO GH 200
Gallons Per Minute (GPM)	1.30	1.50	2.15
Supports Tip Size*	.037	.044	.047
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	150 Lbs.	132 Lbs.	160 Lbs.
Pump Type	Endurance Piston Pump	Hydraulic Piston	Endurance Piston Pump
Motor Size/Type	120cc Honda	160cc Honda	160cc Honda
Electric Conversion Kit	Option	Option	Option
Available Models** (See below for model description)	A	A	A, B
Frame Mount - High	—	—	—
Frame Mount - Low	<input checked="" type="checkbox"/> 1005-55747	<input checked="" type="checkbox"/> 599-4116	<input checked="" type="checkbox"/> Standard 1005-55762 ProContractor™ 1005-55770
Frame Mount - Stand	—	—	—
Guns Supported	2 (.023 Tip)	3 (.025 Tip)	4 (.023 Tip)
CETL Certified	<input checked="" type="checkbox"/> With Optional Electric Conversion Kit	—	<input checked="" type="checkbox"/> With Optional Electric Conversion Kit

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description






A Complete units include gun, hose and tip

B ProContractor Series includes Endurance MaxLife Pump, ProConnect, QuikReel, CrushProof Rock Catcher, gun, hose and tip

Gas Hydraulic Sprayers









Sherwin-Williams carries a complete line of accessories. See store for details.

501+ Gallons

			
TITAN PowrTwin™ 6900 Plus	TITAN PowrTwin™ 6900 Plus DI	GRACO GH 230	TITAN PowrTwin™ 8900 Plus
2.25	2.25	2.35	2.50
.050	.050	.053	.054
3300	3300	3300	3300
139 Lbs.	190 Lbs.	168 Lbs.	154 Lbs.
Hydraulic Piston	Hydraulic Piston	Endurance Piston Pump	Hydraulic Piston
160cc Honda	160cc Honda	200cc Honda	200cc Honda
Option	Option	Option	Option
A	A	A, B	A
—	—	—	—
 599-4124	 117-3137	 Standard 1005-55788 ProContractor™ 1005-55796	 100-1965
—	—	—	—
4 (.025 Tip)	4 (.025 Tip)	5 (.024 Tip)	5 (.024 Tip)
 With Optional Electric Conversion Kit	 With Optional Electric Conversion Kit	 With Optional Electric Conversion Kit	 With Optional Electric Conversion Kit

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	501+ Gallons			
	 	 	 	 
MODEL	GRACO DutyMax GH 675 DI	GRACO GH 933	GRACO GH 300	TITAN PowrTwin™ 12000 Plus DI
Gallons Per Minute (GPM)	1.50	2.50	3.00	3.15
Supports Tip Size*	.041	.053	.057	.058
Maximum Fluid Pressure (PSI)	6750	7250	3300	3600
Weight	218 Lbs.	385 Lbs.	195 Lbs.	194 Lbs.
Pump Type	Endurance Piston Quick Change	Xtreme Piston Quick Change	Endurance Piston Pump	Hydraulic Piston
Motor Size/Type	270cc Honda	390cc Honda	270cc Honda or 305cc Vanguard	270cc Honda
Electric Conversion Kit	—	—	Option	Option
Available Models** <small>(See below for model description)</small>	A	A, C	A, B	A
Frame Mount - High	—	—	—	—
Frame Mount - Low	1015-61710	<input checked="" type="checkbox"/> Bare 1000-22177 Complete 1000-19884	<input checked="" type="checkbox"/> Standard 1005-55804 ProContractor™ 1005-55812	<input checked="" type="checkbox"/> 119-6799
Frame Mount - Stand	—	—	—	—
Guns Supported	5 (.025 Tip)	5 (.023 Tip)	5 (.025 Tip)	6 (.024 Tip)
CETL Certified	—	—	<input checked="" type="checkbox"/> With Optional Electric Conversion Kit	—

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Complete units include gun, hose and tip









B ProContractor Series includes Endurance MaxLife Pump, ProConnect, QuikReel, CrushProof Rock Catcher, gun, hose and tip

C Bare

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

501+ Gallons

 	 	 	 
TITAN PowrTwin™ 12000 Plus	TITAN Hydra™ X 4540	GRACO GH 833	TITAN Hydra™ X 7230
3.15	4.00	4.00	3.00
.058	.067	.065	.057
3600	4500	4000	7250
183 Lbs.	385 Lbs.	350 Lbs.	385 Lbs.
Hydraulic Piston	Hydraulic Piston	Endurance MaxLife Piston Quick Change	Hydraulic Piston
270cc Honda	390cc Honda with Electric Start	390cc Honda	390cc Honda with Electric Start
Option	—	—	—
A	C	A, C	C
—	—	—	—
<input checked="" type="checkbox"/> 599-4157	1024-44841	<input checked="" type="checkbox"/> Bare 1000-22151 Complete 1000-22169	1024-44932
—	—	—	—
6 (.024 Tip)	6 (.021 Tip)	6 (.026 Tip)	5 (.021 Tip)
<input checked="" type="checkbox"/> With Optional Electric Conversion Kit	—	—	—

Spray Guns, Tips and Accessories

We carry a full line of accessories, including gun, hose and tip kits, gun extensions, filters and hoses.



Graco Contractor PC™ Airless Spray Guns

- Lightest, most comfortable mechanical spray guns ever built
- Lightest traditional trigger pull and hold force
- E-Z trigger length adjustment; 2-, 3- or 4-finger length (Contractor PC only)
- Complete gun rebuild in seconds with ProConnect™ replacement cartridge (part# 17Y297)



Graco Contractor® Airless Spray Gun

- Industry standard for performance and durability
- Exclusive FlexSeal design — 70% longer life
- Premium nickel finish for easy cleaning
- Available in 2- or 4-finger trigger
- American made, industry proven Graco quality



Titan RX-Apex™ Spray Gun

- “All-Day” trigger has 30% lighter trigger pull force and over 60% lighter hold force
- FingerPrint+ Grip™ — adjustable grip delivers maximum customization
- Infinity Packing® System means fluid passages contain reversible seat and replaceable ball
- Filtered and non-filtered versions



Titan RX-Pro® Airless Spray Gun

- 2- and 4- finger trigger
- Unique Infinity Packing® offers 2x the life
- Customize the size and fit of the handle with FingerPrint Grip®
- Ultra-light trigger pull decreases fatigue



Graco Contractor FTx® Airless Spray Gun

- Lightweight, smooth trigger pull
- Exclusive FlexSeal design — 70% longer life
- Available in 2- or 4-finger trigger



Titan RX-80™ Spray Gun

- Balanced ergonomic design delivers added comfort
- Convenient built-in filter wrench
- Newly designed packing kit improves performance and increases life



Graco JetRoller™ System

- Combines rolling and spraying into one action, saving time and labor costs
- Ideal for applications that require a backroll finish
- Minimum overspray; minimum prep and cleanup required
- Easily detachable handle for use as pole gun/extension gun
- Uses standard roller covers (not included)



Titan SprayGuide™

- Allows you to effectively cut in while using a spray gun
- Eliminates the need to use a spray shield
- Minimizes cutting in with a brush
- Connects to most airless spray guns



Titan Pro V75 Heat Gun

- Used for paint stripping, paint drying, softening caulk and adhesives, and more
- Versatile, handheld and flameless
- 125–1300 degree temperature range/6-speed fan
- 117 temperature settings

Spray Guns, Tips and Accessories

We carry a full line of accessories, including gun, hose and tip kits, gun extensions, filters and hoses.



ProConnect™ Pump Removal and Installation Systems

- Ability to remove sprayer pump and replace it in seconds
- Eliminates costly jobsite downtime
- Ability to have a spare pump at all times
- One pump fits all small and mid-sized Graco electric sprayers
- Replacement pump sold individually at any Sherwin-Williams store



Pressure Washer Accessories

- At Sherwin-Williams, you'll find a wide assortment of tips, connectors, non-marking hoses and extra guns for pressure washers



Graco RAC X™ Low Pressure (LP and FFLP) SwitchTips

- Spray at up to 50% lower spray pressure, resulting in:
 - *Up to 2X longer tip life*
 - *Up to 50% less overspray*
 - *Easiest pattern overlap*
 - *Reduced prep and cleanup time*
- 46 tip sizes for all applications
- Small sizes for fine finishing applications
- Large sizes for high-volume and heavy-coating applications



Graco RAC X™ SwitchTips

- Premium quality tip
- Tip line includes 107 sizes for every application
- Longest-lasting fan pattern



Graco RAC X™ Wide RAC™ SwitchTips

- Spray double the area in half the time
- Wider fan pattern results in fewer passes
- Ideal for high production and new construction applications



Titan SC-6+ Reversible Tips

- Produces sharper lines with minimal edge feathering so you can spray with fewer passes
- Proprietary carbide formula guarantees highest quality and maximum tip life
- Flow indicator shows if the tip is in spray position or cleaning position. Insertion and knockout tool for simple assembly
- Ergonomic design assures comfort when rotating to spray or reverse position for cleaning
- The SC-6+ fits the universal base size so you do not need to change base assembly



Titan HEA Tips

- Ideal for new residential, residential repaint and commercial applications
- Optimized to atomize paints and coatings at 1000 PSI with no loss in production
- Up to 55% less overspray
- Two times the life of a standard reversible tip
- Longer sprayer life — pump more gallons before repack is needed
- Ideal for all contractors — new to spraying or master painters
- Lower particle velocity but same flow and production rate as higher pressure systems



Titan SC-6+ Fine Finish Tips

- Ideal for lacquers, stains, sealers and clear coats
- Particle size is up to 27% finer than a standard tip
- Fits all industry standard tip guards

*HVLP
and Fine
Finishing*



Choosing an HVLP or Fine Finish Sprayer

Answer the following questions to help find the sprayer that's right for your work — whether you're painting a room or finishing furniture.

What are your productivity needs?



Sprayers in this category range from light duty to high production work.

- **High Volume Low Pressure (HVLP) sprayers** are designed for small detailed work that requires the highest-quality finish.
- **Air-Assisted Fine Finishing sprayers** are designed for larger jobs that demand a high-quality finish.

Light Duty	HVLP
Medium Duty	HVLP
Heavy Duty	HVLP
High Production	Air-Assisted Fine Finishing

What type of paint do you spray?



Not all HVLP sprayers are equipped to handle thick latex paint because of their lower pressure.

ALL HVLP/Fine Finishing sprayers can be used

SOME HVLP/Fine Finishing sprayers can be used



Stains



Lacquers



Alkyds






Latex based

Verify the capabilities of your model

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Medium		Heavy
			
MODEL	TITAN Capspray® X 80	GRACO FinishPro™ HVLP 7.0	TITAN Capspray™ 95
Motor	3 Stage Turbine	3 Stage Turbine	4 Stage Turbine
Maximum Atomization Pressure (PSI)	8.00	7.00	9.50
CFM	N/A	N/A	N/A
Weight	12 Lbs.	18 Lbs. (Standard Series)	22.5 Lbs.
Cart	N/A	N/A	Power Cart Accessory
Available Models* <small>(See below for model description)</small>	A	A, B	A
Cup/Pot Capacity	1 Qt. Cup with Rotating Pick-Up Tube	1 Qt. FlexLiner™ Cup	1 Qt. Cup with Rotating Pick-Up Tube
Compressor	Not Required for 2 Qt. Remote	N/A	Not Required for 2 Qt. Remote
Stains, Lacquers	☑	☑	☑
Alkyd-Based Paints	☑	☑	☑
Latex-Based Paints	☑	☑	☑
Sales Number	1028-86066	Standard 1012-94643 ProContractor™ 1012-94684	572-7243
CETL Certified	☑	☑	☑

* Model description

A Complete units include gun, hose and cup/pot

B ProContractor Series includes Edge® II Plus Gun, Smart Start™, TurboControl, Dual Air Filtration, Utility Box, Super-Flex™ Hose and FlexLiner Bag System

C ProComp Series includes all ProContractor Series features plus: 2-Quart Remote Cup, On-Board Air Compressor, Air Hose and Material Hose

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

High Production



GRACO
FinishPro™ HVLP 9.0

GRACO
FinishPro™ HVLP 9.5

TITAN
Capspray™ 105

4 Stage Turbine

5 Stage Turbine

5 Stage Turbine

9.00

9.50

10.50

N/A

N/A

N/A

19 Lbs. (Standard Series)

26 Lbs. (ProContractor™ Series)

23.5 Lbs.

N/A

N/A

Power Cart
Accessory

A, B

A, B, C

A

1 Qt. FlexLiner™ Cup

1 Qt. FlexLiner Cup

1 Qt. Cup with Rotating Pick-Up Tube

N/A

ProComp – Yes

Not Required for
2 Qt. Remote



Standard
1012-94676
ProContractor
1012-94692


ProContractor
1012-94700
ProComp
1012-94718

Maxum Elite Gun
1005-44089



HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	High Production			
				
MODEL	TITAN Capspray™ 115	TITAN ED655 Plus	GRACO FinishPro™ GX 19 Airless	GRACO FinishPro™ GX 19 Airless Cordless
Motor	6 Stage Turbine (2 Speed)	1/2 HP, TEFC	1/2 HP DC	1/2 HP Brushless DC
Maximum Atomization Pressure (PSI)	11.50	2800 .33 GPM/ .017 Airless Tip Size	3000 .38 GPM/ .019 Airless Tip Size	3000 .38 GPM/ .019 Airless Tip Size
CFM	N/A	N/A	N/A	N/A
Weight	24 Lbs.	27 Lbs.	31 Lbs.	29 Lbs.
Cart	Power Cart Accessory	N/A	Stand	Stand
Available Models* (See below for model description)	A	A	B	C
Cup/Pot Capacity	1 Qt. Cup with Rotating Pick-Up Tube	1.5 Gal. Hopper	1.5 Gal. Hopper	1.5 Gal. Hopper
Compressor	Not Required for 2 Qt. Remote	N/A	N/A	N/A
Stains, Lacquers	☑	☑	☑	☑
Alkyd-Based Paints	☑	☑	☑	☑
Latex-Based Paints	☑	☑	☑	☑
Sales Number	Maxum Elite Gun 1005-44097	868-8244	1006-65009	1025-32686
CETL Certified	☑	☑	☑	☑

*Model description

A Complete units include gun, hose and cup/pot



B Complete unit includes gun, hose and Fine Finish Low Pressure SwitchTip

C Complete unit includes Contractor™ PC Compact gun, hose, Fine Finish Low Pressure SwitchTip™, (2) DEWALT® 60VMAX FlexVolt 6.0 ah Batteries and Fan-Cooled Fast Charger

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

Air-Assisted Fine Finishing

			
TITAN AirCoat	GRACO FinishPro™ 395 PC	TITAN MultiFinish™ 440	GRACO FinishPro™ 595 PC
1/2 HP, TEFC	7/8 HP TEFC DC	7/8 HP DCX	1.6 HP MaxPower™ Brushless DC
2800 .35 GPM/ .017 Airless/ .017 Air-Assisted Tip Size	3300 .47 GPM/ .023 Airless	3300 .54 GPM/ .023 Airless/.023 Air-Assisted Tip Size	3300 0.7 GPM/ .027 Airless
3.2 @ 35 PSI	3.2 @ 35 PSI	3.2 @ 35 PSI	3.2 @ 35 PSI
56 Lbs.	107 Lbs.	92 Lbs.	108 Lbs.
N/A	Hi-Boy	High Rider	Hi-Boy
A	B	A	B
1.5 Gal. Hopper	1 or 5 Gal. Direct Immersion	1 and 5 Gal. Suction Set	1 or 5 Gal. Direct Immersion
5/8 HP	1 HP SmartComp	7/8 HP DCX	1 HP SmartComp
☑	☑	☑	☑
☑	☑	☑	☑
☑	☑	☑	☑
220-7660	1005-55622	573-4066	1017-97249
☑	☑	☑	☑

Striping Equipment



Selecting the Right Striping Equipment

Line strippers produce precise lines on surfaces like parking lots, roads and athletic fields. Use this guide to choose equipment to complete your striping job quickly and efficiently.

What application do you need it for?




If you do this type of work...	Choose this type of striping equipment	
Spraying standard materials, like waterborne paint	Line Strippers	See Pages 41 – 45
Removing lines from roads and parking lots	Pavement Specialty Products	See Page 46 – 49
Thermoplastic “hot” applied striping	Specialty Thermoplastic Strippers	See Page 47
Traffic tape applications	Traffic Tape Applicator	See Page 48



Here's why thermoplastic and traffic tapes are becoming the preferred line striping methods for DOTs all around the USA:



Long-lasting lines:
Up to 5 times longer than alternatives



Safe: Retroreflectivity is built into the material



Profit: More profit per foot than most alternative methods



Simple to use:
Short learning curve = long-lasting knowledge for operators

Striping Equipment

What is the size of your typical striping job?



Stripers in this category range from light duty to heavy duty. Choose the right capability to help ensure your machine has enough flow to complete your projects quickly.




Light Duty

Small parking lots (20–30 lines), athletic fields



Medium Duty

Medium parking lots (40–100 lines)

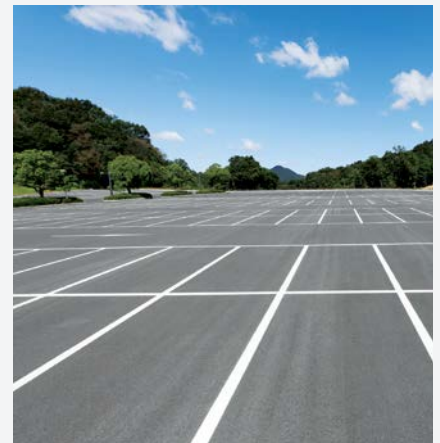

Heavy Duty


Large parking lots (airports, shopping centers), highways

Do you need a striper for indoor use?




When you need your line striper for indoor use, the power source is an important element.

There are two types of engines that can power a line striper: a gasoline engine and an electrical engine.








For **indoor** environments, use an **electrical or battery-powered unit**.



For **outdoor** environments, use **gasoline OR electrical** engines.

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Light				
					
MODEL	GRACO FieldLazer™ ES100	GRACO FieldLazer™ S100	GRACO ES500 Stencil	TITAN PowrLiner™ 850	GRACO LineLazer® ES500
Motor	DEWALT® 6.0 Ah FlexVolt® Battery Electric Motor	35cc Honda	DEWALT 6.0 Ah FlexVolt Battery Electric Motor	37.7cc 4-Stroke Gas Engine	DEWALT 9.0 Ah FlexVolt Battery Electric Motor
Gallons Per Minute (GPM)	.50	.50	.47	.33	.47
Supports Tip Size*	.021	.021	.021	.021	.021
Maximum Fluid Pressure (PSI)	900	900	3300	3000	3300
Weight	75 Lbs.	80 Lbs.	31 Lbs.	65 Lbs.	120 Lbs.
Pump Type	ProXChange™ Power-Piston Pump	Piston	Endurance Piston Pump with ProConnect	Piston	Endurance Piston Pump with ProConnect
Guns Supported	1	1	1	1	1
Sales Number	1025-33676	993-7855	1025-37388	100-1981	1025-34633

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers









Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Light			Medium
	 	 	 	 
MODEL	GRACO LineLazer® ES 1000 Lithium	GRACO LineLazer® 3400	TITAN PowrLiner™ 3500	GRACO LineLazer® V ES 2000 Lithium
Motor	1.2 HP Brushless DC	120cc Honda	120cc Honda	2.2 HP Brushless DC
Gallons Per Minute (GPM)	.60	.75	.75	1.10
Supports Tip Size*	.025	.027	.027	.033
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	300 Lbs.	160 Lbs.	192 Lbs.	350 Lbs.
Pump Type	Endurance Piston Pump with ProConnect	Endurance Piston Pump	Sealed Hydraulic	Endurance Piston Pump
Guns Supported	1	1	1	2 (.025 Tip)
Sales Number	1-Battery, 1-Gun 1025-33676	1012-94742	1-Gun 1013-13542	2-Gun (Mechanical) 1025-37412 HP Automatic Series Available 2-Gun (2 Automatic) 1025-35341

*Number of guns, tip size, hose length and hose diameter affect fluid pressure







Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Medium			Heavy
			
			
TITAN PowrLiner™ 4955	GRACO LineLazer® V 3900	GRACO LineLazer® 130HS	GRACO LineLazer® V 5900
120cc Honda	120cc Honda GX	120cc Honda GX	120cc Honda GX
1.25	1.25	1.30	1.60
.034	.036	.037	.043
3300	3300	3300	3300
324 Lbs.	230 Lbs.	260 Lbs.	250 Lbs.
Hydraulic Piston	Endurance Piston Pump	Endurance Piston Pump	Endurance Piston Pump
2 (.025 Tip)	2 (.025 Tip)	2 (.027 Tip)	2 (.029 Tip)
2-Gun 1005-56190	2-Gun (Mechanical) 1006-64812 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64820 2-Gun (2 Automatic) 1006-64838 LineDriver Models Available LDHD-160-6110 LD-160-6102	2-Gun 599-4918 LineDriver Models Available LDHD-160-6110 LD-160-6102	2-Gun (Mechanical) 1006-64846 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64853 2-Gun (2 Automatic) 1006-64861 LineDriver Models Available LDHD-160-6110 LD-160-6102

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy		
	 	 	 
MODEL	GRACO LineLazer™ V 200HS	GRACO LineLazer™ V 200DC	GRACO LineLazer™ V 250SPS
Motor	200cc Honda GX	200cc Honda GX	390cc Honda GX
Gallons Per Minute (GPM)	2.15	2.15	2.50
Supports Tip Size*	.047	.047	.055
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	277 Lbs.	340 Lbs.	600 Lbs.
Pump Type	Endurance Piston Pump	Endurance Piston Pump	Endurance Piston Pump
Guns Supported	2 (.034 Tip)	2 (.034 Tip)	2 (.039 Tip)
Sales Number	Standard Series 1006-64879 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64887 2-Gun (2 Automatic) 1006-64895 LineDriver Models Available LDHD-160-6110 LD-160-6102 HP Reflective Series Available 2-Gun (2 Automatic) 1 Pressurized Bead Tank Installed 1006-64903	Standard Series 1017-97751 HP Automatic Series Available 2-Gun (Automatic) 1017-97769 HP Reflective Series Available 2-Gun 1 Pressurized Bead Tank Installed 1017-97777	HP Automatic Series Available 1006-64911 HP Reflective Series Available 2-Gun (2 Automatic) 1 Pressurized Bead Tank Installed 1006-64937 2-Gun (2 Automatic) 2 Pressurized Bead Tanks Installed 1006-64929

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Heavy



GRACO
LineLazer™ V 250DC

TITAN
PowrLiner™ 6955

TITAN
PowrLiner™ 8955

390cc
Honda GX

160cc Honda
Electric Start

200cc Honda
Electric Start

2.50

2.10

2.50

.055

.047

.054

3300

3300

3300

864 Lbs.

339 Lbs.

339 Lbs.

Endurance Piston Pump

Hydraulic Piston

Hydraulic Piston

5 (.021 Tip)

2 (.031 Tip)

2 (.038 Tip)

HP Automatic
Series Available

2-Gun
(2 Automatic)
1006-64945

3-Gun
(3 Automatic)
1006-64952

HP Reflective
Series Available

2-Gun
(2 Automatic)
2 Pressurized
Bead Tanks
Installed
1006-64960












3-Gun
(3 Automatic)
2 Pressurized
Bead Tanks
Installed
1006-64978

2-Gun
1005-56208

2-Gun
1005-56216

Pavement Specialty



Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Ride-On Attachment					
						
						
MODEL	GRACO LineDriver®	TITAN LazyLiner™ Pro	TITAN LazyLiner Elite	GRACO LineDriver HD	GRACO LineDriver HD with Electric Start	GRACO LineDriver ES Lithium
Operating Speed	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 12 mph (19 km/h); Reverse up to 7 mph (11 km/h)	Forward up to 12 mph (19 km/h); Reverse up to 7 mph (11 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)
Fuel Capacity	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	3 Lithium Batteries (10-Hour Run Time)
Motor	160cc Honda GX	160cc Honda	200cc Honda	200cc Honda GX	203cc Vanguard	Electric Lithium Powered Battery
Engine Starting System	Manual Pull	Manual Start	Electric Start	ProStart System	Electric Start	Auto Start
Tires	Tubeless Pneumatic 16" L x 4" W	16" L x 4.5" W	16" L x 6.5" W	Tubeless Pneumatic 16" L x 5.5" W	Tubeless Pneumatic 16" L x 5.5" W	Tubeless Pneumatic 16" L x 5.5" W
Weight	265 Lbs.	260 Lbs.	280 Lbs.	275 Lbs.	280 Lbs.	355 Lbs.
Sales Number	160-6102	1001-78177	1001-78169	160-6110	1025-33510	1025-37057

Application	Thermoplastic Striper		
	 	 	 
MODEL	GRACO ThermoLazer™ 200TC	GRACO ThermoLazer™ 300TC	GRACO ThermoLazer™ ProMelt™
Exterior Construction	Steel	Aluminum	Aluminum
Fuel Source	LP Gas, 20 Lbs.	LP Gas, 20 Lbs.	LP Gas, 20 Lbs.
Main Burners	Single Burner/ 30,000 BTU	Twin Burner/ 30,000 BTU	Twin Burner/ 100,000 BTU
Temperature Control	Thermostat	Thermostat	Thermostat
Die Heater	Direct Burners	Direct Burners	Direct Burners
Direction Control	Locking Rear Caster	Locking Front Swivel Wheel	Locking Front Swivel Wheel
Bead Dispenser	No-Tool Variable Width and Flow Rate Double Drop Kit Available	No-Tool Variable Width and Flow Rate Double Drop Kit Available	No-Tool Variable Width and Flow Rate Double Drop Kit Available
Bead Reservoir	40 Lbs. (18 kg)	90 Lbs. (40 kg)	90 Lbs. (40 kg)
Weight	260 Lbs. (118 kg)	295 Lbs. (133 kg)	345 Lbs. (157 kg)
Material Capacity	200 Lbs. (91 kg)	300 Lbs. (136 kg)	300 Lbs. (136 kg)
Melt Time (300 Lbs.)	Up to 2.5 Hours	Up to 4.5 Hours	1 to 1.5 Hours
Temperature Limit Control	N/A	N/A	475° Switch
Sales Number	1004-30073	569-6307	938-9909

Pavement Specialty

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Traffic Tape Applicator
	 
MODEL	GRACO TapeLazer™ HP Automatic
Motor	160cc Honda
Operating Speed	6 mph (10 km/h)
Max. Tape Width	14"
Tape Type	Permanent & Temporary
Cutting	Push Button
Weight	500 Lbs.
Sales Number	1023-51897

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Line Removal			
	 	 	 	 
MODEL	GRACO GrindLazer™ Standard DC89 G	GRACO GrindLazer™ PRO DC89 G	GRACO GrindLazer™ HP DC1013 G	GRACO GrindLazer™ HP DC1021 G DCS
Max Working Width	8" (20 cm)	8" (20 cm)	10" (25 cm)	10" (25 cm)
Engine	270cc Honda GX	270cc Honda GX	390cc Honda GX	21 HP Vanguard
Engine Start	Pull Start	Pull Start	Pull Start	Electric Start
Rear Tires	Solid Rubber	Solid Rubber	Pneumatic Air Filled	Pneumatic Air Filled
Front Tire	Solid Rubber	Solid Rubber	Pneumatic Air Filled, Swivel	Pneumatic Air Filled, Swivel
Drive Belt	Triple Drive Belt	Heavy-Duty HTD Belt	3-Cog Belt	3-Cog Belt
Cut Direction	Forward	Forward	Forward	Reverse
Cut Depth Adjustment	Manual Lever	Manual Dial	Manual Dial	Electronic
Weight	160 Lbs. (73 kg)	190 Lbs. (86 kg)	310 Lbs. (141 kg)	360 Lbs. (163 kg)
LineDriver	No	No	Option	Required
Applications	Light Traffic Marking Removal, Trip Hazards	Traffic Paint, Thermoplastic, Epoxy, Trip Hazards	Traffic Paint, Thermoplastic, Epoxy, Trip Hazards	Inlay Grooving, Traffic Paint, Thermoplastic, Epoxy
Removal Rate	Walking – 400 Sq. Ft./Hr.	Walking – 400 Sq. Ft./Hr.	Walking – 800 Sq. Ft./Hr. LineDriver – 1,700 Sq. Ft./Hr.	LineDriver – 2,100 Sq. Ft./Hr.
Sales Number	1016-98157	1017-97785	1017-97819	1017-97827

Pressure Washers



Choosing a Pressure Washer

Whether you're preparing a surface to be painted or giving it a serious cleaning, a pressure washer will get the job done. Consider the following questions to help select the washer that best meets your needs.

How many hours per week will you use it?




There are two types of pressure washer pumps: belt drive and direct drive pumps. Your choice will largely depend on your weekly usage.

If your usage is...	Consider this type of pressure washer	
Less than 30 hours per week	Direct drive	See Pages 52 – 53
30+ hours per week	Belt drive	See Pages 54 – 55

How much cleaning power will you need?





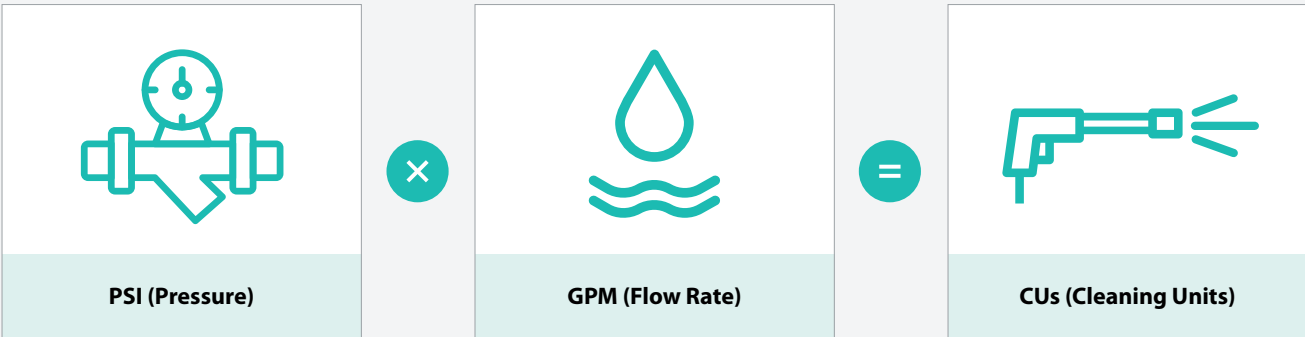












CUs are a useful measurement for comparing models. The higher the number of cleaning units, the more cleaning power your pressure washer has — which ultimately means less cleaning time.



Direct Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.







Water Temperature and Usage	Cold (10–30 Hrs./Week)				Cold (20–30 Hrs./Week)
					
					
MODEL	MI-T-M ChoreMaster® 3200	MI-T-M Work Pro® 3200	MI-T-M ChoreMaster® 4200	MI-T-M Work Pro® 4200	MI-T-M Job Pro® 3000
Maximum (PSI)	3200	3200	4200	4200	3000
Gallons Per Minute (GPM)	2.40	2.40	3.40	3.40	3.00
Usage	10–15 Hrs./Week	15–20 Hrs./Week	10-15 Hrs./Week	15-20 Hrs./Week	20–30 Hrs./Week
Pump Manufacturer	Mi-T-M Pump	Mi-T-M Pump	Mi-T-M Pump	Mi-T-M Pump	AR Pump
Engine	212cc Mi-T-M OHV	196cc Honda OHV	420cc Mi-T-M OHV	389cc Honda OHV	270cc Honda OHV
Cleaning Units (CUs) (PSI x GPM)	7680 CUs	7680 CUs	14280 CUs	14280 CUs	9000 CUs
Net Weight	85 Lbs.	85 Lbs.	142 Lbs.	142 Lbs.	105 Lbs.
Frame	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Lightweight Aluminum
Pressure Relief Start					
Sales Number	6509-90369	6509-90450	6509-90435	6509-90468	1000-79094

Pressure Washer Rental Program

Sherwin-Williams offers a pressure washer rental program in select stores. The rental unit is a Mi-T-M cold water, direct drive 2700 PSI pressure washer powered by a 196cc Honda engine. The pressure washer can be rented for a half day or full day at competitive rates.









Direct Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Cold (20–30 Hrs./Week)					Hot (20–30 Hrs./Week)
					
					
MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M HSP 3500
4000	4000	4000	4000	4000	3500
3.50	4.00	3.50	4.00	4.00	3.30
20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week
Mi-T-M Pump with Bolt-on Unloader	General Pump with External Bypass Unloader	Mi-T-M Pump with Bolt-on Unloader	General Pump with External Bypass Unloader	CAT Pump with External Bypass Unloader	AR Pump with External Bypass
420cc Mi-T-M OHV	420cc Mi-T-M OHV	389cc Honda OHV	389cc Honda OHV	389cc Honda OHV	389cc Honda OHV
14000 CUs	16000 CUs	14000 CUs	16000 CUs	16000 CUs	11550 CUs
125 Lbs.	125 Lbs.	125 Lbs.	125 Lbs.	125 Lbs.	428 Lbs.
Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Powder Coated Steel
✓	✓	✓	✓	✓	—
6512-64087	1024-97492	6511-57224	1000-76728	1020-51133	906-9782

Belt Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Water Temperature and Usage	Hot (40+ Hrs./Week)	Cold (10-15 Hrs./Week)	Cold (30-40 Hrs./Week)	
	 	 	 	 
MODEL	MI-T-M HS 3500	MI-T-M ChoreMaster® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000
Maximum (PSI)	3500	4000	4000	4000
Gallons Per Minute (GPM)	5.60	3.40	4.00	4.00
Usage	40+ Hrs./Week	10-15 Hrs./Week	30-40 Hrs./Week	30-40 Hrs./Week
Pump Manufacturer	General Pump with External Bypass	AR Pump	General Pump with External Bypass	General Pump with External Bypass
Engine	688cc Honda OHV Electric Start	420cc Mi-T-M OHV	420cc Mi-T-M OHV	389cc Honda OHV
Cleaning Units (CUs) (PSI x GPM)	19600 CUs	13600 CUs	16000 CUs	16000 CUs
Net Weight	760 Lbs.	195 Lbs.	165 Lbs.	165 Lbs.
Frame	Powder Coated Steel	Powder Coated Steel	Lightweight Aluminum	Lightweight Aluminum
Pressure Relief Start	—	☑	☑	☑
Sales Number	599-4983	916-2157	1024-97500	1000-76751


Pressure Washer Rental Program

Sherwin-Williams offers a pressure washer rental program in select stores. The rental unit is a Mi-T-M cold water, direct drive 2700 PSI pressure washer powered by a 196cc Honda engine. The pressure washer can be rented for a half day or full day at competitive rates.

Belt Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Cold (40+ Hrs./Week)

				
MI-T-M Job Pro® 4000	MI-T-M Premium 5000	MI-T-M Premium 5000	MI-T-M Premium 6000	MI-T-M Premium 7000
4000	5000	5000	6000	7000
3.70	4.00	4.00	3.70	3.80
30–40 Hrs./Week	40+ Hrs./Week	40+ Hrs./Week	40+ Hrs./Week	40+ Hrs./Week
CAT Pump with External Bypass Unloader	AR Pump with External Bypass	General Pump with External Bypass	General Pump with External Bypass	General Pump with External Bypass
389cc Honda OHV	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start
14800 CUs	20000 CUs	20000 CUs	22200 CUs	26600 CUs
156 Lbs.	433 Lbs.	449 Lbs.	449 Lbs.	449 Lbs.
Lightweight Aluminum	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel
✓	—	—	—	—
1020-51141	1000-76777	1000-76785	1000-76801	1007-14286

*Texture
Sprayers
and Air
Compressors*



Choosing a Texture Sprayer

Texture finishing continues to grow in popularity. From interior knock-down to exterior finishing, the right equipment will make you more productive.

What materials are you spraying?




Texture sprayers are a great example of the amazing things you can accomplish with a coating. From simulated acoustics to textured elastomerics, the material you are spraying will play a large part in the equipment you choose.



Decorative Interior Texture



Exterior Textured Acrylics and Elastomerics

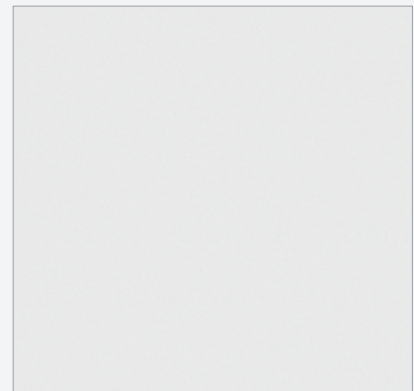

Skim Coat and Level 5

What are your productivity requirements?



Find equipment for everything from small touch-ups to large commercial jobs. Once you've chosen the appropriate material, narrow your selection based on light, medium and heavy-duty production needs.

Light Duty



Small touch-ups

Medium Duty



Regular use over larger areas

Heavy Duty



Heavy-duty production jobs

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Light			
				
MODEL	WAGNER PowerTex®	WAL-BOARD TOOLS Spray-Pro® Hopper Gun	GRACO TexSpray™ FastFinish Pro Texture Spray System	GRACO TexSpray™ FastFinish Standard Texture Spray System
Maximum (PSI)	4	Based on External Compressor	60	60
Gallons Per Minute (GPM)	Based on Material	Based on External Compressor	Based on Material	Based on Material
Maximum Hose Length	N/A	N/A	150 Ft.	150 Ft.
Motor	1 Stage Turbine	N/A	120V 9 SCFM @ 40 PSI Integrated Air Compressor	120V 9 SCFM @ 40 PSI Integrated Air Compressor
Weight	5.5 Lbs.	4.0 Lbs.	68 Lbs.	68 Lbs.
Materials Sprayed	Simulated Acoustics and Drywall Mud	Simulated Acoustics and Drywall Mud	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings
Typical Applications	Small Area and Touch-up Applications	Small Area and Touch-up Applications	Residential, Commercial Interiors and Exteriors	Residential, Commercial Interiors and Exteriors
Sales Number	120-0336	125-0679	1015-61660	1015-61678
CETL Certified	☑	—	☑	☑







Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Light		Medium	
			
GRACO TexSpray™ FastFinish Pressurized Hopper Gun	GRACO TexSpray™ G-Tex Gravity Fed Hopper Gun	GRACO TexSpray™ RTX™ 1400SI	GRACO TexSpray™ RTX™ 2000PI
100	100	70	70
Based on Material	Based on Material	1.40	2.0
N/A	N/A	25 Ft.	50 Ft.
N/A	N/A	1.7 HP AC	1.7 HP AC
4 Lbs.	4 Lbs.	63 Lbs.	70 Lbs.
Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Acrylics and Drywall Mud	Simulated Acoustics, Acrylics and Drywall Mud
Residential, Commercial Interiors and Exteriors	Residential, Commercial Interiors and Exteriors	Residential and Light Commercial Interiors	Residential and Light Commercial Interiors
1015-61694	1015-61702	1006-65017	1006-65025
—	—	☑	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy		
	 	 	 
MODEL	GRACO Mark IV HD 3-in-1	TITAN Impact® 1040T	GRACO Mark IV XT™ HD 3-in-1
Maximum (PSI)	3300	3300	3300
Gallons Per Minute (GPM)	1.10	1.15	1.20
Maximum Hose Length	300 Ft.	300 Ft.	300 Ft.
Motor	2.2 HP Brushless DC	2.5 HP Duralife Brushless DC	2.3 HP Xtreme Torque Brushless DC
Weight	108 Lbs.	107 Lbs.	93 Lbs. (Hi-Boy)
Materials Sprayed	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomers, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomers, Epoxies, Drywall Mud, Intumescent Fireproofing and Other High Build Materials
Typical Applications	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors
Sales Number	Standard 1017-97389	1020-62668	Standard 1029-06179 ProContractor™ 1029-06187
CETL Certified	☑	☑	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Heavy



GRACO
Mark V HD 3-in-1

GRACO
Mark V XT™ HD 3-in-1

GRACO
TexSpray™ RTX™ 2500PI

3300

3300

100

1.35

1.50

2.50

300 Ft.

300 Ft.

75 Ft.

2.8 HP MaxPower
Brushless DC

2.9 HP Xtreme Torque Brushless DC

1.7 HP AC

135 Lbs.

106 Lbs. (Hi-Boy)

72 Lbs.

Oil-Based Coatings,
Enamels, Latex,
Block Fillers, Elastomers,
Epoxies, Drywall Mud
and Other High
Build Materials

Oil-Based Coatings,
Enamels, Latex,
Block Fillers, Elastomers,
Epoxies, Drywall Mud,
Intumescent Fireproofing and
Other High Build Materials

Simulated Acoustics, Acrylics and
Drywall Mud

Medium to Large
Residential and
Commercial Interiors
and Exteriors

Medium to Large Residential
and Commercial Interiors
and Exteriors

Residential and Light
Commercial Interiors

Standard
1017-97405

Standard
1029-06195
ProContractor
1029-06203

1015-60290



Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy		
	 	 	 
MODEL	GRACO TexSpray™ RTX™ 5000PI	GRACO TexSpray™ RTX™ 5000PX	GRACO TexSpray™ RTX™ 5500PX
Maximum (PSI)	100	100	100
Gallons Per Minute (GPM)	5.00	5.00	5.50
Maximum Hose Length	100 Ft.	100 Ft.	100 Ft.
Motor	2.0 HP Brushless DC	2.0 HP Brushless DC	2.0 HP Brushless DC 240 Volts
Weight	159 Lbs.	163 Lbs.	163 Lbs.
Materials Sprayed	Simulated Acoustics, Acrylics and Drywall Mud, Elastomers, Deck Coatings, Synthetic Stuccos	Simulated Acoustics, Acrylics and Drywall Mud, Elastomers, Deck Coatings, Synthetic Stuccos	Simulated Acoustics, Acrylics and Drywall Mud, Elastomers, Deck Coatings, Synthetic Stuccos
Typical Applications	Residential and Commercial Interiors	Residential and Commercial Interiors and Exteriors	Residential and Commercial Interiors and Exteriors
Sales Number	1006-65033	1006-65041	1006-65058
CETL Certified	☑	☑	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Heavy



GRACO
GMAX II 5900 HD 3-in-1

GRACO
Mark X HD 3-in-1

GRACO
GMAX II 7900 HD 3-in-1

3300

3300

3300

1.60

2.10

2.20

300 Ft.

300 Ft.

300 Ft.

200cc Honda

4.0 HP Brushless DC 240 Volts

200cc Honda

147 Lbs.

142 Lbs.

159 Lbs.

Oil-Based Coatings,
Enamels, Latex
Block Fillers, Elastomers,
Epoxies, Drywall Mud
and Other High Build Materials

Oil-Based Coatings,
Enamels, Latex
Block Fillers, Elastomers,
Epoxies, Drywall Mud
and Other High Build Materials

Oil-Based Coatings,
Enamels, Latex
Block Fillers, Elastomers,
Epoxies, Drywall Mud
and Other High Build Materials

Medium to Large
Residential and Commercial Interiors and
Exteriors

Medium to Large
Residential and Commercial
Interiors and Exteriors

Medium to Large
Residential,
Commercial
Interiors, Exteriors
and Industrial

Standard
1017-97629
ProContractor™
1017-97645

Standard
1017-97454
ProContractor
1017-97462

Standard
1017-97652
ProContractor™
1017-97660
IronMan™
1017-97678






—



—

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy			
				
MODEL	GRACO DutyMax GH 230 HD 3-in-1	GRACO TexSpray™ HTX™ 2030	GRACO DutyMax GH 300 HD 3-in-1	GRACO TexSpray™ T-MAX 6912
Maximum (PSI)	3300	1000	3300	1000
Gallons Per Minute (GPM)	2.35	3.00	3.00	3.2
Maximum Hose Length	300 Ft.	300 Ft.	300 Ft.	200 Ft.
Motor	200cc Honda	200cc Honda	270cc Honda	2.0 HP Brushless DC
Weight	168 Lbs.	150 Lbs.	218 Lbs.	156 Lbs.
Materials Sprayed	Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials	Smooth to Heavily Aggregated Textures with Silica Sand, Perlite, Vermiculite, Polystyrene, in Smooth, Medium and Extra Coarse Grades	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High-Build Materials	Simulated Acoustic, Orange Peel, Splatter, Knockdown, Smooth, Level 5, Skim Coat, Textured Acrylics and Elastomers, EIFS, Synthetic Stucco Finish Coats, Deck Coatings
Typical Applications	Medium to Large Residential, Commercial Interiors, Exteriors and Industrial	Heavy-Duty Residential and Commercial Interiors and Exteriors	Heavy-Duty Residential and Commercial Interiors and Exteriors	Residential, Commercial and Industrial Interiors and Exteriors
Sales Number	Standard 1005-55861 ProContractor 1005-55879 —	570-9472 573-1971 with High Pressure 3300 PSI Paint Pump Kit	Standard 1005-55887 ProContractor 1005-55895	1018-93949 50 Ft. Assisted w/ STX Gun and Hopper 1018-92115 50 Ft. Airless w/ Lance Gun and Hopper 1019-34990 100 Ft. Air-Assisted w/ STX Gun and Hopper 1019-35096 100 Ft. Air-Assisted w/ STX Gun, Mixer and Hopper
CETL Certified	—	—	 With Optional Electric Conversion Kit	—









Standard Series Sprayers include:
Complete gun, hose and tip

ProContractor Series Sprayers include:
Endurance MaxLife pump, ProConnect, QuikReel, Crushproof Rock Catcher, gun, hose and tip

IronMan Series Sprayers include:
Endurance MaxLife EXTREME pump, ProConnect, Flatproof Tires, Crushproof Rock Catcher, gun, hose and tip

Air Compressors

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Air Compressors			
	 	 	 	 
MODEL	MI-T-M AM1-PE15-08M	MI-T-M AM1-PH65-08M	MI-T-M AM2-PH09-08M	MI-T-M ACS-23105-80VM
CFM	7.3 @ 90 PSI	13.9 @ 90 PSI	17.2 @ 175 PSI	18 @ 175 PSI
Horsepower	1.50	6.50	9.00	5.00
Motor & Engine	120V/13.2 Electric	196cc Honda OHV	270cc Honda OHV	230V/23.0A Single Phase
Receiving Tank	8 Gallon Twin Tank	8 Gallon Twin Tank	8 Gallon Twin Tank	80 Gallon Stationary
Stage	Single	Single	Two	Two
Net Weight	170 Lbs.	175 Lbs.	260 Lbs.	544 Lbs.
Sales Number	569-7453	964-4246	158-7765	924-3734

Ladders



Choosing a Ladder




Werner has simplified the ladder selection process. This new system links product, packaging and merchandising, making ladder selection as easy as 1, 2, 3.


Step 1: Select Height



To ensure you choose the ladder best suited to your needs, follow the Werner height safety chart as shown below:




Ladder Height	Max. Reach*
4'	8'
6'	10'
7'	11'
8'	12'
10'	14'
12'	16'
14'	18'
16'	20'

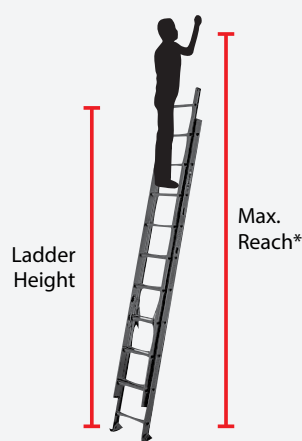

Ladder Height	Max. Reach*	Height to Gutter or Top Support Point†
16'	15'	9' max.
20'	19'	9' to 13'
24'	23'	13' to 17'
28'	27'	17' to 21'
32'	31'	21' to 25'
36'	34'	25' to 28'
40'	37'	28' to 31'

Average Home Heights

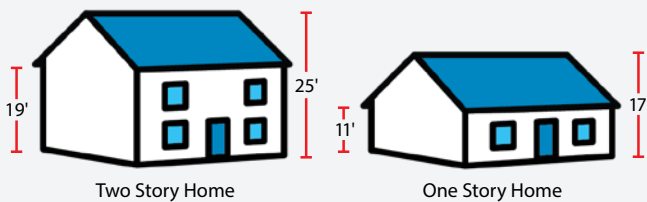


Support Points



*Assumes a 5'6" person with a vertical 12" reach.

†Support points for extension ladders reflect section overlap, ladder angle, and 3' extension above roof line.

Step 2: Select Performance

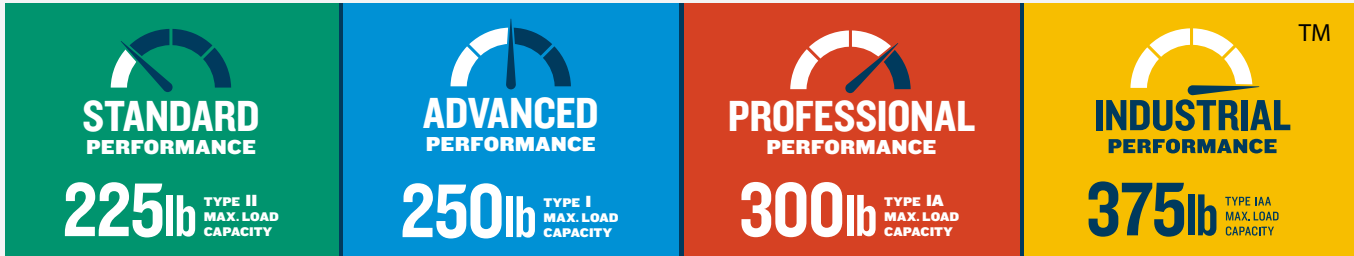

Combined Weight of User and Materials.

Approximate Material Weights			
Bundle of shingles	70 Lbs.	3 x 4 window	80 Lbs.
5 gallons of roof coating	70 Lbs.	Garage door opener	40 Lbs.
5 gallons of paint	60 Lbs.	Basketball hoop	60 Lbs.
Tool box with tools	35 Lbs.	Sheet of plywood	80 Lbs.
Portable sprayer	20 Lbs.	(3) 4 x 4s	80 Lbs.
Ceiling fan	30 Lbs.		

Step 3: Select Type



Fiberglass



- **Strength** – 7-layer construction
- **Safety** – For use around electricity
- **Durability** – Corrosion resistant
- Pro preferred
- Non-conductive side rails

Aluminum



- Lightweight
- Not for use around electricity
- Corrosion resistant

Ladders

Sherwin-Williams carries a complete line of accessories. See store for details.



Model 6006



Model 5904



Model D6224-2



Model SMS-48PL



Model VR401-W



Model I-CISC



Model I-IMCNT



Model AP-2030-MP3

SW Sales Number	Model Number	Description
FIBERGLASS LADDERS		
Load Capacity 225 Lbs. Type II		
400-2473	5904	4' Step Ladder
Load Capacity 250 Lbs. Type I		
610-9870	6004	4' Step Ladder
610-9979	6006	6' Step Ladder
447-7121	6008	8' Step Ladder
Load Capacity 300 Lbs. Type IA		
455-7781	6204	4' Step Ladder
403-5101	6206	6' Step Ladder
611-7923	6208	8' Step Ladder
611-7816	6210	10' Step Ladder
400-2440	6212	12' Step Ladder
1004-35106	PD6203	3' Podium Ladder
280-2783	D6224-2	24' Extension Ladder
400-0477	D6228-2	28' Extension Ladder
400-2317	D6232-2	32' Extension Ladder
PLANKS, SCAFFOLDS, OUTRIGGERS		
282-4431	PA208	Aluminum Ext. Plank 8'
611-7840	PA210	Aluminum Ext. Plank 10'
6513-15160	AP-2030-MP3	Adjustable Work Platform
593-1662	SRS-72	6' Steel Rolling Scaffold
594-0309	SMS-48PL	4' Portable Scaffold
597-4266	SRO-72-4	Outriggers
597-4282	SRG-72	Guard Rail & Toeboard Kit
1017-71244	I-CISC	6' Baker Utility Scaffold
1017-71137	I-IMCNT	4' Mini Folding Platform
TRUCK AND VAN RACKS		
916-1936	TR401-S	Removable Steel Truck Rack
916-1944	VR401-W	Steel Van Rack
MERCHANDISING DISPLAY		
164-4616	37	Werner Small Ladder Rack #37 OrderThrough ORDER EXPRESS
ACCESSORIES		
282-5479	AC10-20-02	Long Body Ladder Jack
796-8381	AC19-2	Extension Ladder Cover Kit
468-8081	AC78	Quickclick Stabilizer
151-4090	PK80-2	Level Master
435-9022	76-2	Pail Shelf

Ladders

Sherwin-Williams carries a complete line of accessories. See store for details.



SW Sales Number	Werner Model Number	Description
ALUMINUM LADDERS		
Load Capacity 225 Lbs. Type II		
611-7998	D1216-2	16' Extension Ladder
282-2286	D1220-2	20' Extension Ladder
139-1309	D1224-2AC96	24' Ext. Ladder w/Stabilizer
282-2302	D1228-2	28' Extension Ladder
611-8012	D1232-2	32' Extension Ladder
611-8020	D1240-2	40' Extension Ladder
3-Section 225 Lbs. Type II		
116-6917	D1224-3	24' 3-section Ext. Ladder
Load Capacity 225 Lbs. Type II w/Leveler		
234-7805	D1716-2EQ	16' Ext. Ladder w/Leveler
165-0704	D1724-2EQ	24' Ext. Ladder w/Leveler
Load Capacity 250 Lbs. Type I		
282-2195	366	6' Step Ladder
403-7966	D1316-2	16' Extension Ladder
403-7784	D1320-2	20' Extension Ladder
403-7917	D1324-2	24' Extension Ladder
403-7867	D1328-2	28' Extension Ladder
403-7941	D1332-2	32' Extension Ladder
404-5795	D1340-2	40' Extension Ladder
Load Capacity 300 Lbs. Type IA		
163-9087	150B	2' Step Ladder
400-4107	374	4' Step Ladder
282-2211	376	6' Step Ladder
282-2229	378	8' Step Ladder
400-2424	310	10' Step Ladder
403-4849	D1516-2	16' Extension Ladder
611-8038	D1520-2	20' Extension Ladder
282-5123	D1524-2	24' Extension Ladder
611-8046	D1528-2	28' Extension Ladder
282-2310	D1532-2	32' Extension Ladder
282-2336	D1540-2	40' Extension Ladder
6513-36794		15.5' Austram Hardware Extension Ladder
6513-39442		12.5' Austram Hardware Extension Ladder



Model D1224-3



Model D1520-2



Model D1716-2EQ



Model 366



Model 150B



Austram Hardware Extension Ladder

Ladders

Sherwin-Williams carries a complete line of accessories. See store for details.



Model 6004CA



Model 6005CA



Model 374CA



Model 150BCA



Model SRS-72CA



Model 6006CA



Model I-IMCNT



Austram Hardware
Extension Ladder



SW Sales Number	Model Number	Description
ALUMINUM LADDERS		
Load Capacity 300 Lbs. Grade 1A		
6508-77483	150BCA	2' Step Stool
1000-83849	374CA	4' Step Ladder
1000-83856	376CA	6' Step Ladder
6513-36794		15.5' Austram Hardware Extension Ladder
6513-39442		12.5' Austram Hardware Extension Ladder
FIBERGLASS LADDERS		
Load Capacity 250 Lbs. Grade 1		
1000-83880	6004CA	4' Step Ladder
1015-02771	6005CA	5' Step Ladder
1016-45802	6006CA	6' Step Ladder
1016-45794	6008CA	8' Step Ladder
SCAFFOLDS		
1000-84144	SRS-72CA	Steel Rolling Scaffold 6'
1017-71244	I-CISC	6' Baker Utility Scaffold
1017-71137	I-IMCNT	4' Mini Folding Platform





Model I-CISC

Ladders


Sherwin-Williams carries a complete line of accessories. See store for details.

Type	Scaffolding	
		
MODEL	METALTECH 3-Unit Scaffold Tower I-T3CISC	METALTECH Saferstack 2-Story Fixed Scaffold Tower M-MFT5710-A
Material	Steel	Steel
Load Capacity	1,000 Lbs.	2,500 Lbs.
Features	<ul style="list-style-type: none"> • Rugged 1-1/2" square tube steel construction with a yellow powder-coat finish • 5' double locking casters and a spring-loaded locking mechanism • Platform adjusts in 2' increments for versatility • Meets OSHA standards • Includes: 3 6' Baker style scaffolds, 3 platforms, 12 heavy-duty casters, 1 guardrail set, 1 set of 46" outriggers 	<ul style="list-style-type: none"> • Interlocking frames for safer storage and transport and takes up 30% less space than regular frames • Anti-slip, blue textured powder-coat finish for superior grip and secure footing • Fully adjustable to level scaffolding on uneven terrain • Meets OSHA standards • Includes: Guardrails, 3 aluminum platforms with 5/8" plywood deck, 8" casters or 24" leveling jacks
Height	18'	10'
Sales Number	1017-71384	Leveling Jacks 1017-71335 Casters 1017-71327

Sherwin-Williams carries a complete line of accessories. See store for details.

Type	Stilts	
	 <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>USA CANADA</p>	 <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>TOOLPRO TOOLS FOR PROFESSIONALS</p> <p>USA</p>
MODEL	TOOLPRO Aluminum Stilts	TOOLPRO Magnesium Alloy Stilts
Material	Aluminum	Magnesium Alloy
Load Capacity	225 Lbs.	225 Lbs.
Features	<ul style="list-style-type: none"> • Aircraft-grade aluminum stilts are adjustable (24" - 40") • Thick soles offer excellent traction and are resistant to wear and tear • Webbed straps and padded calf braces for secure, all-day comfort • Part and repair kits available 	<ul style="list-style-type: none"> • Premium adjustable (24" - 40") magnesium alloy stilts are lightweight without sacrificing strength • Thick soles offer excellent traction and are resistant to wear and tear • Webbed straps and padded calf braces for secure, all-day comfort. • Part and repair kits available
Sales Number	1005-46647	111-9692

Generators and Portable Heaters

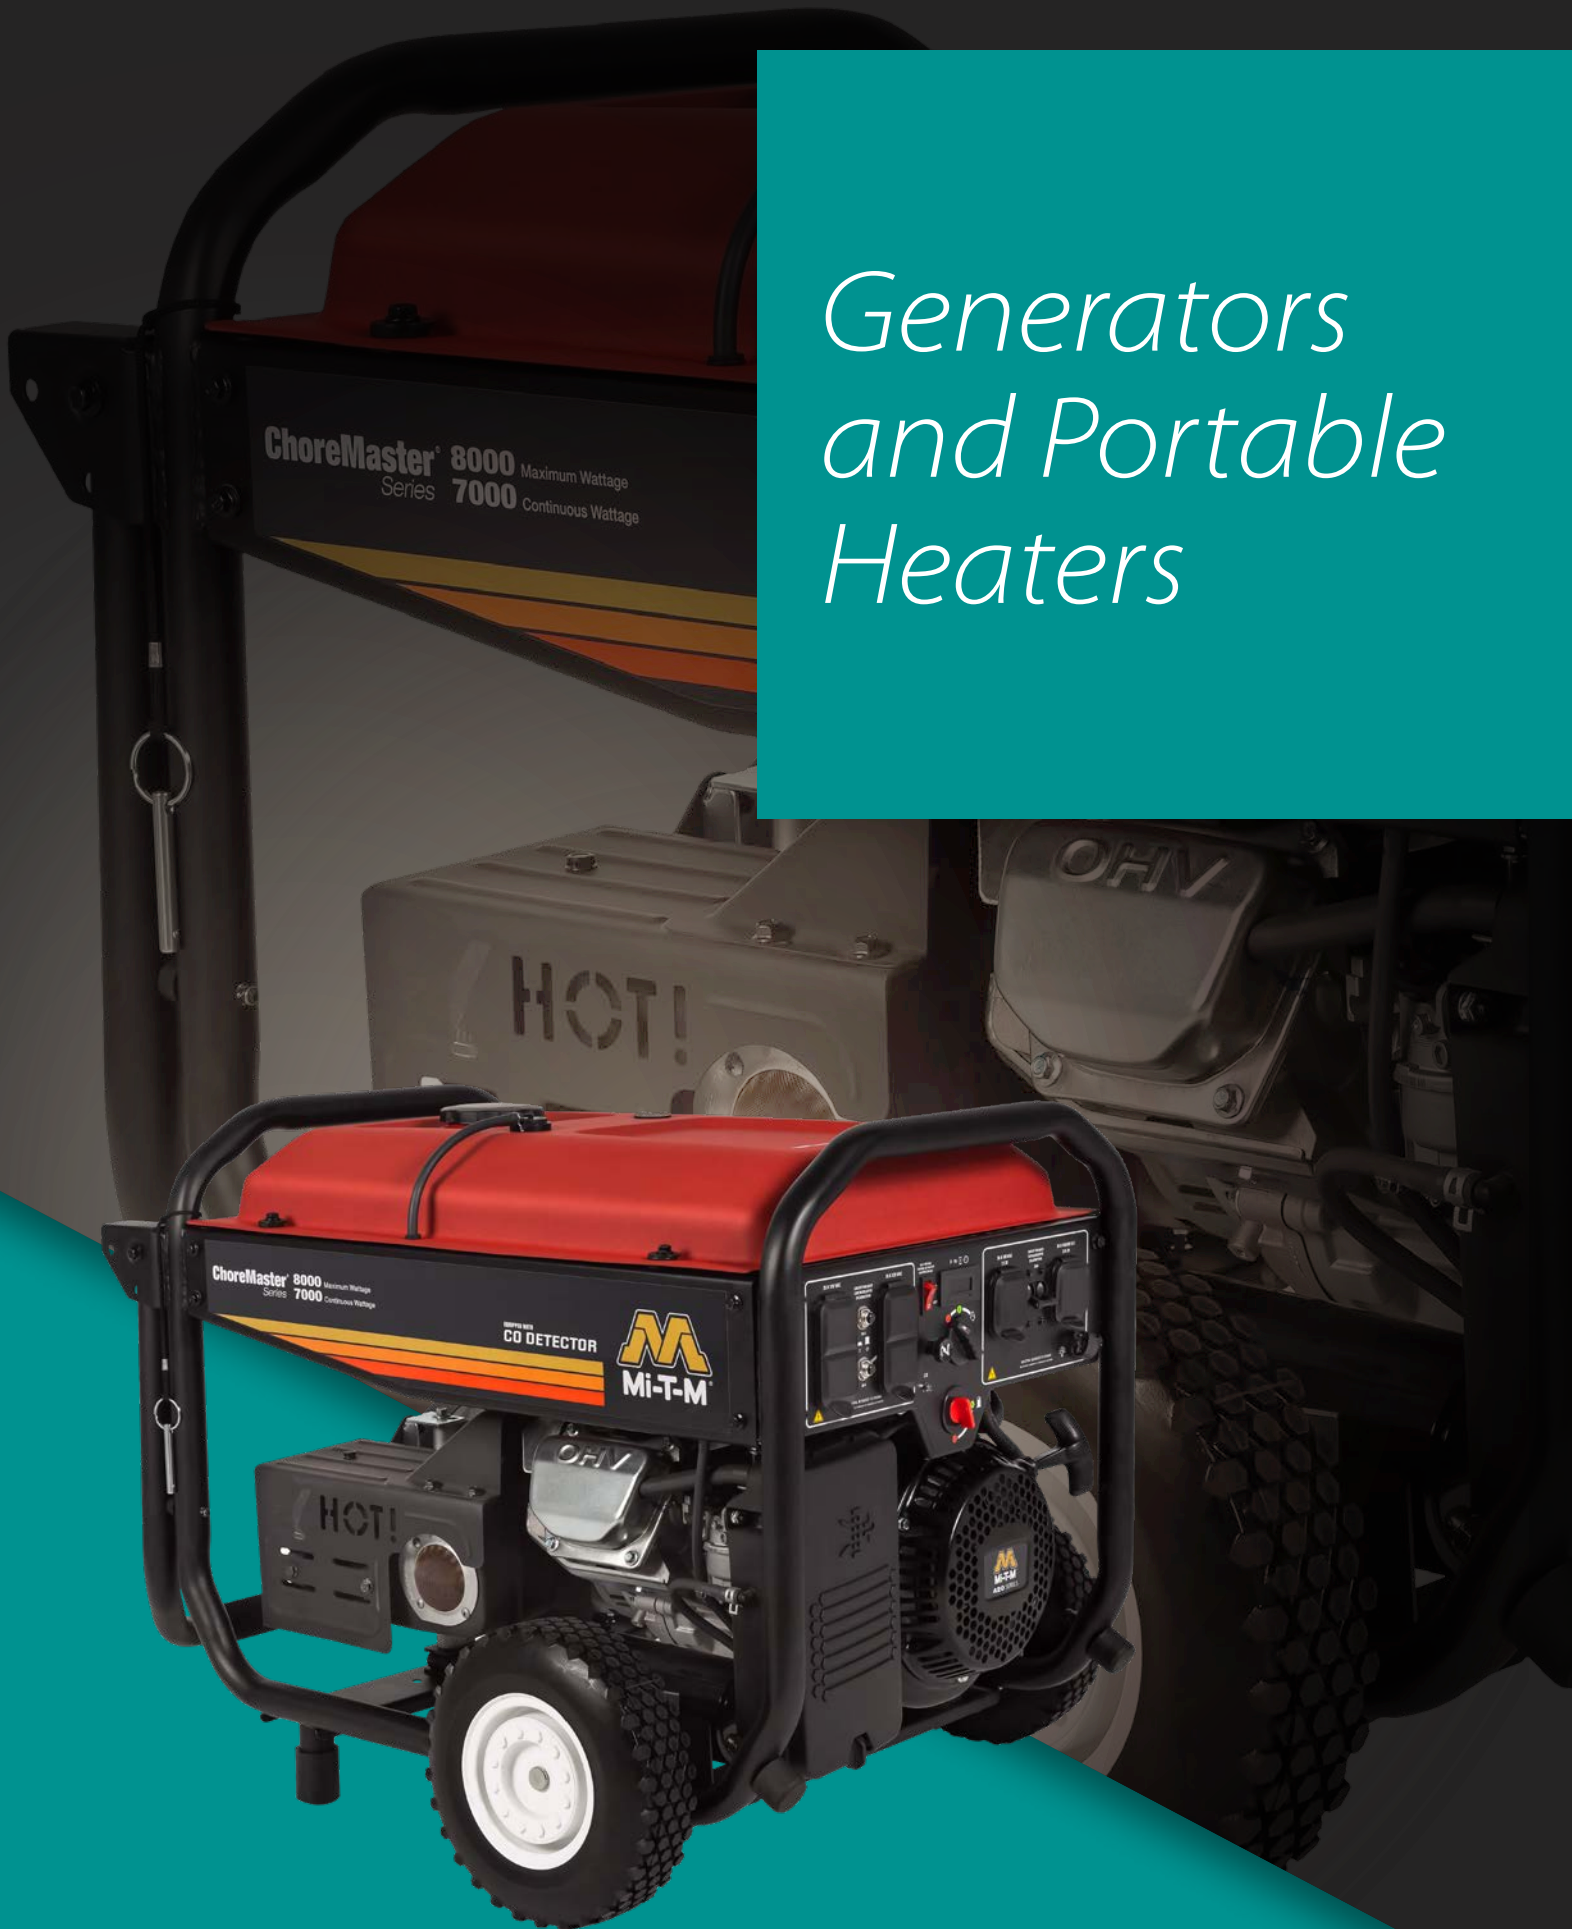

Choosing a Generator


Selecting the right generator size depends on what you want to power.

Is your generator large enough to handle the job?



Add up the total watts of all lights, appliances, tools and other equipment to be connected to the generator. Be sure you select a generator that is large enough to handle both your current requirements and future needs.

Note: Check nameplates to determine wattage. If wattage is not shown but amps and voltage are given, use the formula below.

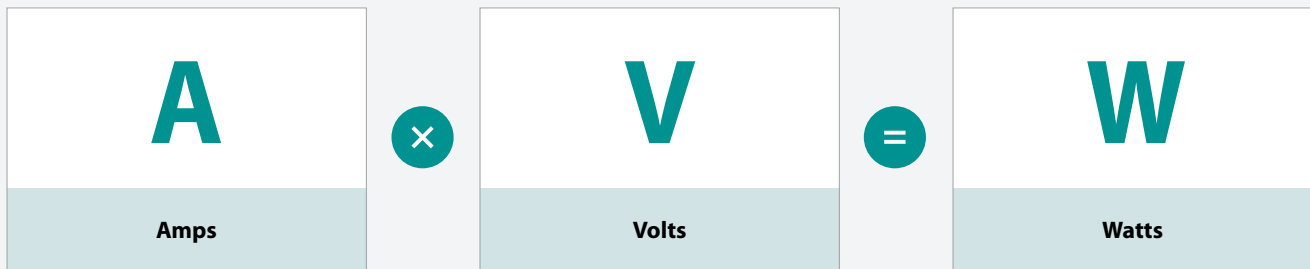

Example: 12.5 Amps x 120 Volts = 1500 Watts

Here are some examples of common wattage requirements:

Equipment	Wattage (approximate)
Space heater	200 – 1500
Compressor	200 – 2200
Drain cleaners	250
Drills (¼" – 1")	250 – 1000
Electric blower	400 – 2200
Portable grinder	1000 – 2500


Choosing a Heater

Selecting the right heater depends on the size of the space you want to warm.

Is your heater large enough to handle the job?



In general:

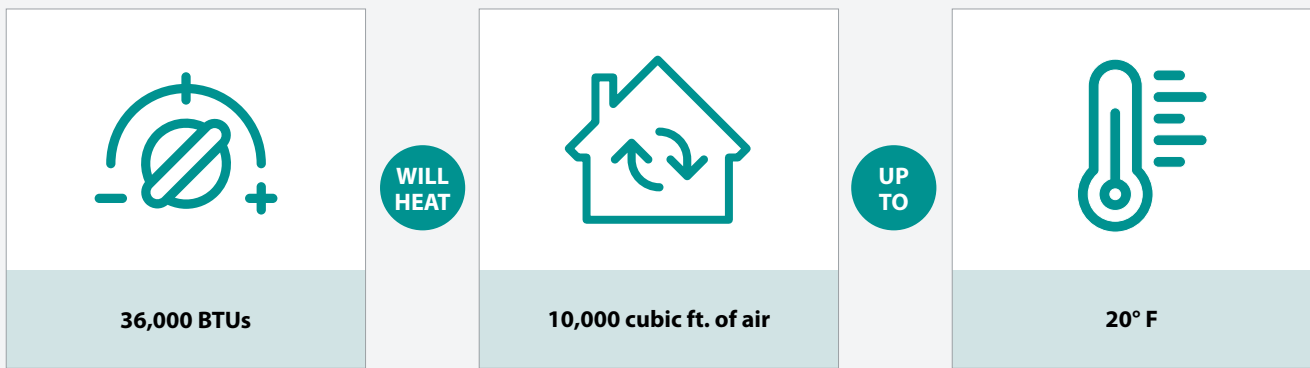

It is also important to choose the correct fuel for your heater. Kerosene is an inexpensive option that provides consistent heat, perfect for warming everything from workshops to construction sites.

Note: Proper ventilation is required during operation.

Generators

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Generators	
	 	 
MODEL	MI-T-M ChoreMaster® 6500	MI-T-M ChoreMaster® 8000
Max. AC Output	6500 Watts	8000 Watts
Rated AC Output	6500 Watts	7200 Watts
Engine	420cc Mi-T-M OHV	420cc Mi-T-M OHV with Electric Start
CO Detector	Yes	Yes
Frequency (Hertz)	60	60
Receptacles	(2) 120V, 20A GFCI Duplex; (1) 120V, 30A Twist Lock, (1) 120V/240V, 30A Twist Lock	(2) 120V, 20A GFCI Duplex; (1) 120V, 30A Twist Lock, (1) 120V/240V, 30A Twist Lock
Max. Amps (120V/240V)	54.1/27.0	66.6/33.3
Continuous Amps (120V/240V)	54.1/27.0	60.0/30.0
Fuel Capacity	7.53 Gallons	7.53 Gallons
Run Time @ Full Load	8.8 Hrs.	6.5 Hrs.
Weight	183 Lbs.	192 Lbs.
Sales Number	1028-18952	1028-37937

Portable Heaters

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Portable Heaters	
		
MODEL	MI-T-M MH-0135-0M11	MI-T-M MH-0190-0M11
Heat Output (BTU)	135,000	190,000
Hot Air Flow	321 CFM	409 CFM
AC Power	120V, 60Hz, 2.1 Amps	120V, 60Hz, 2.5 Amps
Motor Size	1/3 HP	1/2 HP
Fuel Tank Capacity	10.6 Gallons	13.2 Gallons
Fuel Consumption	0.97 Gal./Hr.	1.37 Gal./Hr.
Max. Operating Hours	11 Hrs.	10 Hrs.
Heating Area	3,375 Sq. Ft.	4,750 Sq. Ft.
Weight (Net)	54 Lbs.	61 Lbs.
Sales Number	1027-32617	1028-37127



Offering the Finest Spray Equipment Repair Service

At Sherwin-Williams, you'll get the most complete line of quality paints, stains, masonry coatings and painting supplies, backed by expert technical advice and more than 4,000 locations. Call (800) 524-5979 to have a professional representative contact you.

Below you will find your local Sherwin-Williams paint sprayer equipment repair and maintenance locations.

State	Address	City	Phone
AL	5250 KOOIMAN RD	MOBILE	(251) 443-6572
AL	621 MERIDIAN ST N	HUNTSVILLE	(256) 533-2292
AL	1501 3RD AVE S	BIRMINGHAM	(205) 251-4125
AK	245 POST RD	ANCHORAGE	(907) 272-5550
AZ	2135 E JONES AVE	PHOENIX	(602) 254-7310
AZ	1311 E AJO WAY STE 121	TUCSON	(520) 617-0326
AR	3855 TREAT LN	SPRINGDALE	(479) 751-2721
CA	2913 UNICORN RD	BAKERSFIELD	(661) 399-2987
CA	15725 SATICOY ST	VAN NUYS	(818) 785-3003
CA	1015 N MARKET BLVD STE 1	SACRAMENTO	(916) 574-9560
CA	5459 E LAMONA AVE	FRESNO	(559) 252-3371
CA	17500 SOUTH MAIN ST	GARDENA	(310) 329-0831
CA	6625 MIRAMAR RD	SAN DIEGO	(858) 453-6260
CA	4925 CONVOY ST	SAN DIEGO	(858) 292-5391
CA	2412 COHASSET RD #A	CHICO	(530) 342-0147
CO	1441 W BAYAUD AVE STE 2B	DENVER	(303) 777-3434
CO	845 NORTH AVE	GRAND JUNCTION	(970) 242-6515
CO	1370 N NEWPORT RD	COLORADO SPRINGS	(719) 597-6556
CT	2 MONTOWESE AVE	NORTH HAVEN	(203) 745-5238
DE	70 SOUTHGATE BLVD	NEW CASTLE	(302) 328-7660
FL	3117 N PALAFOX ST	PENSACOLA	(850) 432-4173
FL	4206 N ORANGE BLOSSOM TRL	ORLANDO	(407) 291-8952
FL	12215 S CLEVELAND AVE	FORT MYERS	(239) 936-8558
FL	6192 TOWNSEND RD	JACKSONVILLE	(904) 771-3511
GA	351 S HOUSTON LAKE RD	WARNER ROBINS	(478) 971-1402
GA	524 LYLE CIR	LAWRENCEVILLE	(770) 963-8174
GA	141 CHALLENGER CT	COLUMBUS	(706) 322-1553
GA	1851 CHATHAM PKWY	SAVANNAH	(912) 239-9795
GA	2709 PEACH ORCHARD RD	AUGUSTA	(706) 796-3865
ID	3500 E COMMERCIAL CT #102	MERIDIAN	(208) 887-9550
IL	796 E WOOD ST	DECATUR	(217) 429-4205
IL	1022 W PIONEER PKY	PEORIA	(309) 691-4058
IL	510 ARMORY DR	SOUTH HOLLAND	(708) 339-8110
IL	2950 OGDEN AVE STE 105	LISLE	(630) 778-6396
IN	3425 N CLINTON ST	FORT WAYNE	(260) 484-8508
IN	221 S FRANKLIN RD BLDG 7-G	INDIANAPOLIS	(317) 898-9261
IA	3548 STATE ST	BETTENDORF	(563) 441-0144
IA	3501 J ST SW	CEDAR RAPIDS	(319) 364-5036
IA	920 MORGAN ST STET	DES MOINES	(515) 280-3365

Locations subject to change.

Service Centers

State	Address	City	Phone
KS	1705 N WABASH ST	WICHITA	(316) 265-6291
KY	4702A POPLAR LEVEL RD	LOUISVILLE	(502) 969-1125
KY	915 MURRAY DR STE 329	LEXINGTON	(859) 255-7736
LA	4925C JEFFERSON HWY	JEFFERSON	(504) 733-9051
LA	3204 W 70TH STREET	SHREVEPORT	(318) 686-7341
LA	5807 SIEGEN LANE	BATON ROUGE	(225) 293-0203
LA	5740 JONES CREEK RD	BATON ROUGE	(225) 751-6202
ME	100 LARRABEE RD STE 300	WESTBROOK	(207) 856-6766
MD	11 S CENTRAL AVE	BALTIMORE	(410) 732-4887
MD	6401-2 VIRGINIA MANOR RD	BELTSVILLE	(301) 902-3090
MA	59 HICKS AVE	MEDFORD	(781) 396-5544
MI	8675 RONDA DR	CANTON	(734) 414-9300
MI	13415 LYNDON ST	DETROIT	(313) 491-5650
MI	6030 CLYDE PARK AVE SW STE E	BYRON CENTER	(616) 551-2644
MI	440 CESAR E. CHAVEZ AVE SW	GRAND RAPIDS	(616) 456-1438
MN	284 E LAFAYETTE FRONTAGE RD	SAINT PAUL	(651) 224-5337
MS	526 W MAIN ST	TUPELO	(662) 842-4882
MS	700 US HIGHWAY 49 S #B	RICHLAND	(601) 939-4537
MO	535 E SAINT LOUIS ST	SPRINGFIELD	(417) 862-7483
MO	1737 MACON ST	N KANSAS CITY	(816) 283-0444
MO	2145 SCHUETZ RD	ST LOUIS	(314) 567-1111
MT	2051 ROSEBUD DR	BILLINGS	(406) 655-9801
NE	208 NW 20TH ST	LINCOLN	(402) 476-3100
NE	9317 J ST	OMAHA	(402) 592-0770
NV	6285 S VALLEY VIEW BL #I	LAS VEGAS	(702) 382-4994
NJ	185 MOONACHIE RD	MOONACHIE	(201) 440-2660
NJ	1451 ROUTE 38	HAINESPORT	(609) 267-8666
NY	830 EMERSON ST	ROCHESTER	(585) 458-3120
NY	2578 WALDEN AVE	CHEEKTOWAGA	(716) 685-1444
NY	2380 ERIE BLVD EAST	SYRACUSE	(315) 446-1762
NY	130 WOLF ROAD	ALBANY	(518) 459-1050
NC	1415 E BESSEMER AVE	GREENSBORO	(336) 275-3331
NC	4601 EQUIPMENT DR	CHARLOTTE	(704) 596-4705
NC	651 PETERS CREEK PKWY	WINSTON SALEM	(336) 722-1311
NC	6601 HILLSBOROUGH ST STE 119	RALEIGH	(919) 854-7701
OH	2872 CENTER RD	BRUNSWICK	(330) 225-9729
OH	3062 MONROE ST	TOLEDO	(419) 243-8121
OH	4028 E BROAD ST	COLUMBUS	(614) 235-4453
OH	2390 ARBOR BLVD	DAYTON	(937) 298-8691
OH	1150 W 8TH ST STE 112	CINCINNATI	(513) 621-1630
OK	300 S WESTERN AVE	OKLAHOMA CITY	(405) 236-8621
OK	3699 S 73RD EAST AVE	TULSA	(918) 664-5694
OK	3699 S 73RD EAST AVE	TULSA	(918) 660-0997

Locations subject to change.

State/Territory	City	Address	Phone
OR	3390 W 11TH ST #B	EUGENE	(541) 345-5130
PA	1512 E COLUMBIA ST	ALLENTOWN	(610) 435-9210
PA	37 BALTIMORE PIKE	SPRINGFIELD	(610) 328-0788
PA	1100 WESTERN AVE	PITTSBURGH	(412) 322-2923
PA	811 SOUTH WASHINGTON AVE	SCRANTON	(570) 342-9276
PR	HWY 190 KMO.8 MARGINAL VISTA M	SAN JUAN	(787) 752-1400
RI	77 WALNUT ST	WARWICK	(401) 781-6615
SC	MOSS CREEK VILLAGE	HILTON HEAD	(843) 707-9196
SC	1626 PLAZA PLACE	MYRTLE BEACH	(843) 448-6128
SC	2529 FOREST DR	COLUMBIA	(803) 256-3427
SC	5350 RIVERS AVE	N CHARLESTON	(843) 740-1363
SC	1139 WHITE HORSE RD	GREENVILLE	(864) 236-9116
TN	6201 BAUM DR	KNOXVILLE	(865) 584-8624
TN	1315 E 23RD ST	CHATTANOOGA	(423) 624-1055
TN	701 LEA AVE	NASHVILLE	(615) 256-1157
TN	3850 LAMAR AVE STE 1	MEMPHIS	(901) 368-6001
TX	1015 EASTSIDE RD.	EL PASO	(915) 772-1704
TX	5001 JOHN BEN SHEPPARD PKWY	ODESSA	(432) 366-1203
TX	11233 LEO LANE	DALLAS	(972) 241-0902
TX	6448 LONG POINT	HOUSTON	(713) 263-9029
TX	305 S BECKHAM AVE	TYLER	(903) 592-6537
TX	525 LAKE AIR DR	WACO	(254) 776-0720
TX	4243 INDUSTRIAL CENTER	SAN ANTONIO	(210) 653-7125
UT	3171 W 2100 S	WEST VALLEY CITY	(801) 975-1726
VA	6564 W BROAD ST	RICHMOND	(804) 285-8231
VA	14510 LEE RD STE M-R	CHANTILLY	(703) 968-7324
VA	2100 FORT AVENUE	LYNCHBURG	(434) 847-4722
VA	6707 WILLIAMSON RD	ROANOKE	(540) 366-3467
VA	1373 INGLESIDE RD	NORFOLK	(757) 853-4371
WA	3200 E TRENT AVE BLDG 2 STE C	SPOKANE	(509) 536-9700
WI	2030 S STOUGHTON RD	MADISON	(608) 226-0602
WI	6634 W NORTH AVE	WAUWATOSA	(414) 259-5116
WI	130 N KOELLER ST	OSHKOSH	(920) 231-8030
WI	1427 S HASTINGS WAY	EAU CLAIRE	(715) 835-4323
WI	3902 CIRCLE DR	HOLMEN	(608) 781-1009
WI	1053 WAUBE LN	ASHWAUBENON	(920) 339-6150

Locations subject to change.

*Sanding,
Abrasives
and Dust
Extractors*





Choosing the Right Festool® Sander

All Festool® sanders are performance-tuned for excellent results, less vibration, and with optimum dust management design for cleaner surfaces and cleaner work environments in the shop or on the jobsite.

What are your productivity needs?



If you need...	Choose the following sander
More flexibility for less fatigue	ETS EC 125/3 EQ
A great sander for drywall and ceiling texture removal	PLANEX Easy LHS-E 225
A sander for tight corners and fine finishes	DTS 400 REQ-Plus
Exceptional performance for flat and vertical spaces	RTS 400 REQ-Plus
A versatile sander from heavy removal to finishing	ROTEX RO 90 FEQ-Plus
All-around performance for general purpose spaces	ROTEX RO 125 FEQ-Plus
Heavy-duty, powerful performance for aggressive removal	ROTEX RO 150 FEQ-Plus
Organization and compact storage for ease of mobility	Assortment Abrasive Systainer ³

Choosing the Right Festool® Abrasives

Granat is Festool's most long-lasting and highest-performing abrasive. It is well suited for nearly all applications, including:

- ✓ **Solid wood**
- ✓ **Composite wood**
- ✓ **Varnish**
- ✓ **Paint**
- ✓ **Drywall/filler**
- ✓ **Metal**
- ✓ **Solid surface**
- ✓ **Fiberglass**
- ✓ **Plastic**

What sander model are you using?



For these sander models...	Use these Granat abrasives
RO 90	P40 – P1500 Grit
RO 125, ETS 125, ETS EC 125, RO 150	P40 – P1500 Grit
DTS 400, RTS 400	P40 – P400 Grit
PLANEX LHS	P40 – P320 Grit

Choosing the Right Festool® Dust Extractor

Stay clean and efficient with Festool's Dust Extraction systems. They provide quicker cleanup and smoother finishes while helping to protect the air you breathe.

What is your jobsite environment like?



When choosing a Festool Dust Extraction system, consider:

1. Types of work at your jobsite:

Sawing	Sanding
Routing	Drilling
Planing	Cleaning

2. Volume and forms of debris:

Minimal	Fine/drywall
Moderate	Wet
Large	


Additional features:




On-site cleanup



Bluetooth® integration







Mobility/portability



Capacity

Sanders

Sherwin-Williams carries a complete line of accessories. See store for details.

Performance Needs	Flexible, Less Fatigue	Drywall Sander, Wall Cleaner & Texture Removal	Corner & Edge Ranged Performance	
				
MODEL	ETS EC 125/3 EQ	PLANEX EASY LHS-E 225	PLANEX LHS-2 225	DTS 400 REQ-PLUS
Standard Package Includes	StickFix Soft Sander Backing Pad Plug-It Power Cord Systainer ³ SYS3 M 187	StickFix Sanding Pad — Extra Soft Plug-It Power Cord LHS-E 225 Carrying Bag	5X Granat P180 Sanding Pad 220mm Plug-It Power Cord Interface Pad Systainer ³ SYS3 XXL 337	StickFix Soft Sander Backing Pad 100x150 Plug-It Power Cord Edge Protector Long-life Dust Bag Systainer ³ SYS3 M 187
Power Consumption	400 Watts	400 Watts	400 Watts	250 Watts
Speed	Eccentric Motion Speed 6,000 – 10,000 RPM	Idle Engine Speed 400 – 920 RPM	Eccentric 5,000 – 8,500 RPM	Idle Engine Speed 6,000 – 12,000 RPM
Sanding Pad Dia.	Interchangeable 5" (125 mm)	Interchangeable 8.5" (220 mm) Abrasive dia. 8.9" (225 mm)	8-7/8" (225 mm)	Interchangeable 3-15/16" x 5-29/32" (100 mm x 150 mm)
Sanding Stroke	1/8" (3 mm)	—	3/16" (4 mm)	1/16" (2 mm)
Dust Extraction Connection Dia.	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" / 1-7/16" (27 mm/36 mm)	1-1/16" (27 mm)
Weight	2.65 Lbs. (1.2 kg)	8.8 Lbs. (4 kg)	8.82 Lbs. (4 kg)	2.65 Lbs. (1.2 kg)
Sales Number	1022-29267	1014-88302	1023-34539	1020-66024

Sherwin-Williams carries a complete line of accessories. See store for details.

Flat & Vertical Ranged Performance	Versatile Performance	All-Around Performance	Heavy-Duty Performance
			
RTS 400 REQ-PLUS	ROTEX RO 90 FEQ-PLUS	ROTEX RO 125 FEQ-PLUS	ROTEX RO 150 FEQ-PLUS
StickFix Soft Sander Backing Pad 80x133 Plug-It Power Cord Edge Protector Long-life Dust Bag Systainer ³ SYS3 M 187	FastFix Round Soft Sander Backing Pad Delta Sanding Pad & Edge Protector Plug-It Power Cord Systainer ³ SYS3 M 187	FastFix Round Soft Sander Backing Pad Edge Protector Plug-It Power Cord Systainer ³ SYS3 M 187	FastFix Round Soft Sander Backing Pad Edge Protector Plug-It Power Cord Systainer ³ SYS3M 237
250 Watts	400 Watts	500 Watts	720 Watts
Idle Engine Speed 6,000 – 12,000 RPM	Rotex Rotary 260 – 520 RPM Eccentric 3,500 – 7,000 RPM	Rotex Rotary 300 – 600 RPM Eccentric 3,000 – 6,000 RPM	Rotex Rotary 320 – 660 RPM Eccentric 3,300 – 6,800 RPM
Interchangeable 3-5/32" x 5-1/4" (80 mm x 133 mm)	FastFix 3.5" (90 mm)	FastFix 5" (125 mm)	FastFix 6" (150 mm)
1/16" (2 mm)	1/8" (3 mm)	9/64" (3.6 mm)	3/16" (5 mm)
1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)
2.65 Lbs. (1.2 kg)	3.31 Lbs. (1.5 kg)	4.19 Lbs. (1.9 kg)	5.07 Lbs. (2.3 kg)
1020-66016	1023-34554	1015-84795	1021-25523

Backing Pads/Accessories

Sherwin-Williams carries a complete line of accessories. See store for details.

For use with sander model:

RO 90 FEQ – 3.5" (90 mm)



FastFix Sander Backing Pad – Soft

- High-temp resistant for heavy-duty applications

1014-30825



Interface Sander Backing Pad

- For profiles and contours

1014-30833



Sander Backing Pads 2x

- Hard – Snap Stud

1014-30247

For use with sander model:

RO 125 FEQ – 5" (125 mm)



FastFix Sander Backing Pad – Soft

- High-temp resistant for heavy-duty applications

1014-30577

For use with sander model:

RO 150 FEQ – 6" (150 mm)



FastFix Sander Backing Pad - Soft

- High-temp resistant for heavy-duty applications

1015-85750

For use with sander model:

ETS EC 125/3 - 5" (125 mm)



Sander Backing Pad – Soft

- Regular density for most general-purpose applications

1014-30023



Assortment Abrasive Systainer³ 90 SYS-STF D90/93V GR

1023-34471

Includes:

V93	P60	10 qty
V93	P80	10 qty
V93	P120	10 qty
V93	P180	10 qty
D90	P60	10 qty
D90	P80	20 qty
D90	P120	20 qty
D90	P180	10 qty
D90	Interface Pad	1 qty

Sherwin-Williams carries a complete line of accessories. See store for details.

Granat abrasives compatible with sander model:		
RO 90		
Grit	Qty.	Sales Number
P80 (triangular)	50	1014-30593
P120 (triangular)	100	1014-30601
P180 (triangular)	100	1014-30619
P220 (triangular)	100	1014-45344
P60 (orbital)	50	1014-30528
P80 (orbital)	50	1014-30536
P120 (orbital)	100	1014-30544
P180 (orbital)	100	1014-30551
P220 (orbital)	100	1014-45435

Granat abrasives compatible with sander models:		
RTS 400, RTSC 400, LS 130		
Grit	Qty.	Sales Number
P80	50	1014-30221
P120	100	1014-30239
P180	100	1014-30254
P220	100	1014-45336

Granat abrasives compatible with sander models:		
DTS 400, DTSC 400		
Grit	Qty.	Sales Number
P80	50	1014-30338
P120	100	1014-30346
P180	100	1014-30254
P220	100	1014-45336

Granat abrasives compatible with sander models:		
RO 125, ETS 125, ETSC 125, ETS EC 125		
Grit	Qty.	Sales Number
P60	50	1014-30478
P80	50	1014-30486
P120	100	1014-30494
P180	100	1014-30502
P220	100	1014-45468



Assortment Abrasive Systemer³ 125 SYS-STF D125 GR

1023-34463





Includes:

D125	P60	10 qty
D125	P80	25 qty
D125	P120	25 qty
D125	P180	20 qty
D125	P220	20 qty
D125	Interface Pad	1 qty

Granat abrasives compatible with sander models:		
RO 150, ETS EC 150, ETS 150		
Grit	Qty.	Sales Number
P80	50	1015-85305
P120	100	1015-85321
P180	100	1015-85354
P220	100	1015-85362

Dust Extractors

Sherwin-Williams carries a complete line of accessories. See store for details.

Performance Needs	 <p>Medium Debris, Excellent Dust Capture, Medium Capacity</p>	 <p>Fine Dust Debris, High-Performance Capture, XL Capacity</p>
		
MODEL	CT MIDI I *Can be used with most sanders	CT 36 E AC HEPA *For use with Planex sanders
Standard Package Includes	Anti-Static Suction Hose 1-1/16" x 11.5' (27 mm x 3.5 m) Filters HEPA (1 piece) Disposable Filter Bag (1 piece)	Anti-Static Suction Hose 1-7/16" x 11.5' (36 mm x 3.5 m) Filters HEPA (1 piece) Disposable Filter Bag (1 piece) Plastic Liner (1 piece)
Power Consumption	400 – 1,200 Watts	350 – 1,200 Watts
Container Capacity	4 Gal. (15 L)	9.5 Gal. (36 L)
Filter Bag Capacity	3.3 Gal. (12.5 L)	9.0 Gal. (34 L)
Dimensions (L x W x H)	18-1/2" x 12-19/32" x 19-1/2" (470 mm x 320 mm x 495 mm)	25" x 14-3/8" x 23-1/2" (635 mm x 365 mm x 597 mm)
Max Suction Capacity	130 CFM (3,700 L/min)	137 CFM (3,900 L/min)
Weight	24.91 Lbs. (11.3 kg)	33.51 Lbs. (15.2 kg)
Sales Number	6511-30379	1015-84712

Dust Extractor Accessories

Sherwin-Williams carries a complete line of accessories. See store for details.



Standard Cleaning Set

- Compact and lightweight set for quick cleanup in confined spaces.

1025-37867

Includes:

Dust extractor tube	Suction brush
Extension tube (3x)	Floor nozzle
Crevice nozzle	SYS3 M 137



Suction Brush D 36 SP

- Dia. 2-13/16" (71 mm). Accepts D 27 mm and D 36 mm hoses and tubes.

1014-30692



SELF CLEAN Filter Bag – CT MIDI (5 pieces)

- For CT MIDI units manufactured prior to 2019.

1014-30932



SHERWIN-WILLIAMS®

**THE SINGLE SOURCE FOR ALL
YOUR EQUIPMENT NEEDS.**